



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 13.7

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

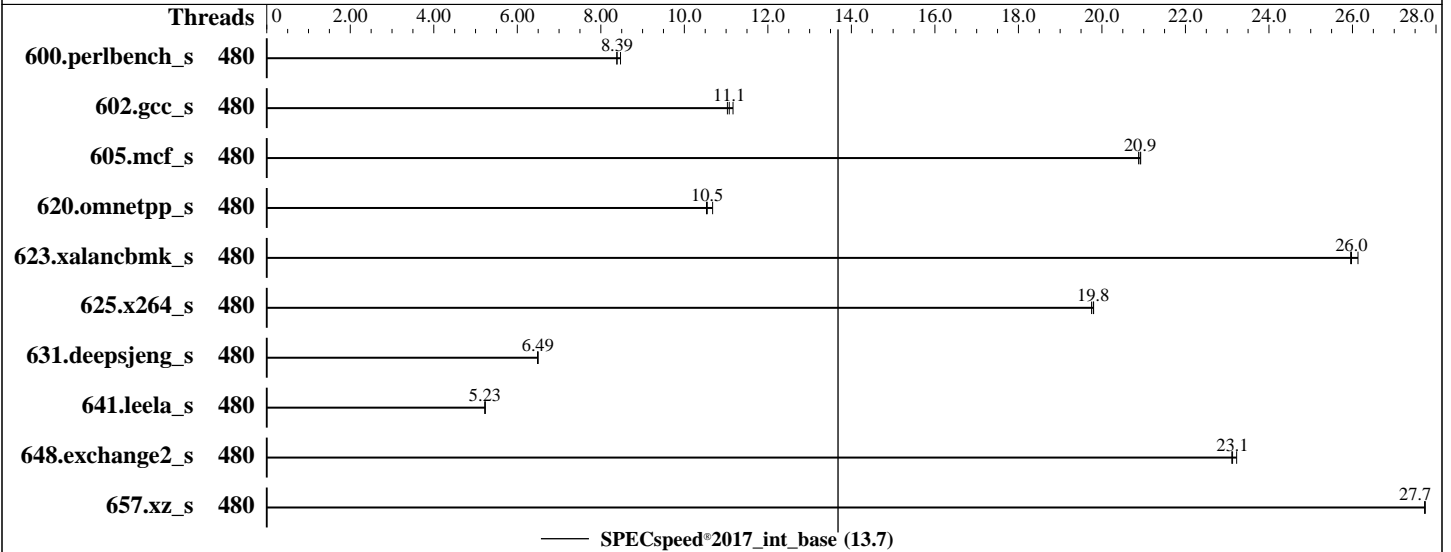

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960GB M.2 NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version RSE105E 1.10 released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	480	212	8.39	212	8.38	210	8.47									
602.gcc_s	480	361	11.0	360	11.1	357	11.2									
605.mcf_s	480	226	20.9	226	20.9	226	20.9									
620.omnetpp_s	480	155	10.5	155	10.5	153	10.7									
623.xalancbmk_s	480	54.6	26.0	54.5	26.0	54.2	26.1									
625.x264_s	480	89.3	19.8	89.1	19.8	89.1	19.8									
631.deepsjeng_s	480	221	6.48	221	6.49	221	6.50									
641.leela_s	480	326	5.23	326	5.23	326	5.23									
648.exchange2_s	480	127	23.1	127	23.2	127	23.1									
657.xz_s	480	223	27.7	223	27.7	223	27.7									

SPECspeed®2017_int_base = 13.7

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 13.7

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-State set to Legacy

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun Jul 30 13:03:38 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:03:38 up 11:59, 1 user, load average: 192.48, 393.62, 442.70
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	01:07	11:53m	0.96s	0.00s	-bash

3. Username
From environment variable \$USER: root

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 8255136
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size            (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes     (-u) 8255136
virtual memory         (kbytes, -v) unlimited
file locks            (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.214/templots/preenv.intspeed.214.0.log --lognum 214.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0001b0
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapsg
cpu cores     : 60
siblings      : 120
4 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 13.7

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 480
On-line CPU(s) list:   0-479
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8490H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):              4
Stepping:               8
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             11.3 MiB (240 instances)
L1i cache:             7.5 MiB (240 instances)
L2 cache:              480 MiB (240 instances)
L3 cache:              450 MiB (4 instances)
NUMA node(s):          4
NUMA node0 CPU(s):    0-59,240-299
NUMA node1 CPU(s):    60-119,300-359
NUMA node2 CPU(s):    120-179,360-419
NUMA node3 CPU(s):    180-239,420-479
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 13.7

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-59,240-299
node 0 size: 515727 MB
node 0 free: 512352 MB
node 1 cpus: 60-119,300-359
node 1 size: 516065 MB
node 1 free: 513746 MB
node 2 cpus: 120-179,360-419
node 2 size: 516065 MB
node 2 free: 513667 MB
node 3 cpus: 180-239,420-479
node 3 size: 515948 MB
node 3 free: 513597 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10

```

9. /proc/meminfo

MemTotal: 2113339252 kB

10. who -r

run-level 3 Jul 30 01:06

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd chronyd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm
grub2-once haveged-switch-root ipmi ipmievad issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpcbind rpmconfigcheck
rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 13.7

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

generated ntp_sync
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=39b62cad-8791-4e9f-8882-c2af12880769
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 894G 26G 869G 3% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR850 V3
Product Family: ThinkSystem
Serial: None

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
21x SK Hynix HMC94AEBRA102N 64 GB 2 rank 4800
4x SK Hynix HMC94AEBRA109N 64 GB 2 rank 4800
7x SK Hynix HMC94AEBRA123N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: RSE105E-1.10
BIOS Date: 05/12/2023
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 13.7

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 13.7

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-30 01:03:38-0400.

Report generated on 2024-01-29 18:02:16 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.