



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

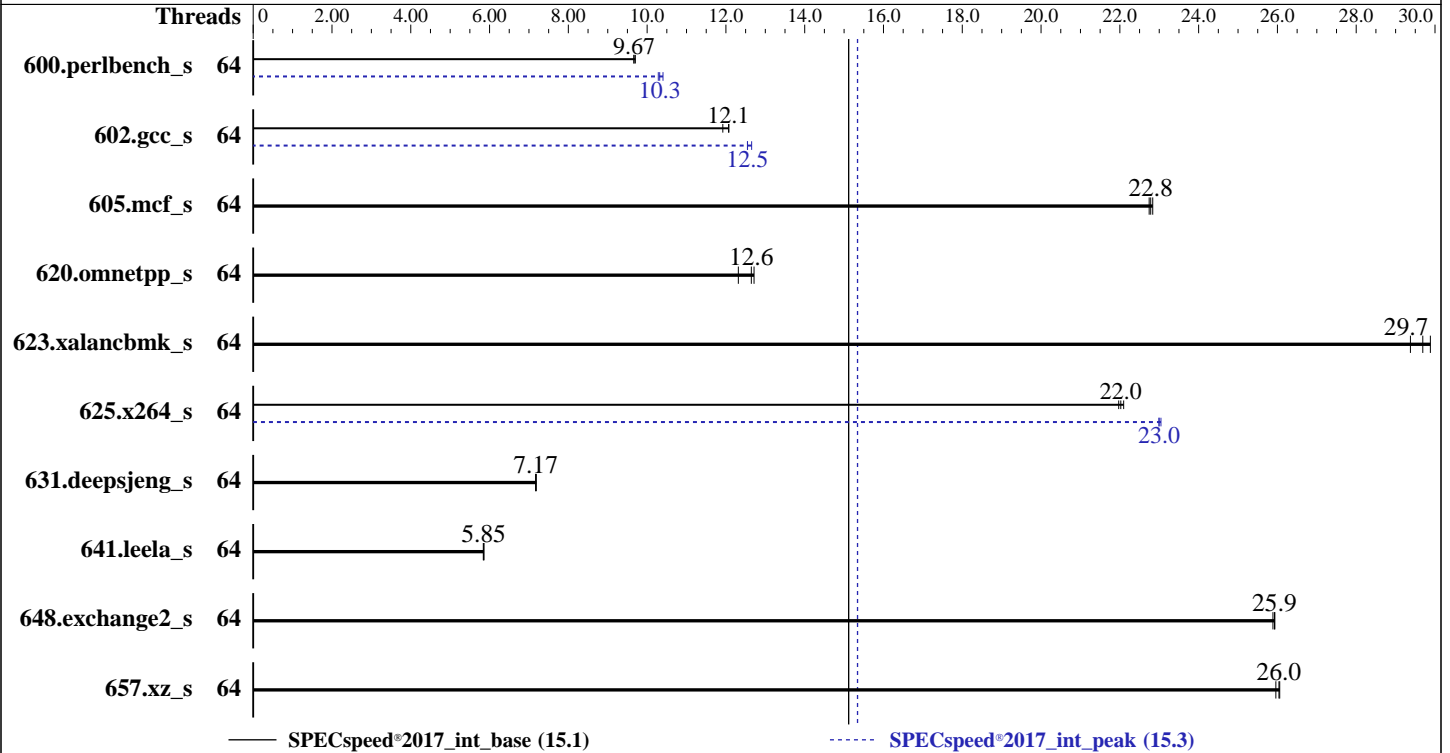

Hardware

CPU Name: Intel Xeon Gold 6438M
 Max MHz: 3900
 Nominal: 2200
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 4.3.1b released Mar-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer power save
 with minimal impact on performance



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|-------------|-------------|-------------|-------------|------------|-------------|---------|------------|-------------|-------------|-------------|-------------|-------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 64 | 184 | 9.66 | 184 | 9.67 | 183 | 9.70 | 64 | 171 | 10.4 | 173 | 10.3 | 172 | 10.3 |
| 602.gcc_s | 64 | 334 | 11.9 | 330 | 12.1 | 330 | 12.1 | 64 | 315 | 12.7 | 317 | 12.5 | 317 | 12.5 |
| 605.mcf_s | 64 | 208 | 22.7 | 207 | 22.8 | 207 | 22.8 | 64 | 208 | 22.7 | 207 | 22.8 | 207 | 22.8 |
| 620.omnetpp_s | 64 | 132 | 12.3 | 129 | 12.6 | 128 | 12.7 | 64 | 132 | 12.3 | 129 | 12.6 | 128 | 12.7 |
| 623.xalancbmk_s | 64 | 48.2 | 29.4 | 47.7 | 29.7 | 47.4 | 29.9 | 64 | 48.2 | 29.4 | 47.7 | 29.7 | 47.4 | 29.9 |
| 625.x264_s | 64 | 80.1 | 22.0 | 80.3 | 22.0 | 79.8 | 22.1 | 64 | 76.6 | 23.0 | 76.7 | 23.0 | 76.7 | 23.0 |
| 631.deepsjeng_s | 64 | 200 | 7.17 | 200 | 7.17 | 199 | 7.19 | 64 | 200 | 7.17 | 200 | 7.17 | 199 | 7.19 |
| 641.leela_s | 64 | 291 | 5.85 | 292 | 5.84 | 291 | 5.86 | 64 | 291 | 5.85 | 292 | 5.84 | 291 | 5.86 |
| 648.exchange2_s | 64 | 114 | 25.9 | 113 | 25.9 | 113 | 25.9 | 64 | 114 | 25.9 | 113 | 25.9 | 113 | 25.9 |
| 657.xz_s | 64 | 238 | 26.0 | 237 | 26.1 | 237 | 26.0 | 64 | 238 | 26.0 | 237 | 26.1 | 237 | 26.0 |

SPECspeed®2017_int_base = **15.1**

SPECspeed®2017_int_peak = **15.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Intel Hyper-Threading Technology set to Disabled

Sub NUMA Clustering set to Disabled

LLC Dead Line set to Disabled

ADDDC Sparing set to Disabled

Processor C6 Report set to Enabled

UPI Link Enablement 1

UPI Power Management Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Aug 10 03:11:22 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

-----
2. w
   03:11:22 up 3 min,  1 user,  load average: 0.03, 0.11, 0.06
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -             03:10   10.00s  1.45s  0.14s  -bash

```

```

-----
3. Username
   From environment variable $USER:  root

```

```

-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 4126945
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes      (-u) 4126945
   virtual memory          (kbytes, -v) unlimited
   file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   -bash
   runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64
     --tune all -o all --define drop_caches intspeed
   runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
     cores=64 --tune all --output_format all --define drop_caches --nopower --runmode speed --tune base:peak
     --size refspeed intspeed --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.034/temlogs/preenv.intspeed.034.0.log --lognum 034.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Gold 6438M
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 143
   stepping       : 8
   microcode      : 0x2b000190
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores      : 32
   siblings       : 32
   2 physical ids (chips)
   64 processors (hardware threads)

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6438M
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 2
Stepping: 8
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpoperntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-31
NUMA node1 CPU(s): 32-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

| | |
|--------------------------------|---|
| Vulnerability Spectre v1: | Mitigation; usercopy/swaps barriers and __user pointer sanitization |
| Vulnerability Spectre v2: | Mitigation; Enhanced IBRS, IBPB conditional, RSB filling |
| Vulnerability Srbds: | Not affected |
| Vulnerability Tsx async abort: | Not affected |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 3M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 2M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 128M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 60M | 120M | 15 | Unified | 3 | 65536 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 515701 MB
node 0 free: 508350 MB
node 1 cpus: 32-63
node 1 size: 516058 MB
node 1 free: 515467 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

9. /proc/meminfo

MemTotal: 1056522352 kB

10. who -r

run-level 3 Aug 10 03:07

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime
                systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
                ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck
                rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd udisks2
indirect       wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=77a2740b-b14c-4767-8283-c21dd185e97d

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 3.90 GHz.
The governor "powersave" may decide which speed to use within this range.

boost state support:

Supported: yes
Active: yes

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

19. Disk information

SPEC is set to: /home/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|-------|------|------|-------|------|------------|
| /dev/sda2 | btrfs | 892G | 13G | 879G | 2% | /home |

20. /sys/devices/virtual/dmi/id

```
Vendor:      Cisco Systems Inc
Product:     UCSC-C220-M7S
Serial:      WZP27020928
```

21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Cisco Systems, Inc.
BIOS Version:     C220M7.4.3.1b.0.0308232129
BIOS Date:        03/08/2023
BIOS Revision:    5.29
```

Compiler Version Notes

```
====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
====
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
====
Fortran | 648.exchange2_s(base, peak)
====
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6438M, 2.20GHz)

SPECspeed®2017_int_base = 15.1

SPECspeed®2017_int_peak = 15.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-10 03:11:21-0400.

Report generated on 2024-01-29 18:06:32 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.