



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Aug-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

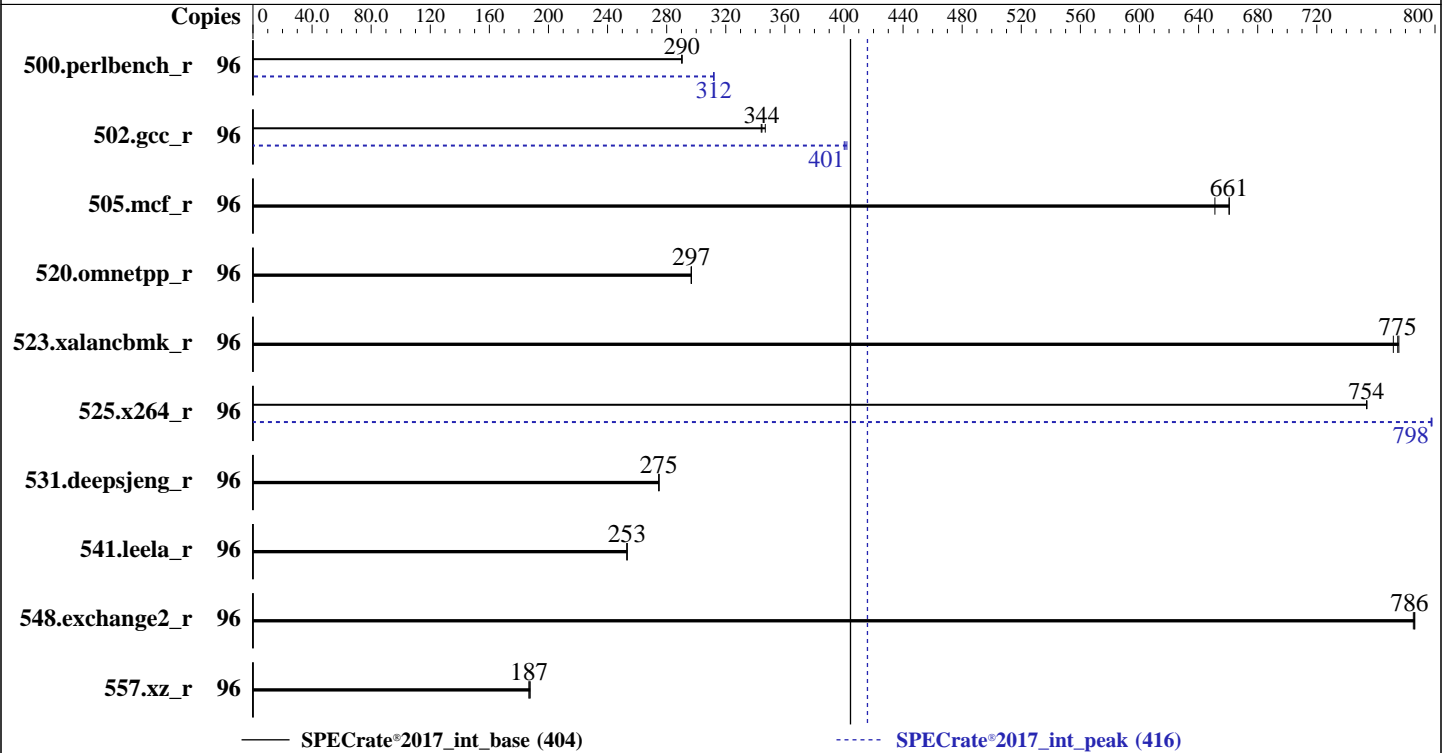

### Hardware

CPU Name: Intel Xeon Gold 5418N  
 Max MHz: 3800  
 Nominal: 1800  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4000)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.00.55 Released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Aug-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	526	290	<b><u>526</u></b>	<b><u>290</u></b>	527	290	96	490	312	490	312	<b><u>490</u></b>	<b><u>312</u></b>
502.gcc_r	96	395	344	392	347	<b><u>395</u></b>	<b><u>344</u></b>	96	<b><u>339</u></b>	<b><u>401</u></b>	338	402	340	400
505.mcf_r	96	<b><u>235</u></b>	<b><u>661</u></b>	235	661	238	651	96	<b><u>235</u></b>	<b><u>661</u></b>	235	661	238	651
520.omnetpp_r	96	424	297	425	297	<b><u>424</u></b>	<b><u>297</u></b>	96	424	297	425	297	<b><u>424</u></b>	<b><u>297</u></b>
523.xalancbmk_r	96	131	776	<b><u>131</u></b>	<b><u>775</u></b>	131	772	96	131	776	<b><u>131</u></b>	<b><u>775</u></b>	131	772
525.x264_r	96	<b><u>223</u></b>	<b><u>754</u></b>	223	754	223	754	96	211	798	211	797	<b><u>211</u></b>	<b><u>798</u></b>
531.deepsjeng_r	96	400	275	<b><u>400</u></b>	<b><u>275</u></b>	400	275	96	400	275	<b><u>400</u></b>	<b><u>275</u></b>	400	275
541.leela_r	96	628	253	628	253	<b><u>628</u></b>	<b><u>253</u></b>	96	628	253	628	253	<b><u>628</u></b>	<b><u>253</u></b>
548.exchange2_r	96	320	786	320	785	<b><u>320</u></b>	<b><u>786</u></b>	96	320	786	320	785	<b><u>320</u></b>	<b><u>786</u></b>
557.xz_r	96	553	188	<b><u>555</u></b>	<b><u>187</u></b>	555	187	96	553	188	<b><u>555</u></b>	<b><u>187</u></b>	555	187

SPECrate®2017\_int\_base = **404**

SPECrate®2017\_int\_peak = **416**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
"/home/spec2017-ic2023/lib/intel64:/home/spec2017-ic2023/lib/ia32:/home/spec2017-ic2023/je5.0.1-32"  
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)  
  
Sysinfo program /home/spec2017-ic2023/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Aug 14 08:26:24 2023  
  
SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 250 (250-6.el9\_0)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. tuned-adm active
  17. sysctl
  18. /sys/kernel/mm/transparent\_hugepage
  19. /sys/kernel/mm/transparent\_hugepage/khugepaged
  20. OS release
  21. Disk information
  22. /sys/devices/virtual/dmi/id
  23. dmidecode
  24. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

- ```

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
08:26:24 up 1 min, 2 users, load average: 0.34, 0.26, 0.10
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root     tty1      08:25    1:04   1.37s  0.03s  -bash
root     pts/0    08:25    0.00s  0.05s  0.05s  -bash

3. Username
From environment variable $USER:  root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2060198
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2060198
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 96 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define
smt-on --define cores=48 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base,peak --iterations 3 -o all intrate
runcpu --define default-platform-flags --copies 96 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --iterations 3 --output_format all
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.201/temlogs/preenv.intrate.201.0.log --lognum 201.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2017-ic2023

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 5418N
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 7

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
microcode      : 0x2b000111
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 5418N
BIOS Model name:       Intel(R) Xeon(R) Gold 5418N
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):             2
Stepping:              7
BogoMIPS:              3600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_l1d arch_capabilities

Virtualization:        VT-x
L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              90 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-11,48-59
NUMA node1 CPU(s):    12-23,60-71
NUMA node2 CPU(s):    24-35,72-83
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node3 CPU(s):          36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 2.3M     | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 1.5M     | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 2M       | 96M      | 16   | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 45M      | 90M      | 15   | Unified     | 3     | 49152 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 128080 MB
node 0 free: 125524 MB
node 1 cpus: 12-23,60-71
node 1 size: 129018 MB
node 1 free: 128513 MB
node 2 cpus: 24-35,72-83
node 2 size: 128982 MB
node 2 free: 128572 MB
node 3 cpus: 36-47,84-95
node 3 size: 129007 MB
node 3 free: 125427 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527451460 kB

10. who -r

run-level 3 Aug 14 08:24

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

13. Services, from `systemctl list-unit-files`

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond<br>dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode<br>nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd sysstat<br>systemd-network-generator tuned udisks2 upower                                                                                                                     |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                                                                                                                                   |
| disabled        | arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown<br>canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat<br>man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild<br>serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex<br>indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo |

14. Linux kernel boot-time arguments, from `/proc/cmdline`

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

15. `cpupower frequency-info`

```

analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

16. `tuned-adm active`

Current active profile: throughput-performance

17. `sysctl`

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

18. `/sys/kernel/mm/transparent_hugepage`

defrag always defer defer+madvice [madvice] never

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
enabled [always] madwise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
-----
```

```
-----
20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
-----
```

```
-----
21. Disk information
SPEC is set to: /home/spec2017-ic2023
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.7T 80G 1.6T 5% /home
-----
```

```
-----
22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 2288H V7
Product Family: Eagle Stream
Serial: serial
-----
```

```
-----
23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4000
-----
```

```
-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 2.00.55
BIOS Date: 03/07/2023
BIOS Revision: 0.55
-----
```

### Compiler Version Notes

```
=====
C | 502.gcc_r(peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Compiler Version Notes (Continued)

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Aug-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalanchbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:  
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmallo

C++ benchmarks:  
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmallo

Fortran benchmarks:  
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmallo

## Peak Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 404

FusionServer 2288H V7 (Intel Xeon Gold 5418N)

SPECrate®2017\_int\_peak = 416

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Aug-2023

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-14 08:26:24-0400.

Report generated on 2024-01-29 18:07:14 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.