



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Aug-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

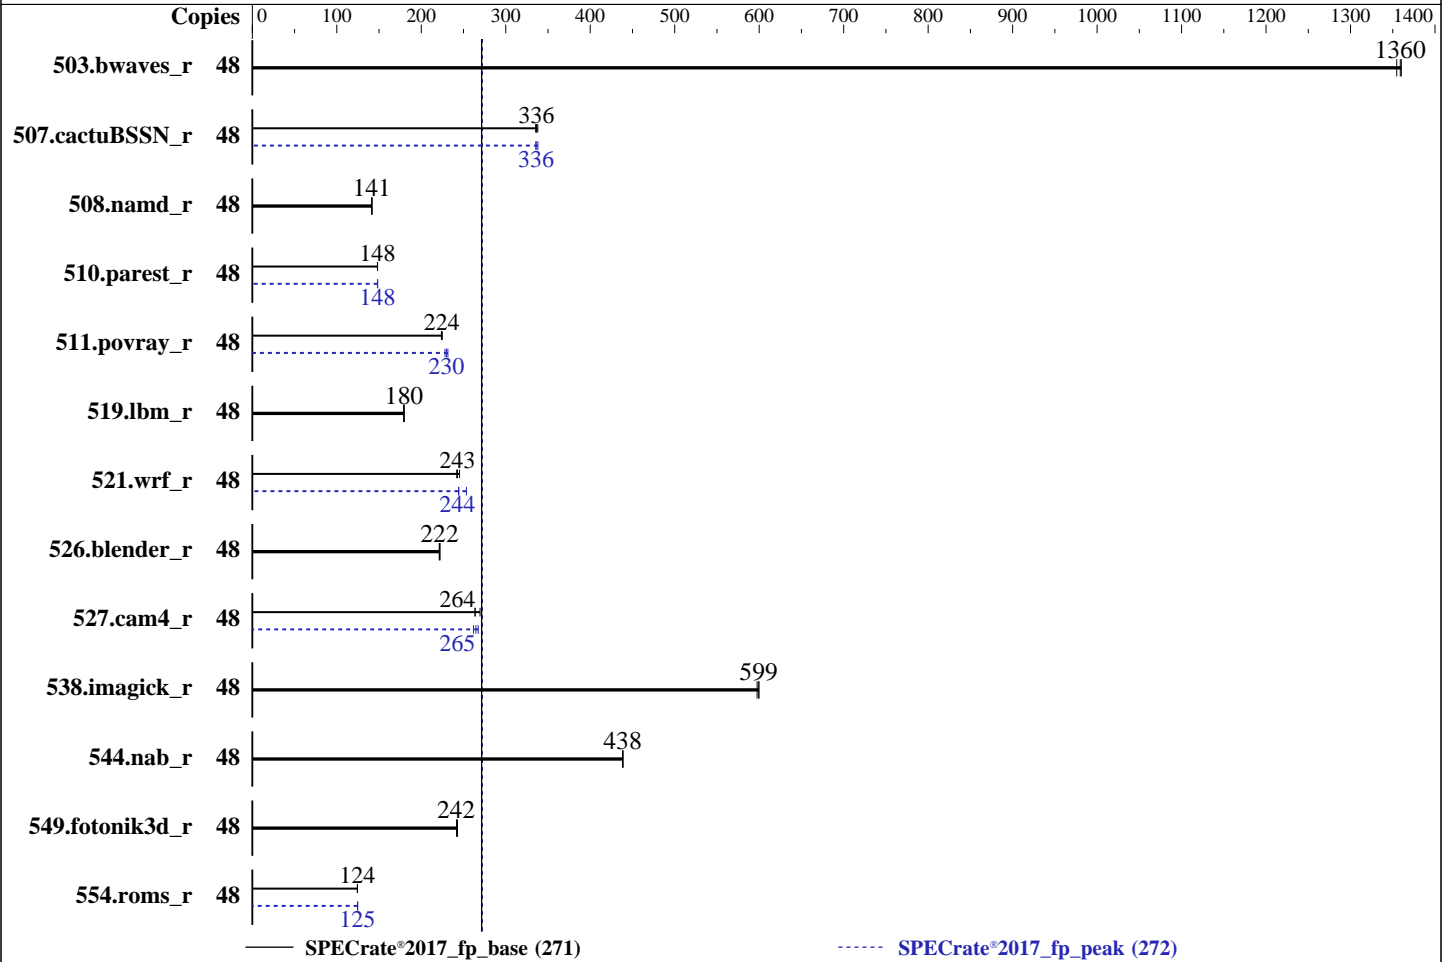

Hardware

CPU Name: Intel Xeon Gold 5411N
 Max MHz: 3900
 Nominal: 1900
 Enabled: 24 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
 Storage: 1 x 1920 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 2.00.55 Released Mar-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	355	1350	<u>354</u>	<u>1360</u>	354	1360	48	355	1350	<u>354</u>	<u>1360</u>	354	1360
507.cactuBSSN_r	48	<u>181</u>	<u>336</u>	181	335	180	338	48	181	336	180	338	<u>181</u>	<u>336</u>
508.namd_r	48	322	141	<u>322</u>	<u>141</u>	322	142	48	322	141	<u>322</u>	<u>141</u>	322	142
510.parest_r	48	848	148	847	148	<u>847</u>	<u>148</u>	48	846	148	848	148	<u>847</u>	<u>148</u>
511.povray_r	48	499	225	501	224	<u>500</u>	<u>224</u>	48	491	228	484	232	<u>487</u>	<u>230</u>
519.lbm_r	48	282	179	282	180	<u>282</u>	<u>180</u>	48	282	179	282	180	<u>282</u>	<u>180</u>
521.wrf_r	48	444	242	438	245	<u>443</u>	<u>243</u>	48	440	244	<u>440</u>	<u>244</u>	424	253
526.blender_r	48	330	221	329	222	<u>330</u>	<u>222</u>	48	330	221	329	222	<u>330</u>	<u>222</u>
527.cam4_r	48	311	270	<u>318</u>	<u>264</u>	318	264	48	314	267	<u>317</u>	<u>265</u>	321	262
538.imagick_r	48	<u>199</u>	<u>599</u>	200	598	199	600	48	<u>199</u>	<u>599</u>	200	598	199	600
544.nab_r	48	184	438	<u>184</u>	<u>438</u>	184	439	48	184	438	<u>184</u>	<u>438</u>	184	439
549.fotonik3d_r	48	770	243	773	242	<u>773</u>	<u>242</u>	48	770	243	773	242	<u>773</u>	<u>242</u>
554.roms_r	48	613	124	613	124	<u>613</u>	<u>124</u>	48	612	125	<u>612</u>	<u>125</u>	613	125

SPECrate®2017_fp_base = 271

SPECrate®2017_fp_peak = 272

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2017-1.1.9-ic2023/lib/intel64:/home/spec2017-1.1.9-ic2023/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/spec2017-1.1.9-ic2023/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Aug 16 21:55:34 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
21:55:34 up 6:01, 1 user, load average: 11.49, 35.85, 43.35
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 15:55 5:59m 1.23s 0.03s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
3. Username
   From environment variable $USER:  root

-----
4. ulimit -a
   real-time non-blocking time (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size                (kbytes, -d) unlimited
   scheduling priority          (-e) 0
   file size                    (blocks, -f) unlimited
   pending signals              (-i) 1028048
   max locked memory            (kbytes, -l) 64
   max memory size              (kbytes, -m) unlimited
   open files                   (-n) 1024
   pipe size                    (512 bytes, -p) 8
   POSIX message queues        (bytes, -q) 819200
   real-time priority          (-r) 0
   stack size                   (kbytes, -s) unlimited
   cpu time                     (seconds, -t) unlimited
   max user processes          (-u) 1028048
   virtual memory               (kbytes, -v) unlimited
   file locks                   (-x) unlimited

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   -bash
   runcpu --define default-platform-flags --copies 48 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define
   smt-on --define cores=24 --define physicalfirst --define invoke_with_interleave --define drop_caches
   --tune base,peak --iterations 3 -o all fprate
   runcpu --define default-platform-flags --copies 48 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=24 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --iterations 3 --output_format all
   --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.222/temlogs/preenv.fprate.222.0.log --lognum 222.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/spec2017-1.1.9-ic2023

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Gold 5411N
   vendor_id      : GenuineIntel
   cpu family      : 6
   model           : 143
   stepping        : 7
   microcode       : 0x2b000111
   bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores       : 24
   siblings        : 48
   1 physical ids (chips)
   48 processors (hardware threads)
   physical id 0: core ids 0-23
   physical id 0: apicids 0-47
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 5411N
BIOS Model name:       Intel(R) Xeon(R) Gold 5411N
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              1
Stepping:               7
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtsc3
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        flush_l1d arch_capabilities

```

```

Virtualization:        VT-x
L1d cache:             1.1 MiB (24 instances)
L1i cache:             768 KiB (24 instances)
L2 cache:              48 MiB (24 instances)
L3 cache:              45 MiB (1 instance)
NUMA node(s):          2
NUMA node0 CPU(s):    0-11,24-35
NUMA node1 CPU(s):    12-23,36-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

L2	2M	48M	16 Unified	2	2048	1	64
L3	45M	45M	15 Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 128044 MB
node 0 free: 113599 MB
node 1 cpus: 12-23,36-47
node 1 size: 129007 MB
node 1 free: 118179 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

9. /proc/meminfo

MemTotal: 263221376 kB

10. who -r

run-level 3 Aug 16 15:54

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd sysstat systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell firewalld kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
indirect	

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
15. cpupower frequency-info
    analyzing CPU 0:
        Unable to determine current policy
    boost state support:
        Supported: yes
        Active: yes
-----

16. tuned-adm active
    Current active profile: throughput-performance
-----

17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----

18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----

20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
-----

21. Disk information

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

SPEC is set to: /home/spec2017-1.1.9-ic2023

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.7T	110G	1.6T	7%	/home

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:      XFUSION
Product:     5288 V7
Product Family: Eagle Stream
Serial:      serial
-----

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400
-----

```

```

-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      XFUSION
  BIOS Version:     2.00.55
  BIOS Date:        03/07/2023
  BIOS Revision:    0.55
-----

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Portability Flags (Continued)

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 5288 V7 (Intel Xeon Gold 5411N)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Aug-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

`-L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-16 09:55:33-0400.

Report generated on 2023-09-13 14:50:32 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.