



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro


A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Aug-2023  
Hardware Availability: Sep-2023  
Software Availability: Aug-2023

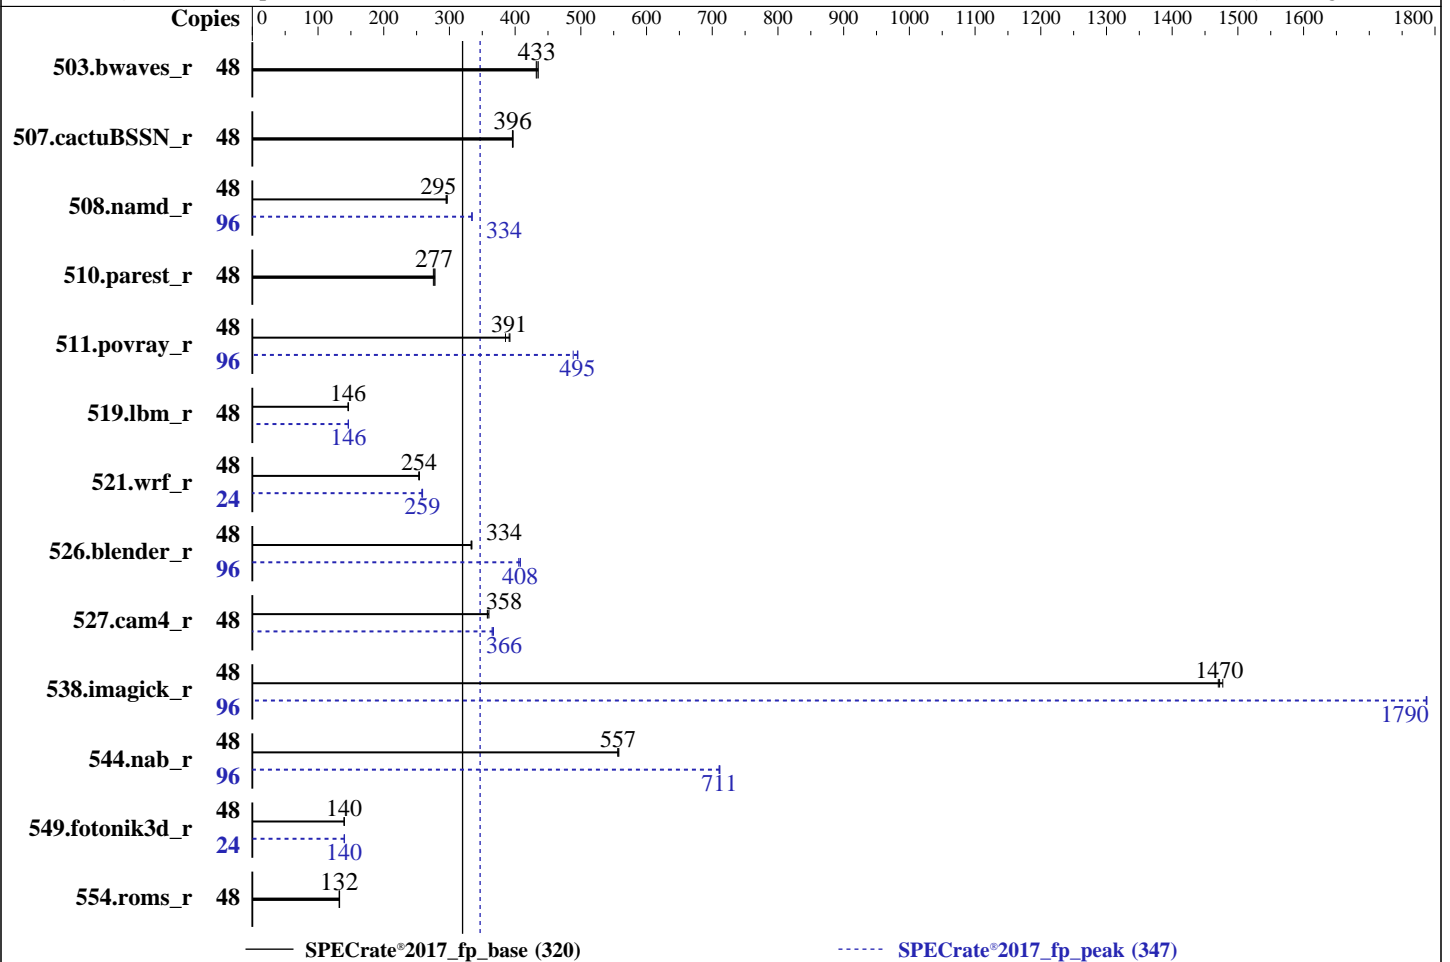

### Hardware

CPU Name: AMD EPYC 8434P  
Max MHz: 3100  
Nominal: 2500  
Enabled: 48 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 128 MB I+D on chip per chip, 16 MB shared / 6 cores  
Other: None  
Memory: 384 GB (6 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 3.8 TB M.2 NVMe SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
Kernel 5.14.21-150400.24.74-default  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: No  
Firmware: Version 1.0 released Sep-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Aug-2023  
Hardware Availability: Sep-2023  
Software Availability: Aug-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1114	432	1106	435	<u>1111</u>	<u>433</u>	48	1114	432	1106	435	<u>1111</u>	<u>433</u>
507.cactuBSSN_r	48	153	397	154	396	<u>153</u>	<u>396</u>	48	153	397	154	396	<u>153</u>	<u>396</u>
508.namd_r	48	<u>154</u>	<u>295</u>	154	297	155	295	96	<u>273</u>	<u>334</u>	273	334	273	334
510.parest_r	48	<u>453</u>	<u>277</u>	452	278	456	276	48	<u>453</u>	<u>277</u>	452	278	456	276
511.povray_r	48	291	385	<u>287</u>	<u>391</u>	286	392	96	<u>453</u>	<u>495</u>	452	496	459	488
519.lbm_r	48	346	146	347	146	<u>347</u>	<u>146</u>	48	346	146	347	146	<u>346</u>	<u>146</u>
521.wrf_r	48	423	254	424	253	<u>423</u>	<u>254</u>	24	208	258	207	259	<u>208</u>	<u>259</u>
526.blender_r	48	220	333	219	334	<u>219</u>	<u>334</u>	96	358	408	<u>359</u>	<u>408</u>	361	405
527.cam4_r	48	235	358	<u>234</u>	<u>358</u>	233	360	48	<u>229</u>	<u>366</u>	230	365	229	367
538.imagick_r	48	<u>81.1</u>	<u>1470</u>	80.8	1480	81.2	1470	96	<u>134</u>	<u>1790</u>	134	1790	134	1790
544.nab_r	48	145	556	145	558	<u>145</u>	<u>557</u>	96	227	711	227	712	<u>227</u>	<u>711</u>
549.fotonik3d_r	48	1337	140	1338	140	<u>1338</u>	<u>140</u>	24	669	140	667	140	<u>668</u>	<u>140</u>
554.roms_r	48	<u>576</u>	<u>132</u>	577	132	574	133	48	<u>576</u>	<u>132</u>	577	132	574	133

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/dexterb/spec-cpu2017-A1.1/amd\_rate\_aocc400\_znver4\_A\_lib/lib:/home/dexterb/spec-cpu2017-A1.1/amd\_rate\_aocc400\_znver4\_A\_lib/lib32:"  
MALLOCONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:  
Determinism Control = Manual  
Determinism Enable = Disable Performance Determinism  
cTDP Control = Manual  
cTDP = 225  
Package Power Limit Control = Manual  
Package Power Limit = 225

Sysinfo program /home/dexterb/spec-cpu2017-A1.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on 168-110 Tue Aug 22 17:31:50 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.173.g6441bb4114)
12. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

### Platform Notes (Continued)

- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux 168-110 5.14.21-150400.24.74-default #1 SMP PREEMPT_DYNAMIC Thu Jul 27 15:04:26 UTC 2023 (28a2488)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
17:31:50 up 6:40, 1 user, load average: 66.60, 88.89, 92.93
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 10:58 6:31m 1.87s 0.41s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1544342
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1544342
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/dexterb/spec-cpu2017-A1.1
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

### Platform Notes (Continued)

6. /proc/cpuinfo

```

model name      : AMD EPYC 8434P 48-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa0020f
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores      : 48
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 8434P 48-Core Processor
CPU family:            25
Model:                 160
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):              1
Stepping:              2
Frequency boost:       enabled
CPU max MHz:           2500.0000
CPU min MHz:           1500.0000
BogoMIPS:              4992.01
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             1.5 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

### Platform Notes (Continued)

```

L2 cache:                48 MiB (48 instances)
L3 cache:                128 MiB (8 instances)
NUMA node(s):            1
NUMA node0 CPU(s):      0-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                          filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-95
node 0 size: 386115 MB
node 0 free: 384736 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 395382128 kB

10. who -r

run-level 3 Aug 22 10:51

11. Systemd service manager version: systemd 249 (249.16+suse.173.g6441bb4114)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd
nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm
grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpcbind

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

### Platform Notes (Continued)

```
rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2
indirect wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.24.74-default
root=UUID=89e224e2-94dc-43a8-8cb1-0fd0b5a2aa63
splash=silent
resume=/dev/disk/by-uuid/2dfe6e9a-6fcf-4e8c-8483-10af06679f16
mitigations=auto
quiet
security=apparmor
crashkernel=268M,high
crashkernel=72M,low
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.50 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

### Platform Notes (Continued)

```
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

-----  
19. Disk information  
SPEC is set to: /home/dexterb/spec-cpu2017-A1.1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p3 xfs 3.1T 6.3G 3.1T 1% /home

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Supermicro  
Product: Super Server  
Product Family: SMC H13  
Serial: 123456789

-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
6x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.0  
BIOS Date: 08/11/2023  
BIOS Revision: 5.30

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

### Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mlvm -unroll-threshold=50 -mlvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mlvm -reduce-array-computations=3
-zopt -mlvm -unroll-threshold=100 -finline-aggressive
-mlvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mlvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

## Peak Optimization Flags (Continued)

508.namd\_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc
```

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-lflang
```

```
527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-Kieee -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Aug-2023

## Peak Optimization Flags (Continued)

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

```
526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
-lamdalloc
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8434P)

SPECrate®2017\_fp\_base = 320

SPECrate®2017\_fp\_peak = 347

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Aug-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Siena-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Siena-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-22 20:31:49-0400.

Report generated on 2023-09-18 11:40:20 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-18.