



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-212)
(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

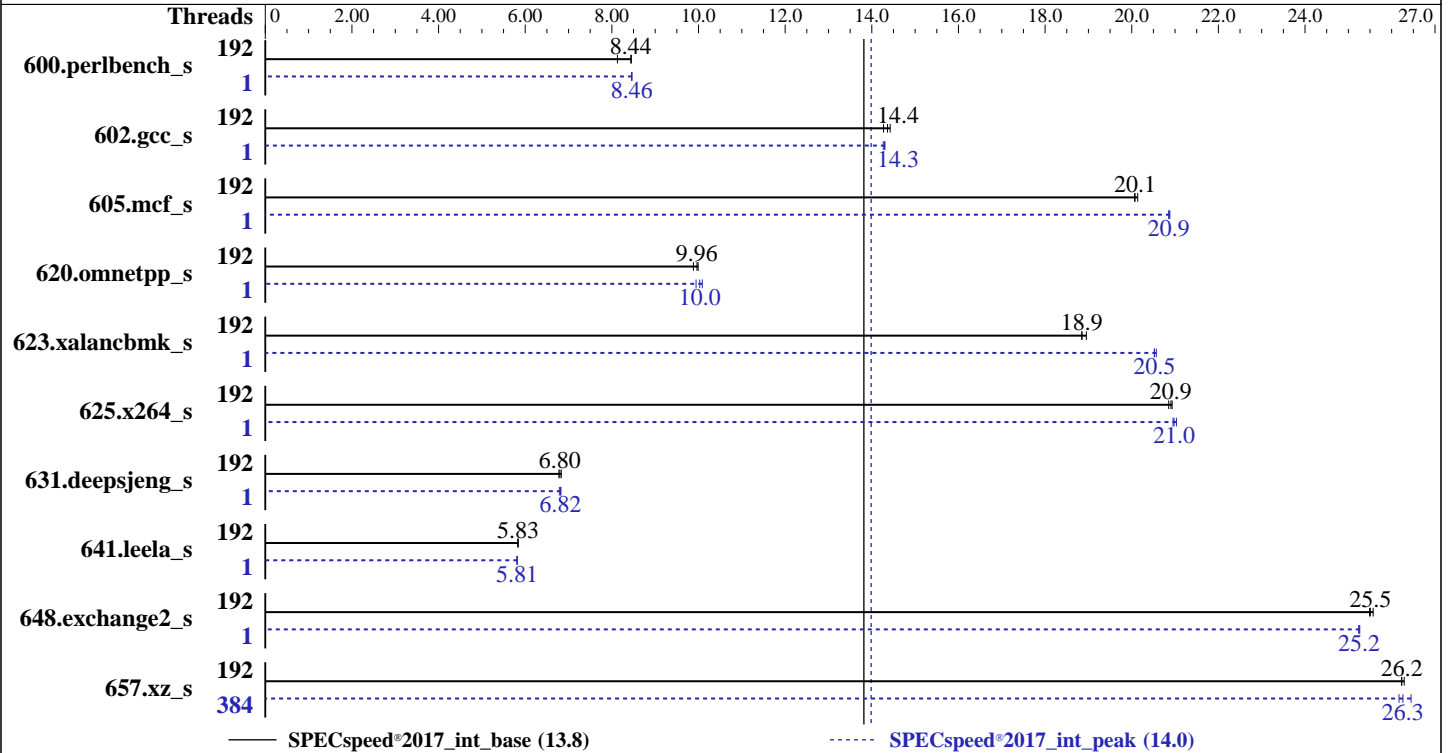

Hardware

CPU Name: AMD EPYC 9654
 Max MHz: 3700
 Nominal: 2400
 Enabled: 192 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1472 GB (23 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB NVMe
 Other: None

Software

OS: Ubuntu 20.04.4 LTS
 kernel version 5.15.0-84-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.4 released Apr-2023
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: none
 Power Management: OS is set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)

(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	210	8.45	<u>210</u>	<u>8.44</u>	218	8.13	1	210	8.46	<u>210</u>	<u>8.46</u>	210	8.46
602.gcc_s	192	276	14.4	<u>277</u>	<u>14.4</u>	279	14.3	1	278	14.3	<u>279</u>	<u>14.3</u>	279	14.3
605.mcf_s	192	<u>235</u>	<u>20.1</u>	234	20.1	235	20.1	1	226	20.9	<u>226</u>	<u>20.9</u>	226	20.9
620.omnetpp_s	192	<u>164</u>	<u>9.96</u>	165	9.88	163	9.99	1	162	10.1	<u>163</u>	<u>10.0</u>	164	9.94
623.xalancbmk_s	192	74.8	19.0	75.2	18.8	<u>75.2</u>	<u>18.9</u>	1	69.1	20.5	<u>69.0</u>	<u>20.5</u>	68.9	20.6
625.x264_s	192	84.3	20.9	84.6	20.9	<u>84.4</u>	<u>20.9</u>	1	<u>84.1</u>	<u>21.0</u>	83.9	21.0	84.2	21.0
631.deepsjeng_s	192	<u>211</u>	<u>6.80</u>	210	6.83	211	6.78	1	211	6.79	210	6.82	<u>210</u>	<u>6.82</u>
641.leela_s	192	<u>292</u>	<u>5.83</u>	292	5.83	293	5.83	1	<u>293</u>	<u>5.81</u>	293	5.82	294	5.81
648.exchange2_s	192	<u>115</u>	<u>25.5</u>	115	25.6	115	25.5	1	<u>116</u>	<u>25.2</u>	116	25.2	116	25.3
657.xz_s	192	236	26.2	<u>236</u>	<u>26.2</u>	235	26.3	384	<u>235</u>	<u>26.3</u>	236	26.2	234	26.4

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)

(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "384"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 648.exchange2_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-383"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:
cTDP: 360

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)

(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

Platform Notes (Continued)

Determinism Slider set to Power

Package Power: 360

EDC: 400

ACPI SRAT L3 Cache as NUMA Domain: enabled

Memory interleaving: Disabled

4-link xGMI max speed: 16Gbps

Fan Speed: Maximum

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd2-Super-Server Fri Sep 29 10:02:21 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux amd2-Super-Server 5.15.0-84-generic #93~20.04.1-Ubuntu SMP Wed Sep 6 16:15:40 UTC 2023 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
10:02:21 up 1 day, 17:10, 2 users, load average: 0.15, 0.05, 0.01
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
amd2  tty2    -             Wed16   21.00s  1.72s  0.05s -bash
amd2  tty3    -             Thu18   15:05m  0.05s  0.03s -bash
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      amd2
```

```
4. ulimit -a
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-212)
(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2023
Hardware Availability: Jun-2023
Software Availability: Sep-2023

Platform Notes (Continued)

time(seconds)	unlimited
file(blocks)	unlimited
data(kbytes)	unlimited
stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	2097152
process	5932677
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

```
-----
5. sysinfo process ancestry
/sbin/init splash
/bin/login -p --
-bash
sudo su
su
bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
-----
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 96
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

```
-----
7. lscpu

From lscpu from util-linux 2.34:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          52 bits physical, 57 bits virtual
CPU(s):                 384
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)

(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

Platform Notes (Continued)

```

On-line CPU(s) list:          0-383
Thread(s) per core:         2
Core(s) per socket:         96
Socket(s):                   2
NUMA node(s):               2
Vendor ID:                   AuthenticAMD
CPU family:                  25
Model:                       17
Model name:                  AMD EPYC 9654 96-Core Processor
Stepping:                    1
Frequency boost:             enabled
CPU MHz:                     1500.000
CPU max MHz:                 3707.8120
CPU min MHz:                 1500.0000
BogoMIPS:                    4799.74
Virtualization:             AMD-V
L1d cache:                   6 MiB
L1i cache:                   6 MiB
L2 cache:                    192 MiB
L3 cache:                    768 MiB
NUMA node0 CPU(s):          0-95,192-287
NUMA node1 CPU(s):          96-191,288-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSE-eIBRS Not affected

Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected
Flags:                      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                             lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                             rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                             movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                             cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                             topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                             cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                             fsgsbase bmlil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                             rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                             avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                             cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                             wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                             vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                             v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                             gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                             rdpid overflow_recov succor smca fsrm flush_l1d

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	6M	8	Data	1
L1i	32K	6M	8	Instruction	1
L2	1M	192M	8	Unified	2
L3	32M	768M	16	Unified	3

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-212)
(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2023
Hardware Availability: Jun-2023
Software Availability: Sep-2023

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-95,192-287
node 0 size: 709209 MB
node 0 free: 705277 MB
node 1 cpus: 96-191,288-383
node 1 size: 774035 MB
node 1 free: 768947 MB
node distances:
node 0 1
0: 10 32
1: 32 10
```

9. /proc/meminfo

```
MemTotal: 1518842524 kB
```

10. who -r

```
run-level 5 Sep 26 16:41
```

11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)

```
Default Target Status
graphical degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT LOAD ACTIVE SUB DESCRIPTION
* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
```

13. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn
pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog
systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw
unattended-upgrades whoopsie wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled acpid brltty console-getty debug-shell openvpn-client@ openvpn-server@ openvpn@
rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-networkd
systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@
wpa_supplicant-wired@ wpa_supplicant@
generated apport
indirect display-manager lightdm saned@ spice-vdagent spice-vdagentd uidd
masked alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
sudo x11-common
```

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.15.0-84-generic
root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57
ro
quiet
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-212)
(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

Platform Notes (Continued)

splash
vt.handoff=7

```

15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 20.04.4 LTS

```

```

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme1n1p2 ext4  938G   19G  872G   3% /

```

```

20. /sys/devices/virtual/dmi/id
Vendor:      Tyrone Systems
Product:     Tyrone Camarero SDA200A2N-212
Product Family: SMC H13
Serial:      A509935X3906531

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
 (Test Sponsor: Netweb Pte Ltd)
 (Tyrone Camarero SDA200A2N-212)
 (2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8
 SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2023
Hardware Availability: Jun-2023
Software Availability: Sep-2023

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x NO DIMM NO DIMM
 23x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
 BIOS Version: 1.4
 BIOS Date: 04/19/2023
 BIOS Revision: 5.27

Compiler Version Notes

```
=====  

C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  

      | 657.xz_s(base, peak)  

=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  

Target: x86_64-unknown-linux-gnu  

Thread model: posix  

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  

=====
```

```
=====  

C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  

      | 641.leela_s(base, peak)  

=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  

Target: x86_64-unknown-linux-gnu  

Thread model: posix  

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  

=====
```

```
=====  

Fortran | 648.exchange2_s(base, peak)  

=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  

Target: x86_64-unknown-linux-gnu  

Thread model: posix  

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  

=====
```

Base Compiler Invocation

C benchmarks:
 clang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)

(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-212)
(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2023
Hardware Availability: Jun-2023
Software Availability: Sep-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)

(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
 (Test Sponsor: Netweb Pte Ltd)
 (Tyrone Camarero SDA200A2N-212)
 (2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_int_base = 13.8

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2023
Hardware Availability: Jun-2023
Software Availability: Sep-2023

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
 -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
 -flto -finline-aggressive -mllvm -unroll-threshold=100
 -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
 -fvirtual-function-elimination -fvisibility=hidden
 -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
 -Wl,-mllvm -Wl,-reduce-array-computations=3
 -Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
 -Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
 -ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
 -mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
 -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.xml>



SPEC CPU[®]2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)

(2.4 GHz, AMD EPYC 9654)

SPECspeed[®]2017_int_base = 13.8

SPECspeed[®]2017_int_peak = 14.0

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Sep-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.9 on 2023-09-29 00:32:21-0400.

Report generated on 2023-10-25 10:34:09 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.