



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 407

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

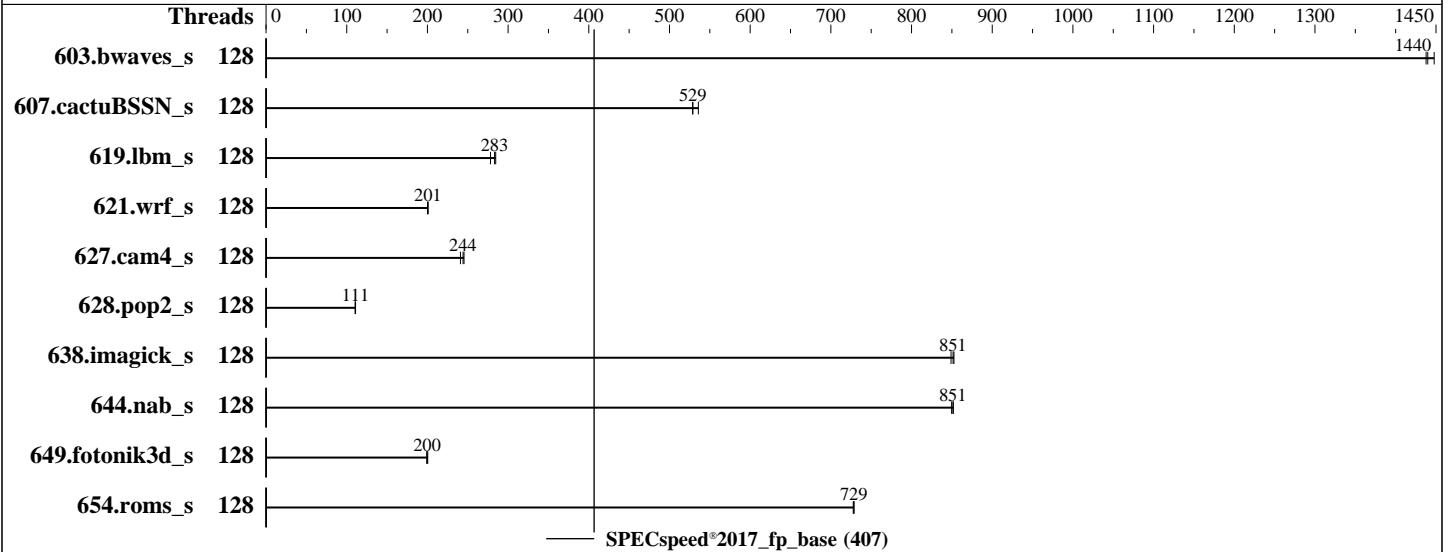

Hardware

CPU Name: Intel Xeon Platinum 8592+
 Max MHz: 3900
 Nominal: 1900
 Enabled: 128 cores, 2 chips
 Orderable: 2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version USE125B 4.10 released Nov-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 407

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	41.0	1440	41.0	1440	40.8	1450							
607.cactuBSSN_s	128	31.1	536	31.5	529	31.5	529							
619.lbm_s	128	18.4	285	18.8	278	18.5	283							
621.wrf_s	128	65.9	201	65.9	201	66.0	200							
627.cam4_s	128	36.8	241	36.1	245	36.3	244							
628.pop2_s	128	107	111	108	110	107	111							
638.imagick_s	128	17.0	849	16.9	851	16.9	853							
644.nab_s	128	20.6	850	20.5	852	20.5	851							
649.fotonik3d_s	128	45.7	200	45.8	199	45.5	200							
654.roms_s	128	21.6	729	21.6	728	21.6	729							

SPECspeed®2017_fp_base = 407

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.2/lib/intel64:/home/cpu2017-1.1.9-ic2023.2/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 407

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

Hyper-Threading set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Nov 20 14:57:58 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
14:57:58 up 1:42, 1 user, load average: 0.00, 0.00, 3.07
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 13:17 14.00s 0.84s 0.00s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126879

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 407

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```

max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 4126879
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2-lin-core-avx512-speed-20230622.cfg --define cores=128 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2-lin-core-avx512-speed-20230622.cfg --define cores=128 --tune base --output_format all --define
  drop_caches --nopower --runmode speed --tune base --size refspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.140/templogs/preenv.fpspeed.140.0.log --lognum 140.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2

```

6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000190
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 64
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246,248,250,252,254
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 407

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```

Address sizes:          46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) PLATINUM 8592+
CPU family:            6
Model:                 207
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):             2
Stepping:              2
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                    arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-63
NUMA node1 CPU(s):    64-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                    sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_base = 407

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Feb-2024
Software Availability: Jun-2023

Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-63
node 0 size: 515708 MB
node 0 free: 513478 MB
node 1 cpus: 64-127
node 1 size: 516040 MB
node 1 free: 514392 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10
```

9. /proc/meminfo
MemTotal: 1056511916 kB

10. who -r
run-level 3 Nov 20 13:16

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=f9160d4b-3dba-4b09-a5d2-6264cd10a97f
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_base = 407

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Jun-2023

Platform Notes (Continued)

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise High Performance Computing 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   893G  35G  859G  4% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:         Lenovo
Product:        ThinkSystem SD650 V3
Product Family: ThinkSystem
Serial:         9999999999

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_base = 407

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Feb-2024
Software Availability: Jun-2023

Platform Notes (Continued)

"DMTF SMBIOS" standard.

Memory:

14x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600
2x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: USE125B-4.10
BIOS Date: 11/02/2023
BIOS Revision: 4.10
Firmware Revision: 0.30

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 407

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_base = 407

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Jun-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-20 01:57:57-0500.

Report generated on 2024-01-03 16:15:35 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-14.