



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion


FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

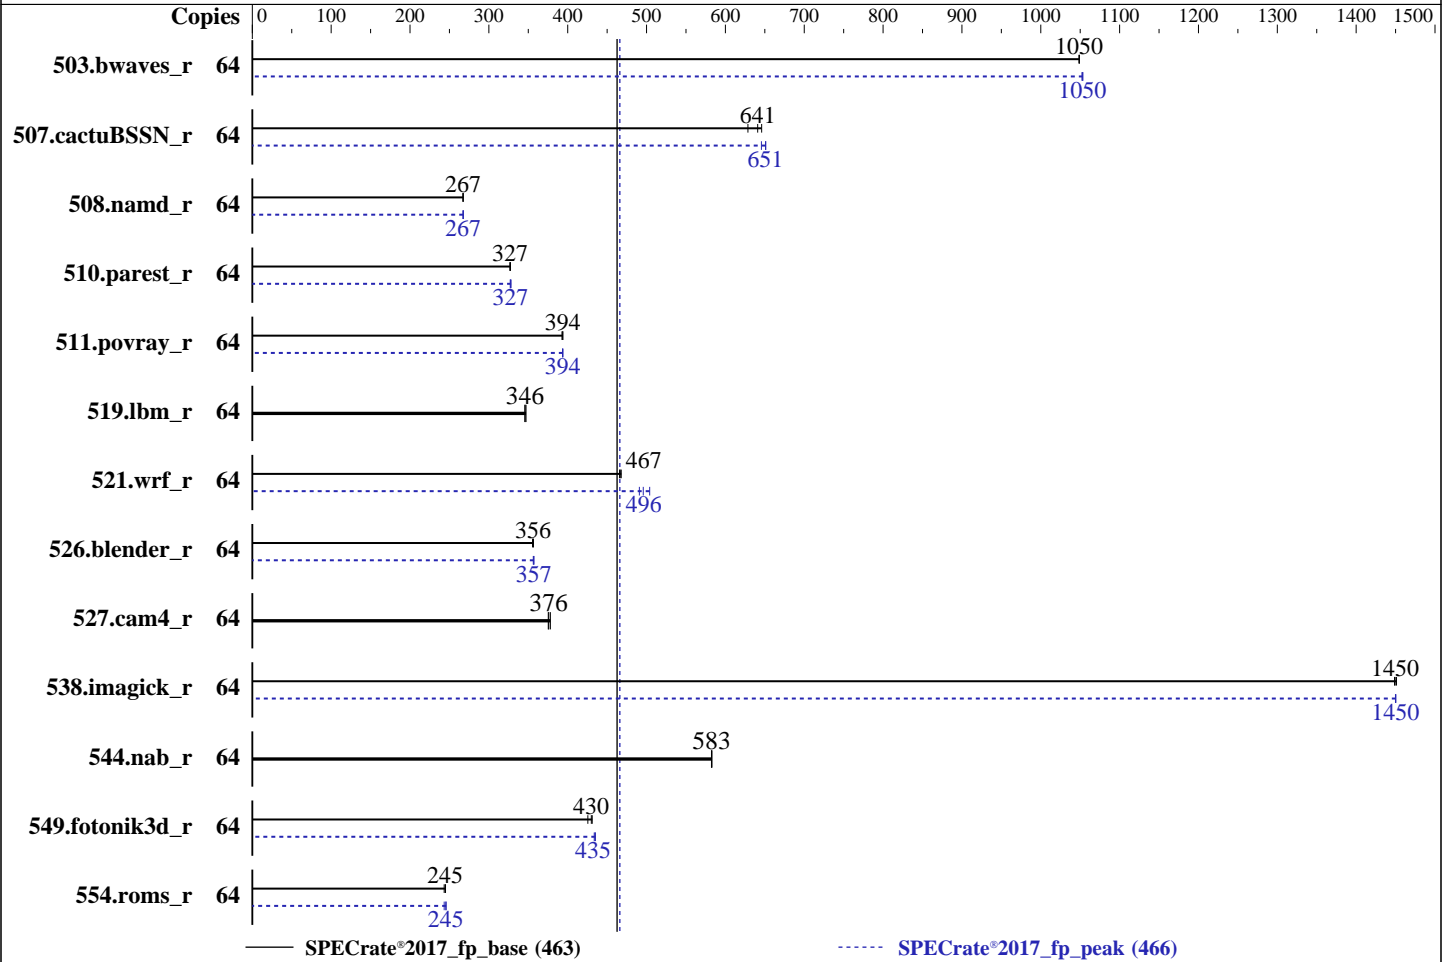

Hardware

CPU Name: AMD EPYC 9124
 Max MHz: 3700
 Nominal: 3000
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.06.29 released Nov-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	612	1050	<u>612</u>	<u>1050</u>	612	1050	64	610	1050	<u>609</u>	<u>1050</u>	609	1050
507.cactuBSSN_r	64	125	646	129	629	<u>126</u>	<u>641</u>	64	<u>124</u>	<u>651</u>	125	646	124	651
508.namd_r	64	228	267	227	267	<u>227</u>	<u>267</u>	64	227	267	227	267	<u>227</u>	<u>267</u>
510.parest_r	64	512	327	512	327	<u>512</u>	<u>327</u>	64	512	327	<u>512</u>	<u>327</u>	510	328
511.povray_r	64	381	393	<u>380</u>	<u>394</u>	380	394	64	379	394	380	393	<u>380</u>	<u>394</u>
519.lbm_r	64	<u>195</u>	<u>346</u>	194	347	195	346	64	<u>195</u>	<u>346</u>	194	347	195	346
521.wrf_r	64	306	468	<u>307</u>	<u>467</u>	308	466	64	<u>289</u>	<u>496</u>	292	491	284	504
526.blender_r	64	274	355	<u>274</u>	<u>356</u>	273	357	64	<u>273</u>	<u>357</u>	274	356	273	357
527.cam4_r	64	296	378	<u>298</u>	<u>376</u>	298	375	64	296	378	<u>298</u>	<u>376</u>	298	375
538.imagick_r	64	110	1450	110	1450	<u>110</u>	<u>1450</u>	64	<u>110</u>	<u>1450</u>	110	1450	110	1450
544.nab_r	64	<u>185</u>	<u>583</u>	185	583	185	582	64	<u>185</u>	<u>583</u>	185	583	185	582
549.fotonik3d_r	64	579	431	586	426	<u>580</u>	<u>430</u>	64	573	435	575	434	<u>574</u>	<u>435</u>
554.roms_r	64	418	243	415	245	<u>416</u>	<u>245</u>	64	<u>414</u>	<u>245</u>	418	243	414	246

SPECrate®2017_fp_base = **463**

SPECrate®2017_fp_peak = **466**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:
TDP: 400
Determinism Enable set to Power
PPT: 400
NPS: 4

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Jan 1 13:38:34 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```

16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

```

```

-----
2. w
13:38:34 up 4:53, 0 users, load average: 17.12, 48.72, 58.09
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6191057
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6191057
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/bin/sh ./1.sh
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.011/tempslogs/preenv.fprate.011.0.log --lognum 011.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name : AMD EPYC 9124 16-Core Processor

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```

vendor_id      : AuthenticAMD
cpu family    : 25
model         : 17
stepping      : 1
microcode     : 0xa101121
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size     : 3584 4K pages
cpu cores     : 16
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27
physical id 1: core ids 0-3,8-11,16-19,24-27
physical id 0: apicids 0-7,16-23,32-39,48-55
physical id 1: apicids 64-71,80-87,96-103,112-119

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9124 16-Core Processor
BIOS Model name:      AMD EPYC 9124 16-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:          3711.9141
CPU min MHz:           1500.0000
BogoMIPS:              5999.78
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp lm
                      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                      pni pclmulqdq monitor ssse3 fma cxl6 pcid sse4_1 sse4_2 x2apic movbe
                      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                      abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                      perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                      invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                      avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                      avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                      svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                      pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                      umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             1 MiB (32 instances)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```

L1i cache:          1 MiB (32 instances)
L2 cache:          32 MiB (32 instances)
L3 cache:          128 MiB (8 instances)
NUMA node(s):      8
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                          filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 95946 MB
node 0 free: 95347 MB
node 1 cpus: 4-7,36-39
node 1 size: 96766 MB
node 1 free: 96268 MB
node 2 cpus: 8-11,40-43
node 2 size: 96766 MB
node 2 free: 96270 MB
node 3 cpus: 12-15,44-47
node 3 size: 96766 MB
node 3 free: 96289 MB
node 4 cpus: 16-19,48-51
node 4 size: 96729 MB
node 4 free: 96213 MB
node 5 cpus: 20-23,52-55
node 5 size: 96766 MB
node 5 free: 96269 MB
node 6 cpus: 24-27,56-59
node 6 size: 96766 MB
node 6 free: 96253 MB
node 7 cpus: 28-31,60-63
node 7 size: 96716 MB
node 7 free: 96261 MB
node distances:
node  0  1  2  3  4  5  6  7

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```

0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:      791781228 kB

```

```

10. who -r
    run-level 3 Jan 1 08:45

```

```

11. Systemd service manager version: systemd 250 (250-6.e19_0)
    Default Target   Status
    multi-user       running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat man-db-restart-cache-update
nftables rdisc rhsm rhsm-facts rpmdm-rebuild serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.e19_0.x86_64
root=UUID=da6bcd86-e169-49dc-be09-79aca5bc5a8d
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=73e1e4c9-f998-43cc-8ff7-916ce4b89f9b
nohz_full=1-63

```

```

14. cpupower frequency-info
    analyzing CPU 0:
      current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                       The governor "performance" may decide which speed to use
                       within this range.

    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0: 3000MHz

```

```

15. tuned-adm active
    Current active profile: throughput-performance

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3       xfs       719G      27G  693G   4% /home
-----
21. /sys/devices/virtual/dmi/id
Product:        2258 V7
Product Family: Genoa
-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: INSYDE Corp.
BIOS Version: 1.06.29
BIOS Date: 11/23/2023
BIOS Revision: 1.6

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Peak Optimization Flags (Continued)

```
538.imagick_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

544.nab_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Peak Optimization Flags (Continued)

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

```
526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
-lamdalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9124)

SPECrate®2017_fp_base = 463

SPECrate®2017_fp_peak = 466

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2024
Hardware Availability: Nov-2023
Software Availability: Oct-2023

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvector-transform
-fscalar-transform -frecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-01 00:38:33-0500.

Report generated on 2024-02-14 12:25:15 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-14.