



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML350 Gen11

(2.20 GHz, Intel Xeon Silver 4516Y+)

## SPECrate®2017\_fp\_base = 566

## SPECrate®2017\_fp\_peak = 581

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

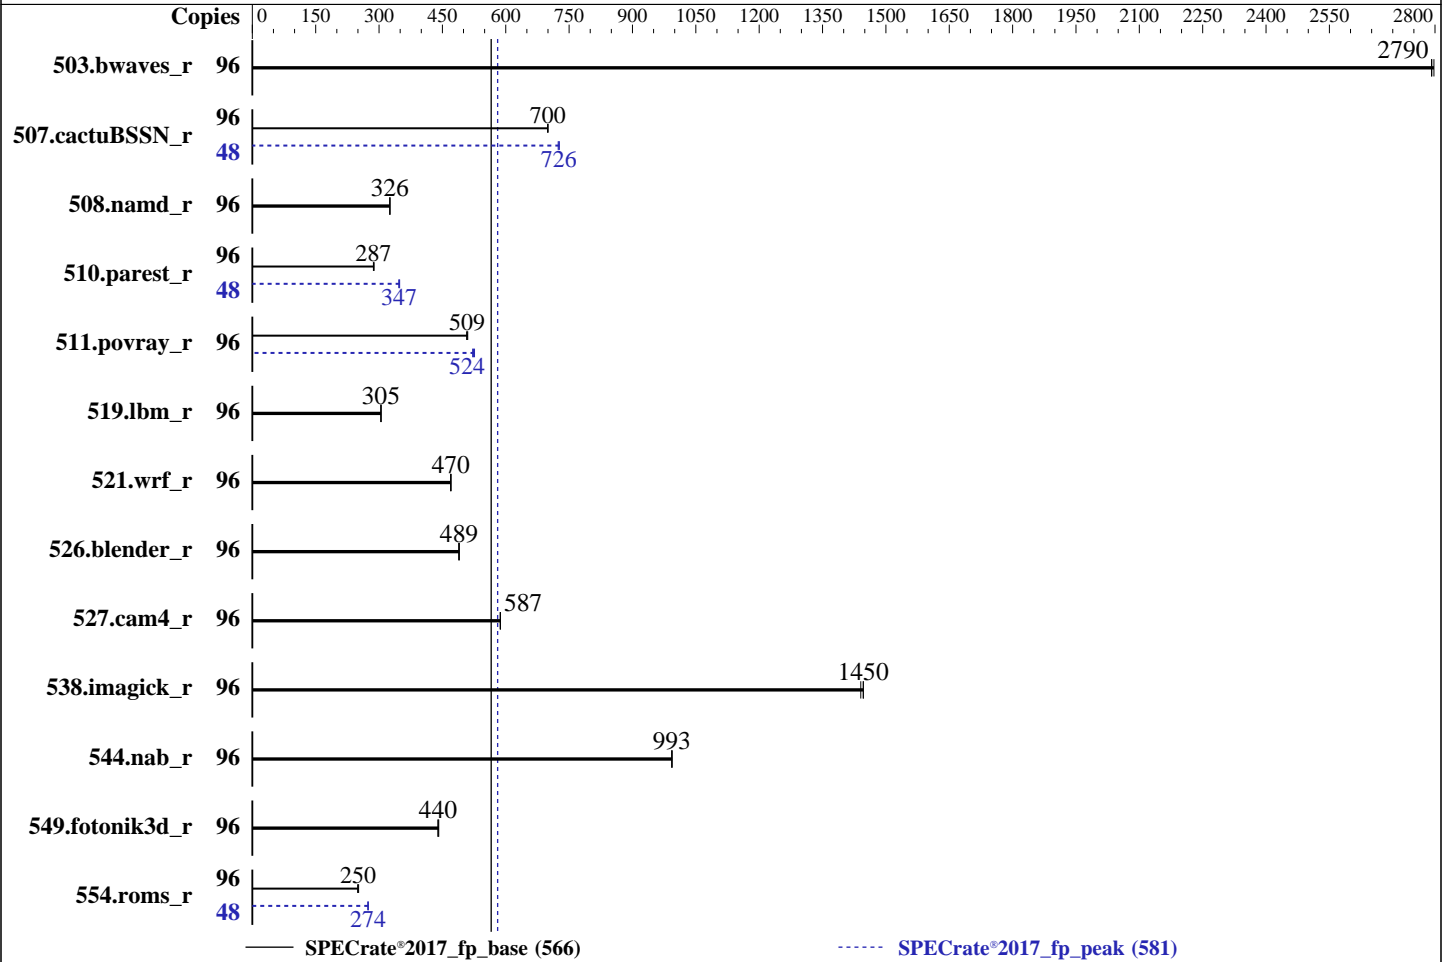

### Hardware

CPU Name: Intel Xeon Silver 4516Y+  
 Max MHz: 3700  
 Nominal: 2200  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 4400)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017\_fp\_base = 566

SPECrate®2017\_fp\_peak = 581

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	344	2800	345	2790	<b>345</b>	<b>2790</b>	96	344	2800	345	2790	<b>345</b>	<b>2790</b>
507.cactuBSSN_r	96	174	699	<b>174</b>	<b>700</b>	174	700	48	83.9	724	83.6	727	<b>83.7</b>	<b>726</b>
508.namd_r	96	280	326	280	326	<b>280</b>	<b>326</b>	96	280	326	280	326	<b>280</b>	<b>326</b>
510.parest_r	96	871	288	876	287	<b>874</b>	<b>287</b>	48	360	349	362	347	<b>361</b>	<b>347</b>
511.povray_r	96	<b>441</b>	<b>509</b>	440	510	442	507	96	430	522	<b>428</b>	<b>524</b>	426	526
519.lbm_r	96	<b>332</b>	<b>305</b>	332	305	332	304	96	<b>332</b>	<b>305</b>	332	305	332	304
521.wrf_r	96	458	470	<b>458</b>	<b>470</b>	457	470	96	458	470	<b>458</b>	<b>470</b>	457	470
526.blender_r	96	299	489	<b>299</b>	<b>489</b>	298	490	96	299	489	<b>299</b>	<b>489</b>	298	490
527.cam4_r	96	286	587	286	587	<b>286</b>	<b>587</b>	96	286	587	286	587	<b>286</b>	<b>587</b>
538.imagick_r	96	165	1450	<b>165</b>	<b>1450</b>	166	1440	96	165	1450	<b>165</b>	<b>1450</b>	166	1440
544.nab_r	96	163	994	<b>163</b>	<b>993</b>	163	993	96	163	994	<b>163</b>	<b>993</b>	163	993
549.fotonik3d_r	96	848	441	<b>851</b>	<b>440</b>	851	440	96	848	441	<b>851</b>	<b>440</b>	851	440
554.roms_r	96	606	252	<b>609</b>	<b>250</b>	612	249	48	<b>278</b>	<b>274</b>	279	274	278	274

SPECrate®2017\_fp\_base = **566**

SPECrate®2017\_fp\_peak = **581**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned service was stopped using "systemctl stop tuned"
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Mon Mar 11 17:24:34 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```
-----
2. w
   17:24:34 up 6:05, 0 users, load average: 51.32, 84.08, 91.33
USER      TTY      FROM      LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
-----
3. Username
   From environment variable $USER:  root
```

```
-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 2062747
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes      (-u) 2062747
   virtual memory          (kbytes, -v) unlimited
   file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 29
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: root@notty
   bash -c cd $SPEC/ && $SPEC/fprate.sh
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/temlogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) SILVER 4516Y+
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 207
   stepping        : 2
   microcode       : 0x21000200
   bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores       : 24
   siblings        : 48
   2 physical ids (chips)
   96 processors (hardware threads)
   physical id 0: core ids 0-23
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

physical id 1: core ids 0-23  
physical id 0: apicids 0-47  
physical id 1: apicids 128-175

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      96
On-line CPU(s) list:        0-95
Vendor ID:                   GenuineIntel
Model name:                   INTEL(R) XEON(R) SILVER 4516Y+
CPU family:                   6
Model:                       207
Thread(s) per core:          2
Core(s) per socket:          24
Socket(s):                   2
Stepping:                    2
BogoMIPS:                    4400.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                                avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   2.3 MiB (48 instances)
L1i cache:                   1.5 MiB (48 instances)
L2 cache:                    96 MiB (48 instances)
L3 cache:                    90 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-11,48-59
NUMA node1 CPU(s):          12-23,60-71
NUMA node2 CPU(s):          24-35,72-83
NUMA node3 CPU(s):          36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 128711 MB
node 0 free: 116107 MB
node 1 cpus: 12-23,60-71
node 1 size: 129017 MB
node 1 free: 118769 MB
node 2 cpus: 24-35,72-83
node 2 size: 129017 MB
node 2 free: 118741 MB
node 3 cpus: 36-47,84-95
node 3 size: 128962 MB
node 3 free: 118266 MB
node distances:
node  0  1  2  3
 0:  10  20  30  30
 1:  20  10  30  30
 2:  30  30  10  20
 3:  30  30  20  10

```

9. /proc/meminfo

MemTotal: 528087000 kB

10. who -r

run-level 3 Mar 11 11:20

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load lunmask
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect wickedd

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=4ccef2cd-b32f-4b9b-bff5-7836c4f7ec60
splash=silent
resume=/dev/disk/by-uuid/812398c6-312b-4436-8363-5af4d15d5dc3
mitigations=auto
quiet
security=apparmor
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5  
-----

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 xfs 381G 131G 250G 35% /home  
-----

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: ProLiant ML350 Gen11  
Product Family: ProLiant  
Serial: CNX20800N3  
-----

-----  
22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 4400  
-----

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HPE  
BIOS Version: 2.12  
BIOS Date: 12/13/2023  
BIOS Revision: 2.12  
Firmware Revision: 1.54  
-----

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
 C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
 =====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
 Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
 =====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
 Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
 =====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017\_fp\_base = 566

SPECrate®2017\_fp\_peak = 581

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:

`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`519.lbm_r: basepeak = yes`

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.20 GHz, Intel Xeon Silver 4516Y+)

**SPECrate®2017\_fp\_base = 566**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-11 07:54:34-0400.

Report generated on 2024-04-09 15:50:30 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.