



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant MicroServer Gen11
(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

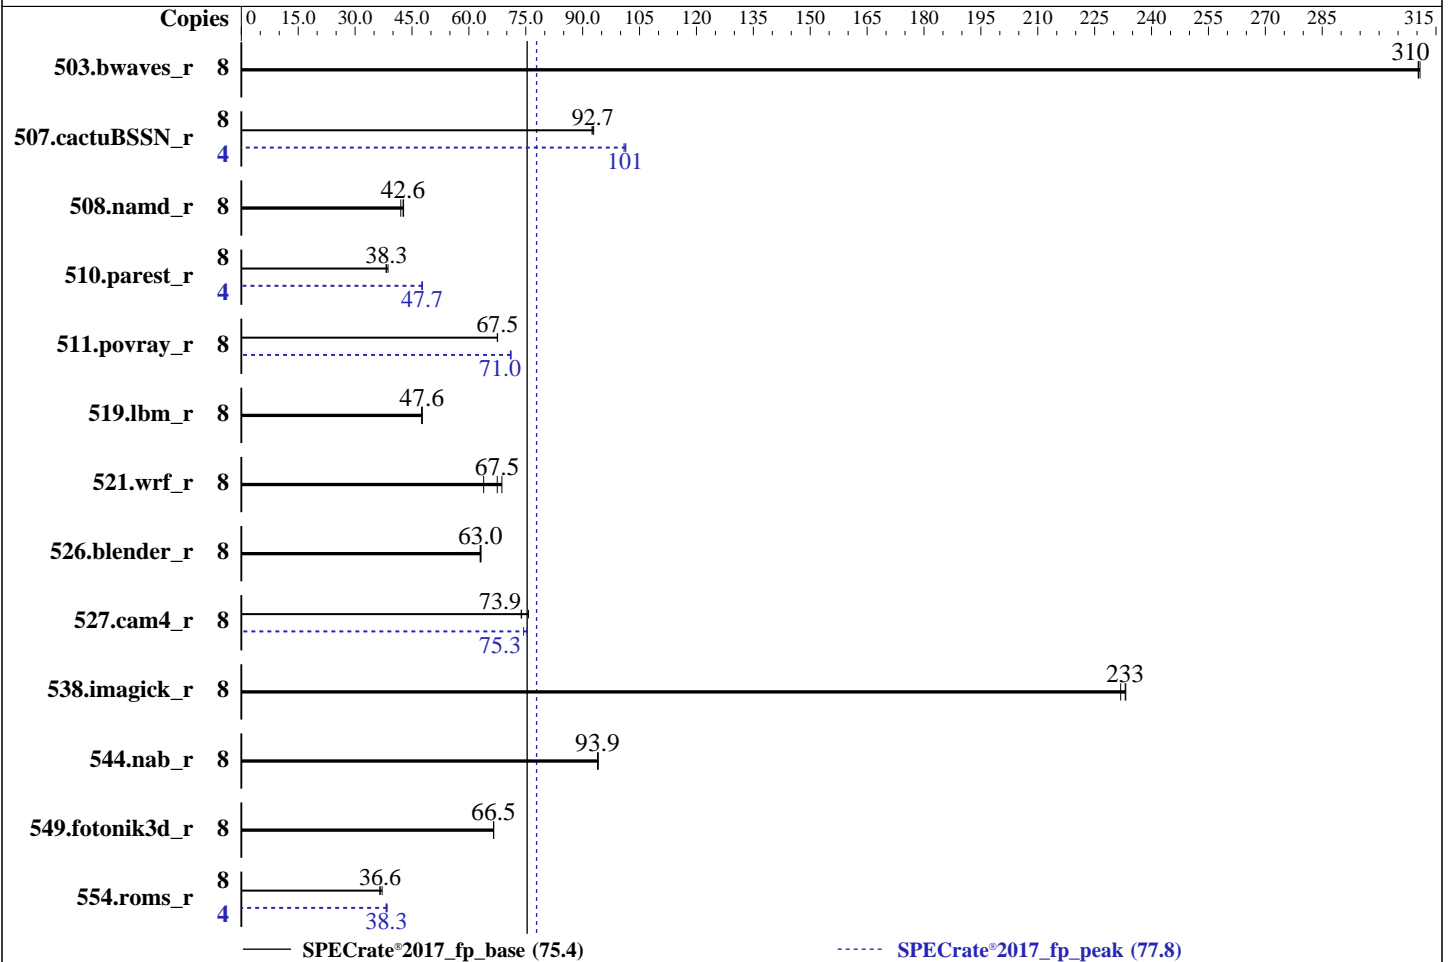

Hardware

CPU Name: Intel Xeon E-2434
 Max MHz: 5000
 Nominal: 3400
 Enabled: 4 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-R, running at 4400), orderable using HPE part# P64339-B21
 Storage: 1 x 1 TB 7.2 K SATA HDD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 Kernel 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.48 03/14/2024 released Mar-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	259	310	258	311	<u>258</u>	<u>310</u>	8	259	310	258	311	<u>258</u>	<u>310</u>
507.cactuBSSN_r	8	109	92.9	110	92.5	<u>109</u>	<u>92.7</u>	4	50.0	101	50.2	101	<u>50.0</u>	<u>101</u>
508.namd_r	8	181	42.0	178	42.8	<u>178</u>	<u>42.6</u>	8	181	42.0	178	42.8	<u>178</u>	<u>42.6</u>
510.parest_r	8	<u>547</u>	<u>38.3</u>	541	38.7	548	38.2	4	220	47.6	219	47.8	<u>220</u>	<u>47.7</u>
511.povray_r	8	<u>277</u>	<u>67.5</u>	276	67.6	277	67.5	8	263	70.9	<u>263</u>	<u>71.0</u>	263	71.1
519.lbm_r	8	<u>177</u>	<u>47.6</u>	177	47.6	177	47.7	8	<u>177</u>	<u>47.6</u>	177	47.6	177	47.7
521.wrf_r	8	<u>266</u>	<u>67.5</u>	280	63.9	261	68.7	8	<u>266</u>	<u>67.5</u>	280	63.9	261	68.7
526.blender_r	8	193	63.2	<u>193</u>	<u>63.0</u>	193	63.0	8	193	63.2	<u>193</u>	<u>63.0</u>	193	63.0
527.cam4_r	8	185	75.7	<u>189</u>	<u>73.9</u>	190	73.8	8	186	75.4	188	74.4	<u>186</u>	<u>75.3</u>
538.imagick_r	8	<u>85.4</u>	<u>233</u>	85.3	233	85.8	232	8	<u>85.4</u>	<u>233</u>	85.3	233	85.8	232
544.nab_r	8	<u>143</u>	<u>93.9</u>	143	94.1	143	93.9	8	<u>143</u>	<u>93.9</u>	143	94.1	143	93.9
549.fotonik3d_r	8	<u>469</u>	<u>66.5</u>	469	66.5	469	66.5	8	<u>469</u>	<u>66.5</u>	469	66.5	469	66.5
554.roms_r	8	<u>347</u>	<u>36.6</u>	342	37.1	348	36.5	4	167	38.2	165	38.4	<u>166</u>	<u>38.3</u>

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Enabled

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Sun Apr 14 09:38:06 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
09:38:06 up 2 min, 0 users, load average: 0.19, 0.10, 0.04
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 256675
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 256675
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fprate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 -c
ic2024.0.2-lin-core-avx2-rate-20231213.cfg --define smt-on --define cores=4 --define physicalfirst
--define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 --configfile
ic2024.0.2-lin-core-avx2-rate-20231213.cfg --define smt-on --define cores=4 --define physicalfirst
--define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

```

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) E E-2434
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping       : 1
microcode      : 0x121
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 4
siblings       : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-3
physical id 0: apicids 0-7
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.4:

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 48 bits virtual
Byte Order:                   Little Endian
CPU(s):                       8
On-line CPU(s) list:         0-7
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) E E-2434
BIOS Model name:             Intel(R) Xeon(R) E E-2434
CPU family:                   6
Model:                        183
Thread(s) per core:          2
Core(s) per socket:          4
Socket(s):                    1
Stepping:                     1
BogoMIPS:                     6835.20
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                                ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                                tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                                clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                                avx_vnni dtherm ida arat pln pts hfi umip pku ospke waitpkg gfni vaes
                                vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig
                                arch_lbr ibt flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   192 KiB (4 instances)
L1i cache:                   128 KiB (4 instances)
L2 cache:                    8 MiB (4 instances)
L3 cache:                    12 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):          0-7
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW
                                sequence
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL  SETS PHY-LINE COHERENCY-SIZE
L1d   48K   192K   12 Data          1     64     1           64
L1i   32K   128K    8 Instruction    1     64     1           64
L2    2M    8M    16 Unified        2   2048     1           64
L3   12M   12M    6 Unified        3  32768     1           64

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```
available: 1 nodes (0)
node 0 cpus: 0-7
node 0 size: 64210 MB
node 0 free: 63598 MB
node distances:
node 0
0: 10
```

```
-----
9. /proc/meminfo
MemTotal: 65751668 kB
```

```
-----
10. who -r
run-level 3 Apr 14 09:36
```

```
-----
11. Systemd service manager version: systemd 252 (252-13.el9_2)
Default Target Status
multi-user running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor
microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
systemd-boot-update systemd-network-generator udisks2
enabled-runtime systemd-remount-fs
disabled blk-availability chrony-wait chronyd console-getty cpupower debug-shell dnf-system-upgrade
hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```

vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release          Red Hat Enterprise Linux 9.2 (Plow)
redhat-release      Red Hat Enterprise Linux release 9.2 (Plow)
system-release      Red Hat Enterprise Linux release 9.2 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /home/CPU2017
Filesystem          Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs       829G   94G  735G  12% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:             HPE
Product:            ProLiant MicroServer Gen11
Product Family:    ProLiant
Serial:             JRT31JQXTD

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Hynix HMC888AGBEA084N 32 GB 2 rank 5600, configured at 4400

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Platform Notes (Continued)

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 1.48
BIOS Date: 03/14/2024
BIOS Revision: 1.48
Firmware Revision: 1.56

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

554.roms_r (continued):

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11

(3.40 Ghz, Intel Xeon E-2434)

SPECrate®2017_fp_base = 75.4

SPECrate®2017_fp_peak = 77.8

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-14 00:08:06-0400.

Report generated on 2024-05-21 19:23:54 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-21.