



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

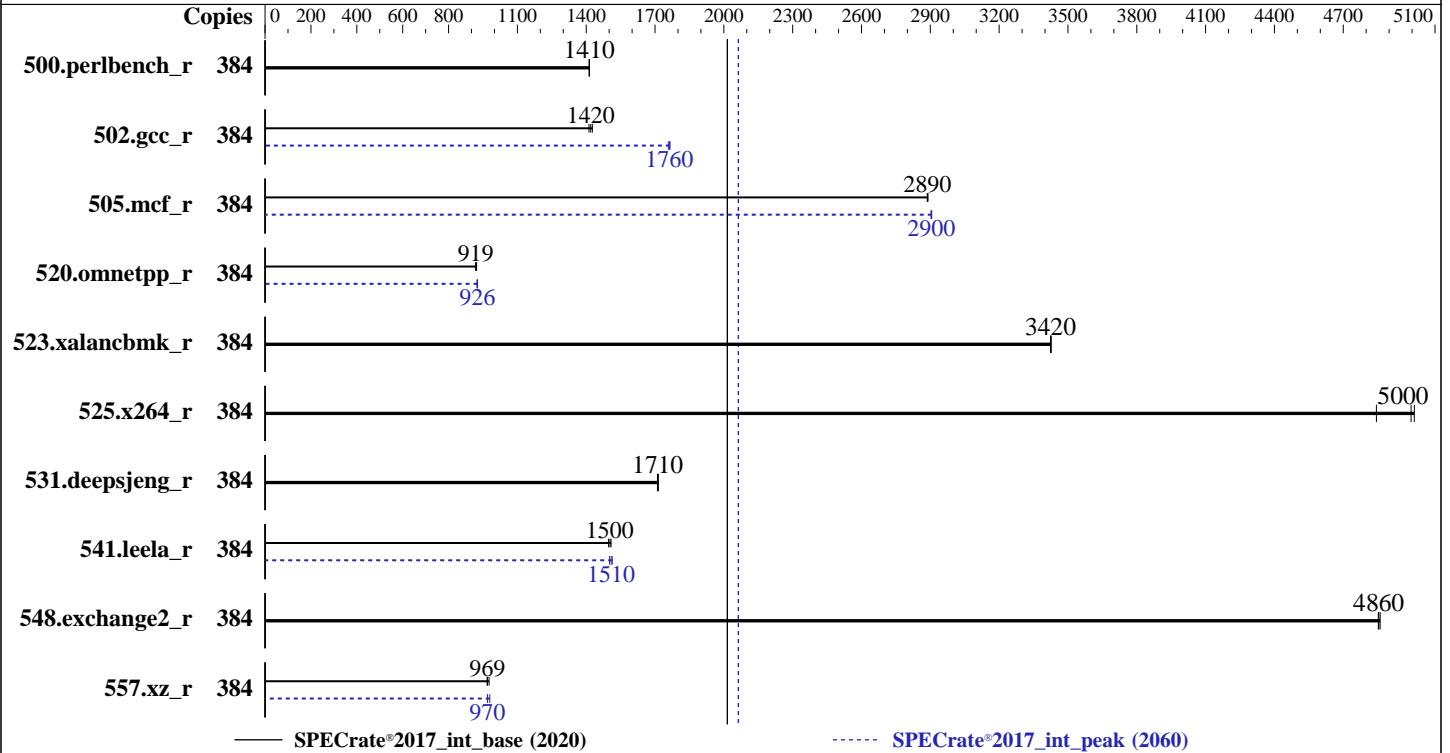

Hardware

CPU Name: AMD EPYC 9655
 Max MHz: 4500
 Nominal: 2600
 Enabled: 192 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kerenl 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version KAE125W 5.10 released Aug-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	432	1410	432	1410	433	1410	384	432	1410	432	1410	433	1410
502.gcc_r	384	385	1410	381	1430	383	1420	384	308	1760	309	1760	308	1760
505.mcf_r	384	215	2890	215	2890	215	2890	384	214	2900	214	2910	214	2900
520.omnetpp_r	384	548	919	546	922	549	918	384	545	924	544	926	544	926
523.xalancbmk_r	384	118	3420	118	3430	118	3420	384	118	3420	118	3430	118	3420
525.x264_r	384	139	4840	135	5000	134	5010	384	139	4840	135	5000	134	5010
531.deepsjeng_r	384	257	1710	257	1710	257	1710	384	257	1710	257	1710	257	1710
541.leela_r	384	425	1500	422	1510	423	1500	384	423	1500	420	1510	421	1510
548.exchange2_r	384	207	4860	207	4850	207	4860	384	207	4860	207	4850	207	4860
557.xz_r	384	425	977	428	968	428	969	384	423	980	428	969	427	970

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-a
occ500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA Nodes per Socket set to NPS4

P-State set to Enabled

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Sep 21 09:34:44 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Platform Notes (Continued)

1. `uname -a`
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. `w`
09:34:44 up 5:27, 1 user, load average: 107.71, 296.32, 350.55
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. `ulimit -a`
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3093357
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3093357
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run025-compliant-amd-rateint.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.027/templogs/preenv.intrate.027.0.log --lognum 027.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1

6. `/proc/cpuinfo`
model name : AMD EPYC 9655 96-Core Processor
vendor_id : AuthenticAMD
cpu family : 26
model : 2
stepping : 1
microcode : 0xb00210e

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 96
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9655 96-Core Processor
BIOS Model name:      AMD EPYC 9655 96-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:   58%
CPU max MHz:           4509.3750
CPU min MHz:           1500.0000
BogoMIPS:              5192.25
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpoptndq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
Virtualization:        AMD-V
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```

L1d cache:          9 MiB (192 instances)
L1i cache:          6 MiB (192 instances)
L2 cache:           192 MiB (192 instances)
L3 cache:           768 MiB (24 instances)
NUMA node(s):       8
NUMA node0 CPU(s): 0-23,192-215
NUMA node1 CPU(s): 24-47,216-239
NUMA node2 CPU(s): 48-71,240-263
NUMA node3 CPU(s): 72-95,264-287
NUMA node4 CPU(s): 96-119,288-311
NUMA node5 CPU(s): 120-143,312-335
NUMA node6 CPU(s): 144-167,336-359
NUMA node7 CPU(s): 168-191,360-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-23,192-215
node 0 size: 96261 MB
node 0 free: 95259 MB
node 1 cpus: 24-47,216-239
node 1 size: 96716 MB
node 1 free: 95763 MB
node 2 cpus: 48-71,240-263
node 2 size: 96755 MB
node 2 free: 95572 MB
node 3 cpus: 72-95,264-287
node 3 size: 96755 MB
node 3 free: 95900 MB
node 4 cpus: 96-119,288-311
node 4 size: 96755 MB
node 4 free: 95805 MB
node 5 cpus: 120-143,312-335
node 5 size: 96755 MB
node 5 free: 95846 MB
node 6 cpus: 144-167,336-359
node 6 size: 96755 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```

node 6 free: 95873 MB
node 7 cpus: 168-191,360-383
node 7 size: 96609 MB
node 7 free: 95707 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      791926364 kB

```

```

-----
10. who -r
    run-level 3 Sep 21 04:07

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target  Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog sapconf smartd
sshd sysctl-logger systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd
generated ntp_sync
indirect systemd-userdbd uidd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=36ce2ea9-ca92-4f5a-b22a-9bea62fad028
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
    analyzing CPU 80:
        current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                        The governor "performance" may decide which speed to use

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active
Current active profile: virtual-host

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 5
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 442G 85G 357G 20% /

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR645 V3
Product Family: ThinkSystem
Serial: 1234567890

22. dmidecode
Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
12x SK Hynix HMC88AHBRA471N 32 GB 2 rank 6400, configured at 6000
2x SK Hynix HMC88AHBRA472N 32 GB 2 rank 6400, configured at 6000
10x SK Hynix HMC88AHBRA478N 32 GB 2 rank 6400, configured at 6000

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: KAE125W-5.10
BIOS Date: 08/02/2024
BIOS Revision: 5.10
Firmware Revision: 53.5

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Compiler Version Notes (Continued)

| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Base Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand

-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM

-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext  
-ldl
```

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 2020

SPECrate®2017_int_peak = 2060

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
```

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-20 21:34:43-0400.

Report generated on 2024-10-10 09:52:08 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.