



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

### meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358


Test Date: Sep-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

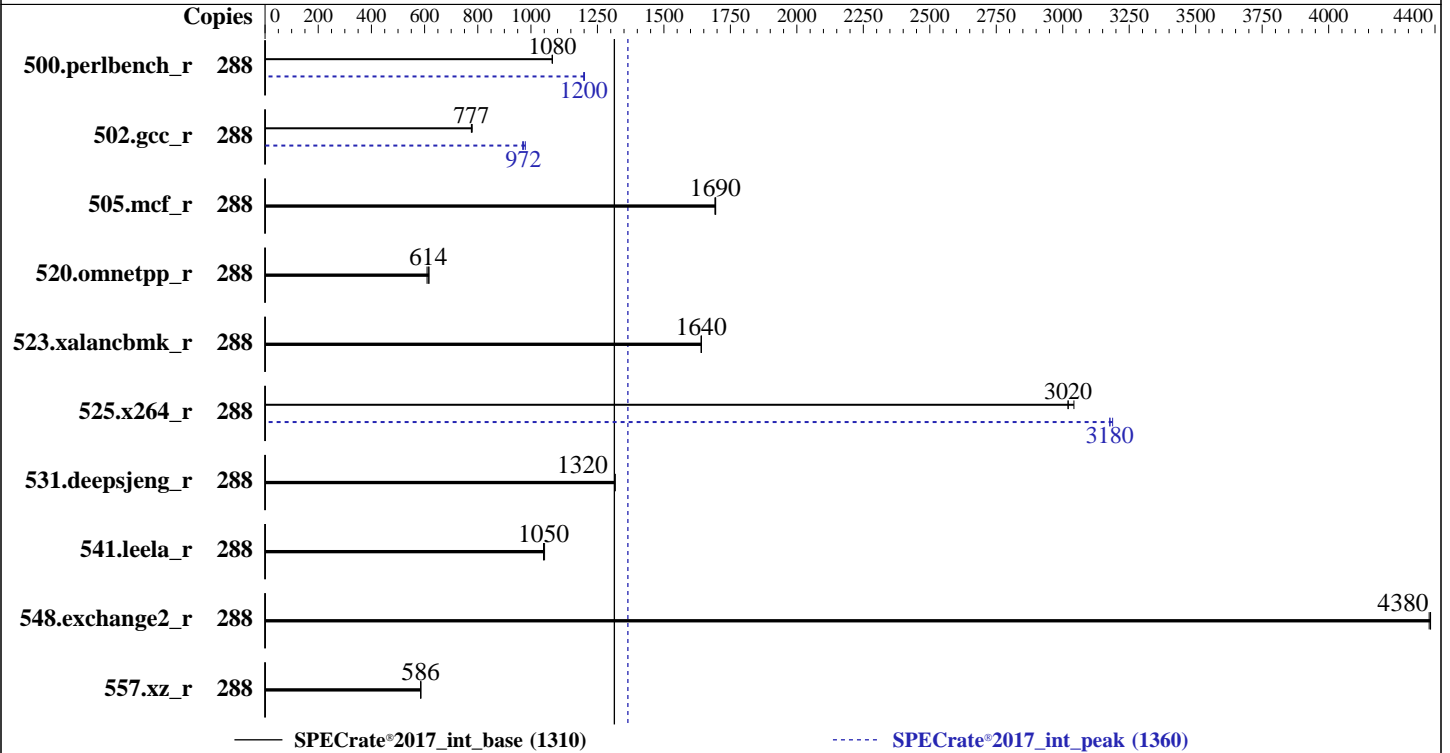

### Hardware

CPU Name: Intel Xeon 6766E  
 Max MHz: 2700  
 Nominal: 1900  
 Enabled: 288 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 4 MB I+D on chip per core  
 L3: 108 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 00.14.04 released Jul-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	288	425	1080	<b>424</b>	<b>1080</b>	424	1080	288	382	1200	383	1200	<b>382</b>	<b>1200</b>
502.gcc_r	288	523	779	526	776	<b>525</b>	<b>777</b>	288	<b>419</b>	<b>972</b>	421	969	417	979
505.mcf_r	288	275	1690	275	1690	<b>275</b>	<b>1690</b>	288	275	1690	275	1690	<b>275</b>	<b>1690</b>
520.omnetpp_r	288	613	617	<b>615</b>	<b>614</b>	620	609	288	613	617	<b>615</b>	<b>614</b>	620	609
523.xalancbmk_r	288	185	1640	185	1640	<b>185</b>	<b>1640</b>	288	185	1640	185	1640	<b>185</b>	<b>1640</b>
525.x264_r	288	<b>167</b>	<b>3020</b>	166	3040	167	3020	288	159	3180	158	3190	<b>159</b>	<b>3180</b>
531.deepsjeng_r	288	251	1320	<b>251</b>	<b>1320</b>	251	1320	288	251	1320	<b>251</b>	<b>1320</b>	251	1320
541.leela_r	288	455	1050	454	1050	<b>455</b>	<b>1050</b>	288	455	1050	454	1050	<b>455</b>	<b>1050</b>
548.exchange2_r	288	172	4380	172	4380	<b>172</b>	<b>4380</b>	288	172	4380	172	4380	<b>172</b>	<b>4380</b>
557.xz_r	288	531	586	531	585	<b>531</b>	<b>586</b>	288	531	586	531	585	<b>531</b>	<b>586</b>

SPECrate®2017\_int\_base = 1310

SPECrate®2017\_int\_peak = 1360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Sep 3 11:29:13 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
11:29:13 up 0 min, 1 user, load average: 2.15, 0.71, 0.25  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 11:28 9.00s 1.86s 0.05s sh  
reportable-ic2024.1-lin-sierraforest-rate-20240308.sh  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

### meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4124139
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4124139
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
sh reportable-ic2024.1-lin-sierraforest-rate-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
ic2024.1-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=288 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
ic2024.1-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=288 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base,peak --output_format all
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6766E
vendor_id      : GenuineIntel
cpu family      : 6
model          : 175
stepping       : 3
microcode      : 0x3000190
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 144
siblings       : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-143
physical id 1: core ids 0-143
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

### meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Platform Notes (Continued)

physical id 1: apicids

512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                288
On-line CPU(s) list:  0-287
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6766E
BIOS Model name:      Intel(R) Xeon(R) 6766E  CPU @ 1.9GHz
BIOS CPU family:      179
CPU family:            6
Model:                 175
Thread(s) per core:   1
Core(s) per socket:   144
Socket(s):             2
Stepping:              3
Frequency boost:       enabled
CPU(s) scaling MHz:   43%
CPU max MHz:           1901.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect user_shstk avx_vnni lam wbnoinvd
dtherm ida arat pln pts umip pku ospke waitpkg gfni vaes vpclmulqdq
tme rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
md_clear serialize pconfig arch_lbr ibt flush_lld arch_capabilities

L1d cache:             9 MiB (288 instances)
L1i cache:             18 MiB (288 instances)
L2 cache:              288 MiB (72 instances)
L3 cache:              216 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-143
NUMA node1 CPU(s):    144-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:    Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

### Platform Notes (Continued)

Vulnerability L1tf: Not affected  
 Vulnerability Mds: Not affected  
 Vulnerability Meltdown: Not affected  
 Vulnerability Mmio stale data: Not affected  
 Vulnerability Reg file data sampling: Not affected  
 Vulnerability Retbleed: Not affected  
 Vulnerability Spec rstack overflow: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	9M	8	Data	1	64	1	64
L1i	64K	18M	8	Instruction	1	128	1	64
L2	4M	288M	16	Unified	2	4096	1	64
L3	108M	216M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-143
node 0 size: 515452 MB
node 0 free: 514067 MB
node 1 cpus: 144-287
node 1 size: 515608 MB
node 1 free: 514187 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10
```

9. /proc/meminfo

MemTotal: 1055806592 kB

10. who -r

run-level 3 Sep 3 11:28

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
irbbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor
nscd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

### Platform Notes (Continued)

```

multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
indirect          systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=18377317-737e-4218-af3f-1dfefc7f1bec
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=371M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 267:
  current policy: frequency should be within 800 MHz and 1.90 GHz.
                  The governor "ondemand" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

### meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```

max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  xfs   892G  180G  712G  21% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          IEIT SYSTEMS
Product:         NF5180-M8-A0-R0-00
Product Family: Not specified
Serial:         000000000

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:     American Megatrends International, LLC.
BIOS Version:    00.14.04
BIOS Date:       07/29/2024

```

## Compiler Version Notes

```

=====
C      | 502.gcc_r(peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```

```

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```

```

=====
C      | 502.gcc_r(peak)

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Base Portability Flags (Continued)

541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Peak Portability Flags (Continued)

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc\_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 1310

meta brain NF5180G8 (Intel Xeon 6766E)

SPECrate®2017\_int\_peak = 1360

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-03 11:29:12-0400.

Report generated on 2024-10-23 13:32:16 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-23.