



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Nov-2024

Software Availability: Jun-2024

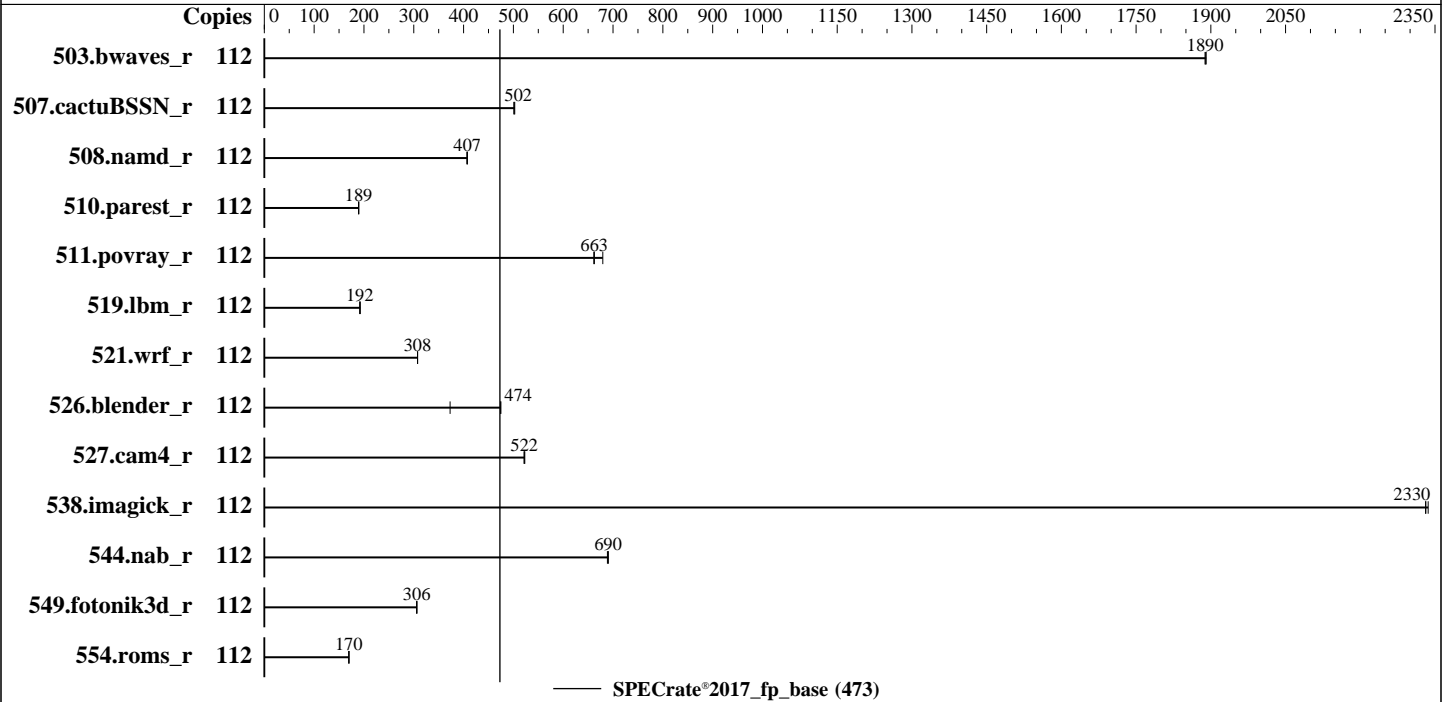

Hardware

CPU Name: Intel Xeon 6746E
 Max MHz: 2700
 Nominal: 2000
 Enabled: 112 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 96 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)
 Storage: 1 x 960 GB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version DBE103L 1.10 released Sep-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	<u>595</u>	<u>1890</u>	595	1890	594	1890							
507.cactuBSSN_r	112	282	503	283	501	<u>283</u>	<u>502</u>							
508.namd_r	112	261	408	262	407	<u>261</u>	<u>407</u>							
510.parest_r	112	1548	189	1547	189	<u>1547</u>	<u>189</u>							
511.povray_r	112	395	661	385	679	<u>395</u>	<u>663</u>							
519.lbm_r	112	616	192	<u>615</u>	<u>192</u>	613	192							
521.wrf_r	112	816	308	816	308	<u>816</u>	<u>308</u>							
526.blender_r	112	457	373	<u>359</u>	<u>474</u>	359	475							
527.cam4_r	112	375	523	<u>375</u>	<u>522</u>	376	522							
538.imagick_r	112	119	2330	119	2340	<u>119</u>	<u>2330</u>							
544.nab_r	112	274	689	<u>273</u>	<u>690</u>	273	690							
549.fotonik3d_r	112	1426	306	<u>1426</u>	<u>306</u>	1426	306							
554.roms_r	112	1049	170	1048	170	<u>1048</u>	<u>170</u>							

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 473

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Workload Profile set to High Performance Computing

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Nov 8 05:21:36 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
 05:21:36 up 3 min,  1 user,  load average: 0.06, 0.13, 0.06
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT

```

```

3. Username
From environment variable $USER:  root

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size          (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size              (blocks, -f) unlimited
   pending signals        (-i) 2062115
   max locked memory      (kbytes, -l) 8192
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size            (kbytes, -s) unlimited
   cpu time              (seconds, -t) unlimited
   max user processes     (-u) 2062115
   virtual memory        (kbytes, -v) unlimited
   file locks            (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=42
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: root [priv]
   sshd: root@notty
   /bin/bash ./02.remote_local_SPECCpu_1.01.sh
   sh Run703-compliant-ic2024.1-lin-sierraforest-ratefp-base-20240308.sh
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=56 --define
   physicalfirst --define no-numa --reportable --tune base -o all --define drop_caches fprate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=56 --define
   physicalfirst --define no-numa --reportable --tune base --output_format all --define drop_caches --nopower
   --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.424/temlogs/preenv.fprate.424.0.log --lognum 424.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017-1.1.9-ic2024.1

```

```

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) 6746E
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 175
   stepping       : 3
   microcode      : 0x3000270
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
   cpu cores      : 112
   siblings       : 112
   1 physical ids (chips)
   112 processors (hardware threads)
   physical id 0: core ids 0-111
   physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
   ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
   32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
   4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 473

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:  0-111
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6746E
BIOS Model name:      Intel(R) Xeon(R) 6746E UNKNOWN CPU @ 2.0GHz
BIOS CPU family:      179
CPU family:           6
Model:                 175
Thread(s) per core:   1
Core(s) per socket:   112
Socket(s):             1
Stepping:              3
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize pconfig arch_lbr ibt flush_l1d arch_capabilities

Virtualization:       VT-x
L1d cache:            3.5 MiB (112 instances)
L1i cache:            7 MiB (112 instances)
L2 cache:             112 MiB (28 instances)
L3 cache:             96 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):   0-111
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:               Not affected
Vulnerability Tsx async abort:     Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3.5M	8	Data	1	64	1	64
L1i	64K	7M	8	Instruction	1	128	1	64
L2	4M	112M	16	Unified	2	4096	1	64
L3	96M	96M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-111
node 0 size: 515555 MB
node 0 free: 514401 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 527928704 kB
```

10. who -r

```
run-level 3 Nov 8 05:19
```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievmd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=003918da-aeca-4208-af37-126b2acc4e65
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 56:
Unable to determine current policy
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Nov-2024

Software Availability: Jun-2024

Platform Notes (Continued)

boost state support:
Supported: yes
Active: yes

```
-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 893G 48G 846G 6% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SD520 V4 Planar
Product Family: ThinkSystem
Serial:      1234567890
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 5600
2x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400, configured at 5600

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:
BIOS Version: DBE103L-1.10
BIOS Date: 09/12/2024
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Nov-2024

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 473

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017_fp_base = 473

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Nov-2024

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-07 16:21:35-0500.

Report generated on 2024-12-05 10:05:01 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-03.