



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

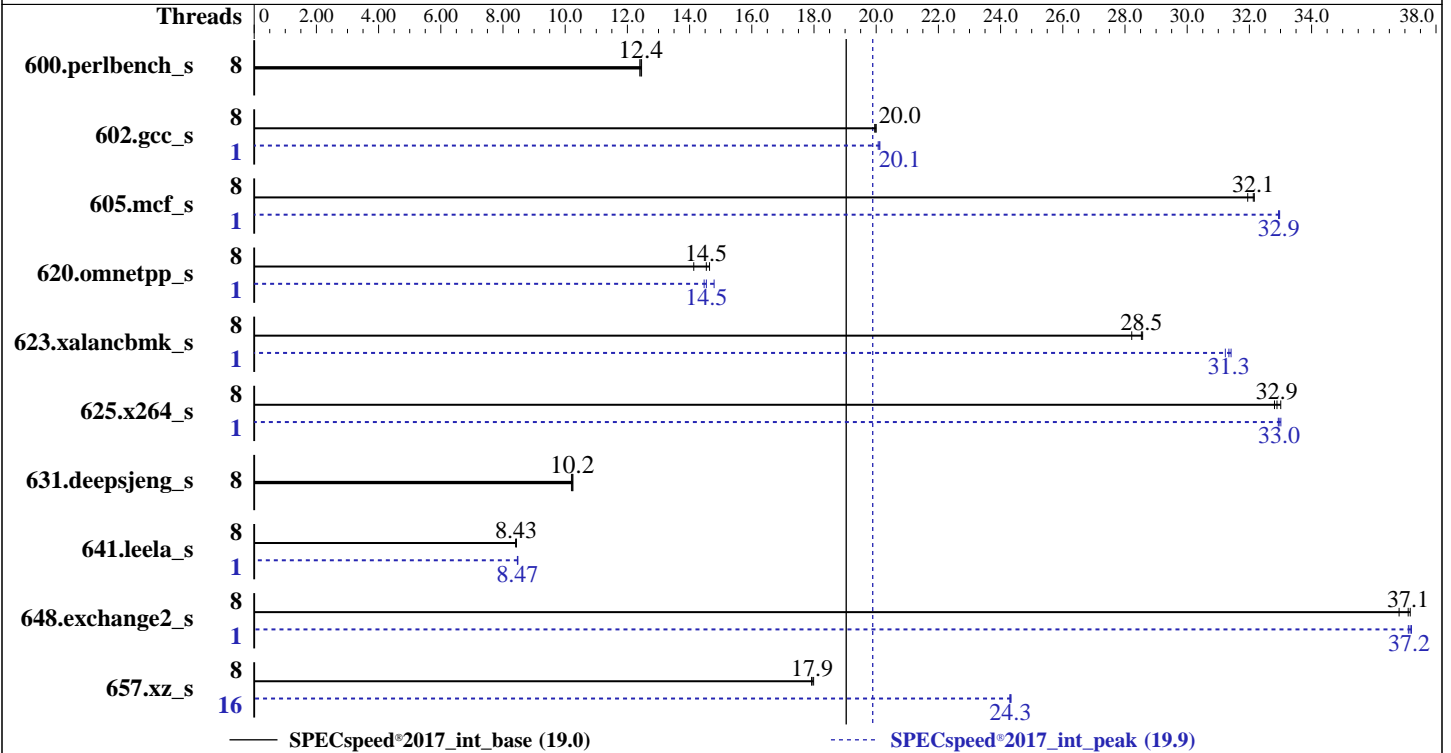

Hardware

CPU Name: AMD EPYC 4344P
 Max MHz: 5300
 Nominal: 3800
 Enabled: 8 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 32 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 5200)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version QIE101W 1.10 released Nov-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: OS set to balance power and performance



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECSpeed®2017_int_base = 19.0

SPECSpeed®2017_int_peak = 19.9

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	8	142	12.5	143	12.4	143	12.4	8	142	12.5	143	12.4	143	12.4
602.gcc_s	8	199	20.0	200	20.0	199	20.0	1	198	20.1	198	20.1	198	20.1
605.mcf_s	8	147	32.1	147	32.2	148	31.9	1	143	32.9	143	32.9	143	33.0
620.omnetpp_s	8	112	14.5	115	14.1	111	14.6	1	113	14.5	112	14.5	110	14.8
623.xalancbmk_s	8	50.2	28.2	49.6	28.6	49.7	28.5	1	45.4	31.2	45.1	31.4	45.2	31.3
625.x264_s	8	53.6	32.9	53.8	32.8	53.4	33.0	1	53.6	32.9	53.5	33.0	53.4	33.0
631.deepsjeng_s	8	140	10.2	140	10.2	140	10.2	8	140	10.2	140	10.2	140	10.2
641.leela_s	8	202	8.43	203	8.41	202	8.43	1	201	8.47	201	8.48	202	8.46
648.exchange2_s	8	79.2	37.1	79.9	36.8	79.1	37.2	1	79.1	37.2	79.0	37.2	79.2	37.1
657.xz_s	8	344	18.0	345	17.9	345	17.9	16	254	24.3	254	24.3	254	24.3

SPECSpeed®2017_int_base = **19.0**

SPECSpeed®2017_int_peak = **19.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-15"
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-
  aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "16"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-15"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 22 20:01:14 2024
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. systemctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:01:14 up 1 min, 1 user, load average: 0.10, 0.03, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 172.30.81.2 20:00 25.00s 0.72s 0.02s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 253429
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 253429
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 19.0

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/bash ./03.local_run_SPECCpu.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeak
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeak intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.027/templogs/preenv.intspeak.027.0.log --lognum 027.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1

-----
6. /proc/cpuinfo
model name      : AMD EPYC 4344P 8-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 97
stepping       : 2
microcode      : 0xa601209
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs0
TLB size      : 3584 4K pages
cpu cores      : 8
siblings       : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 4344P 8-Core Processor
BIOS Model name:      AMD EPYC 4344P 8-Core Processor
BIOS CPU family:      107
CPU family:           25
Model:                97
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             1
Stepping:              2
Frequency boost:       enabled
None CPU @ 3.8GHz

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 19.0

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```

CPU(s) scaling MHz:          57%
CPU max MHz:                5388.2808
CPU min MHz:                 3000.0000
BogoMIPS:                    7585.32
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                               rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                               extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16
                               sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                               cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                               osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                               perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                               ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                               invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                               clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                               xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc
                               arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                               decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif
                               x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni
                               vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpoptntdq rdpid
                               overflow_recov succor smca flush_l1d
Virtualization:              AMD-V
L1d cache:                   256 KiB (8 instances)
L1i cache:                   256 KiB (8 instances)
L2 cache:                    8 MiB (8 instances)
L3 cache:                    32 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):          0-15
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability Lltf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                               always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	256K	8	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	1M	8M	8	Unified	2	2048	1	64
L3	32M	32M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 63407 MB
node 0 free: 62837 MB
node distances:

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 0
0: 10
```

```
9. /proc/meminfo
MemTotal: 64929396 kB
```

```
10. who -r
run-level 3 Apr 22 20:00
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
systemd-timesyncd
indirect systemd-userdbd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=69af5974-2680-4d0c-9805-7dae997bdc7d
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 7:
current policy: frequency should be within 3.00 GHz and 3.80 GHz.
The governor "ondemand" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
```

```
15. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```

vm.dirty_ratio                8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   893G  43G  851G   5% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          LENOVO
Product:         ThinkSystem ST45 V3
Product Family: ThinkSystem
Serial:          INVALID

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x SK Hynix HMC88AGBEA084N 32 GB 2 rank 5600, configured at 5200

```

22. BIOS

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: LENOVO
BIOS Version: QIE101W-1.10
BIOS Date: 11/11/2024
BIOS Revision: 1.10
Firmware Revision: 12.65

ST45 V3 CPU performance result based on 65W maximum consumption limit.

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 648.exchange2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 19.0

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-DSPEC_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: Same as 602.gcc_s

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

641.leela_s (continued):

```
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-22 08:01:14-0400.

Report generated on 2025-01-15 12:32:21 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-14.