



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358


Test Date: Nov-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

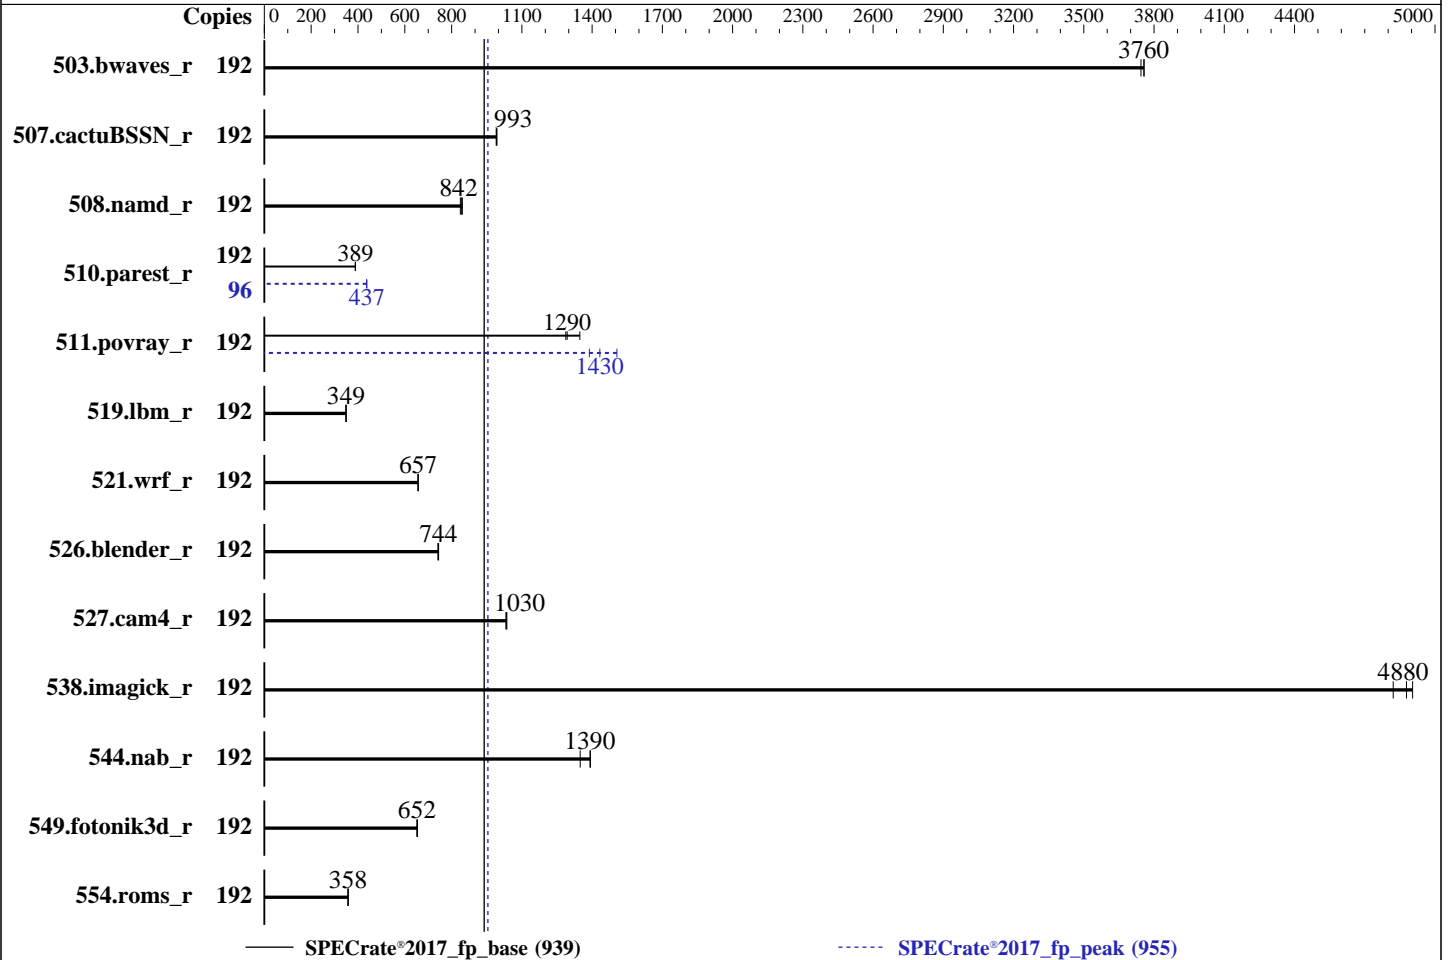

Hardware

CPU Name: Intel Xeon 6740E
 Max MHz: 3200
 Nominal: 2400
 Enabled: 192 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 96 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 960 GB SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 00.17.03 released Sep-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	512	3760	514	3740	513	3760	192	512	3760	514	3740	513	3760
507.cactuBSSN_r	192	245	993	245	993	245	990	192	245	993	245	993	245	990
508.namd_r	192	218	837	217	842	216	846	192	218	837	217	842	216	846
510.parest_r	192	1293	388	1291	389	1290	389	96	574	437	575	437	574	437
511.povray_r	192	333	1350	347	1290	348	1290	192	298	1510	323	1390	313	1430
519.lbm_r	192	580	349	580	349	580	349	192	580	349	580	349	580	349
521.wrf_r	192	655	657	655	657	655	657	192	655	657	655	657	655	657
526.blender_r	192	393	744	395	741	393	744	192	393	744	395	741	393	744
527.cam4_r	192	325	1030	325	1030	324	1040	192	325	1030	325	1030	324	1040
538.imagick_r	192	97.9	4880	97.4	4900	99.0	4820	192	97.9	4880	97.4	4900	99.0	4820
544.nab_r	192	232	1390	232	1390	240	1350	192	232	1390	232	1390	240	1350
549.fotonik3d_r	192	1147	652	1147	652	1144	654	192	1147	652	1147	652	1144	654
554.roms_r	192	852	358	854	357	852	358	192	852	358	854	357	852	358

SPECrate®2017_fp_base = **939**

SPECrate®2017_fp_peak = **955**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Nov 8 14:16:01 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
14:16:01 up 9:20, 1 user, load average: 115.04, 171.29, 182.12
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```
root      tty1      -                05:05      5:18m  1.71s  0.05s  sh
reportable-ic2024.1-lin-sierraforest-rate-20240308.sh
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124634
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124634
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
sh reportable-ic2024.1-lin-sierraforest-rate-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=96 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=96 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6740E
vendor_id       : GenuineIntel
cpu family      : 6
model           : 175
stepping        : 3
microcode       : 0x3000190
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 96
siblings        : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0:  core ids 0-95
physical id 1:  core ids 0-95
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 0: apicids

0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190

physical id 1: apicids

512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 48 bits virtual
Byte Order:                   Little Endian
CPU(s):                       192
On-line CPU(s) list:         0-191
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6740E
BIOS Model name:              Intel(R) Xeon(R) 6740E  CPU @ 2.4GHz
BIOS CPU family:              179
CPU family:                   6
Model:                        175
Thread(s) per core:           1
Core(s) per socket:           96
Socket(s):                    2
Stepping:                     3
Frequency boost:              enabled
CPU(s) scaling MHz:           102%
CPU max MHz:                  2401.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4800.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                               pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                               xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                               cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                               ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                               cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt
                               xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                               cqm_mbm_local split_lock_detect user_shstk avx_vnni lam wbnoinvd
                               dtherm ida arat pln pts umip pku ospke waitpkg gfni vaes vpclmulqdq
                               tme rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                               md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities

L1d cache:                   6 MiB (192 instances)
L1i cache:                   12 MiB (192 instances)
L2 cache:                    192 MiB (48 instances)
L3 cache:                    192 MiB (2 instances)
NUMA node(s):                2
NUMA node0 CPU(s):           0-95

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```

NUMA node1 CPU(s):          96-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:    Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	64K	12M	8	Instruction	1	128	1	64
L2	4M	192M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-95
node 0 size: 515526 MB
node 0 free: 475458 MB
node 1 cpus: 96-191
node 1 size: 515658 MB
node 1 free: 478015 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

9. /proc/meminfo

MemTotal: 1055933384 kB

10. who -r

run-level 3 Nov 8 04:56

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor
nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Date: Nov-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

Platform Notes (Continued)

```

disabled      autofsd autofast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
              chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
              gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load
              lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
              serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
              systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
              systemd-timesyncd udisks2 vncserver@
indirect      systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=18377317-737e-4218-af3f-1dfefc7f1bec
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=371M,high
crashkernel=72M,low

```

14. cpupower frequency-info

```

analyzing CPU 23:
  current policy: frequency should be within 800 MHz and 2.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

19. Disk information

SPEC is set to: /home/CPU2017

```

Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 892G 204G 688G 23% /

```

20. /sys/devices/virtual/dmi/id

```

Vendor: IEIT SYSTEMS
Product: NF5280-M8-A0-R0-00
Product Family: Not specified
Serial: 000000000

```

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
16x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400

```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 00.17.03
BIOS Date: 09/27/2024

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Nov-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-gopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-gopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_fp_base = 939

meta brain NF5280G8 (Intel Xeon 6740E)

SPECrate®2017_fp_peak = 955

CPU2017 License: 3358

Test Date: Nov-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-08 14:16:00-0500.

Report generated on 2025-01-28 22:03:36 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-28.