



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

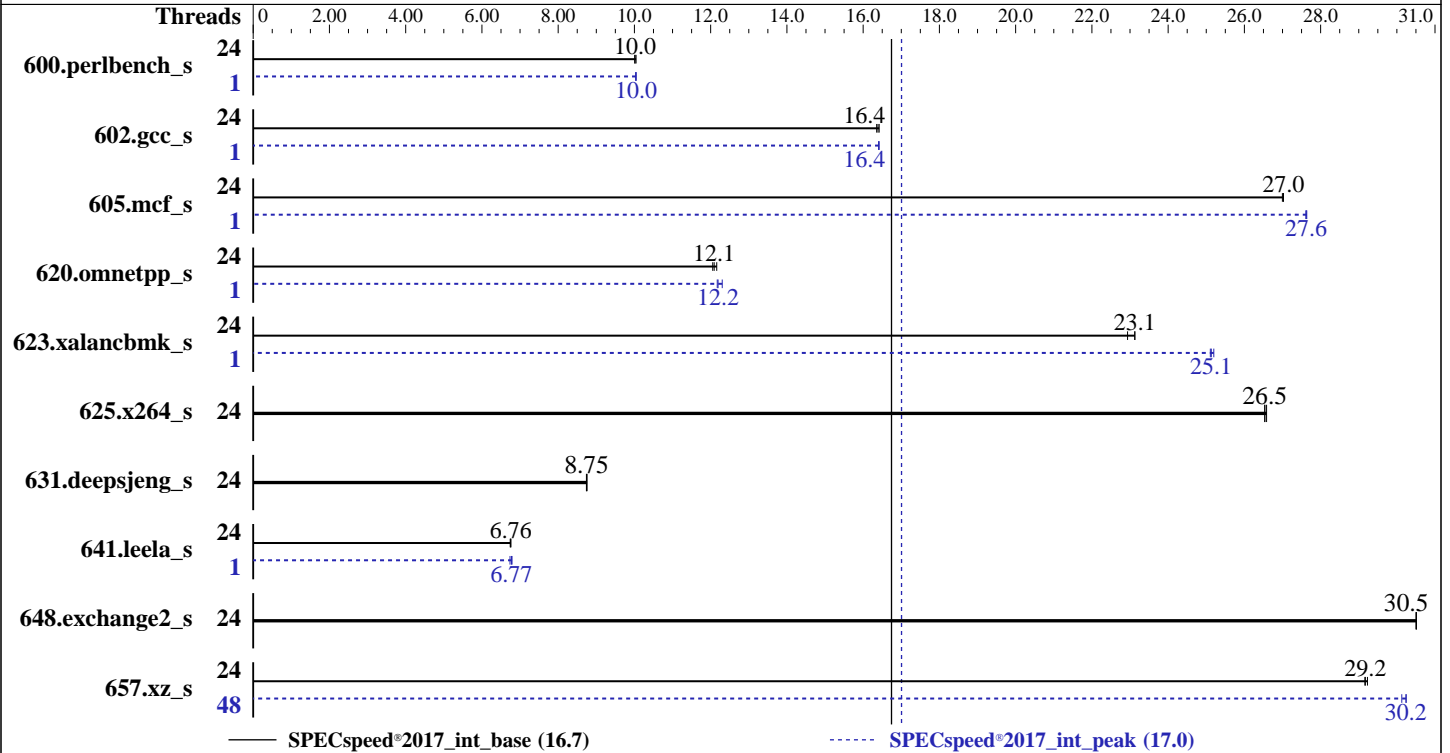

### Hardware

CPU Name: AMD EPYC 9274F  
 Max MHz: 4300  
 Nominal: 4050  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 3 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 1 x 240 GB M.2 SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 kernel version 6.4.0-150600.21-default  
 C/C++/Fortran: Version 5.0.0 of AOCC  
 Compiler: Yes  
 Parallel: Yes  
 Firmware: Version 4.3.6 released Oct-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jan-2025  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	<u>177</u>	<u>10.0</u>	177	10.0	177	10.0	1	177	10.0	177	10.0	<u>177</u>	<u>10.0</u>
602.gcc_s	24	243	16.4	243	16.4	<u>243</u>	<u>16.4</u>	1	243	16.4	243	16.4	<u>243</u>	<u>16.4</u>
605.mcf_s	24	<u>175</u>	<u>27.0</u>	175	27.0	175	27.0	1	171	27.6	171	27.6	<u>171</u>	<u>27.6</u>
620.omnetpp_s	24	134	12.2	<u>135</u>	<u>12.1</u>	135	12.1	1	133	12.3	<u>134</u>	<u>12.2</u>	134	12.2
623.xalancbmk_s	24	<u>61.3</u>	<u>23.1</u>	61.3	23.1	61.8	22.9	1	56.2	25.2	56.4	25.1	<u>56.4</u>	<u>25.1</u>
625.x264_s	24	66.5	26.5	66.4	26.6	<u>66.5</u>	<u>26.5</u>	24	66.5	26.5	66.4	26.6	<u>66.5</u>	<u>26.5</u>
631.deepsjeng_s	24	<u>164</u>	<u>8.75</u>	164	8.76	164	8.74	24	<u>164</u>	<u>8.75</u>	164	8.76	164	8.74
641.leela_s	24	252	6.76	<u>253</u>	<u>6.76</u>	253	6.74	1	<u>252</u>	<u>6.77</u>	253	6.74	251	6.79
648.exchange2_s	24	<u>96.4</u>	<u>30.5</u>	96.4	30.5	96.4	30.5	24	<u>96.4</u>	<u>30.5</u>	96.4	30.5	96.4	30.5
657.xz_s	24	212	29.2	212	29.2	<u>212</u>	<u>29.2</u>	48	205	30.1	204	30.2	<u>204</u>	<u>30.2</u>

SPECspeed®2017\_int\_base = **16.7**

SPECspeed®2017\_int\_peak = **17.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-47"

LD\_LIBRARY\_PATH =

"/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "48"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-47"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS2

Determinism Slider set to Power

DF C-States set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Feb 1 18:05:30 2025

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
18:05:30 up 47 min, 2 users, load average: 0.07, 0.02, 0.00
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    -              18:04    18.00s 1.08s  0.10s  /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094854
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 3094854
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jan-2025  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

### Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py -b intspeerd
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/tempslogs/preenv.intspeerd.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9274F 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size       : 3584 4K pages
cpu cores      : 24
siblings       : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9274F 24-Core Processor
BIOS Model name:      AMD EPYC 9274F 24-Core Processor
BIOS CPU family:      107
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              1
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:    96%
CPU max MHz:           4303.1250

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jan-2025  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

### Platform Notes (Continued)

```

CPU min MHz:          1500.0000
BogoMIPS:             8087.37
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                    amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                    flushbyasid decodeassists pausefilter pfthreshold avic
                    v_ysave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                    ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                    debug_swap
Virtualization:      AMD-V
L1d cache:          768 KiB (24 instances)
L1i cache:          768 KiB (24 instances)
L2 cache:           24 MiB (24 instances)
L3 cache:           256 MiB (8 instances)
NUMA node(s):       2
NUMA node0 CPU(s): 0-11,24-35
NUMA node1 CPU(s): 12-23,36-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability Lltf:                 Not affected
Vulnerability Mds:                   Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:              Not affected
Vulnerability Spec rstack overflow:  Mitigation; Safe RET
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                 Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	768K	8	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 386725 MB
node 0 free: 385809 MB
node 1 cpus: 12-23,36-47

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jan-2025  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

### Platform Notes (Continued)

```
node 1 size: 387015 MB
node 1 free: 385963 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10
```

```
-----
9. /proc/meminfo
   MemTotal:      792310788 kB
```

```
-----
10. who -r
    run-level 3 Feb 1 17:18
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target  Status
    multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
                    issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                    smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                    wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
                    firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid
                    issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
                    munge nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd salt-minion
                    serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter
                    svnservice systemd-boot-check-no-failures systemd-confext systemd-network-generator
                    systemd-nspawn@ systemd-sysextd systemd-time-wait-sync systemd-timesyncd tcsd udisks2
                    virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecret
                    virtstoraged ypbind
    indirect       pcsd systemd-userdbd tftp wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=62bf82ca-659e-4401-8eca-cbfb4d3e5700
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
```

```
-----
14. cpupower frequency-info
    analyzing CPU 36:
    current policy: frequency should be within 1.50 GHz and 4.05 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
    Supported: yes
    Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

### Platform Notes (Continued)

15. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              1
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       1

```

16. /sys/kernel/mm/transparent\_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

19. Disk information

SPEC is set to: /home/cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs 222G  8.1G  210G   4% /home

```

20. /sys/devices/virtual/dmi/id

```

Vendor:      Cisco Systems Inc
Product:     UCSC-C225-M8S
Serial:      WZP28199HWN

```

21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

"DMTF SMBIOS" standard.

Memory:

12x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C225M8.4.3.6.94.1011241558  
BIOS Date: 10/11/2024  
BIOS Revision: 5.27

## Compiler Version Notes

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 648.exchange2\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

```

### C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

```

### Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

602.gcc\_s: Same as 600.perlbench\_s

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlbm -lamdalloc -lflang
```

625.x264\_s: basepeak = yes

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlbm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlbm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9274F 24-Core Processor)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

641.leela\_s (continued):

```
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-01 18:05:29-0500.

Report generated on 2025-02-25 19:05:17 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.