



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 6573


Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Feb-2025

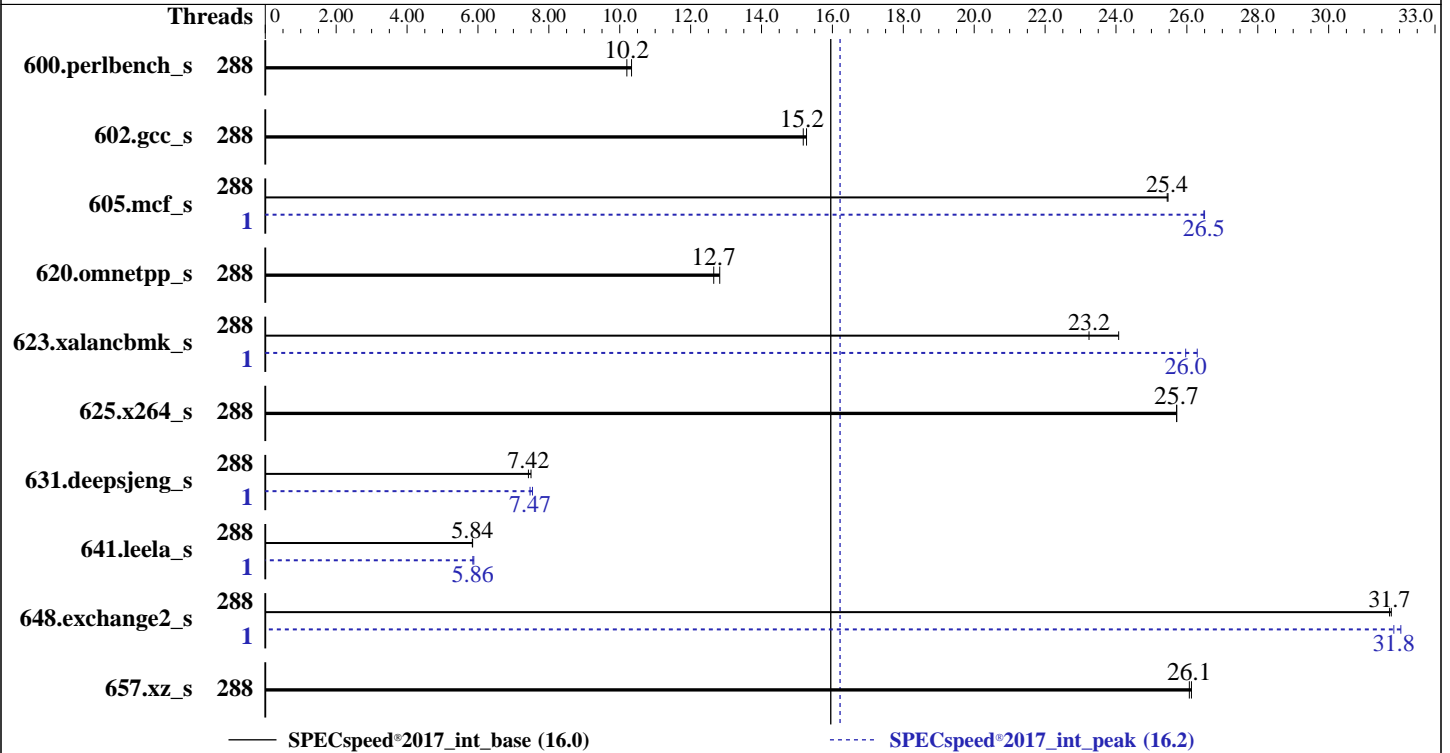

### Hardware

CPU Name: AMD EPYC 9825  
 Max MHz: 3700  
 Nominal: 2200  
 Enabled: 288 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 12 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 150 GB on tmpfs  
 Other: CPU Cooling: DLC

### Software

OS: Ubuntu 24.04.2 LTS  
 6.8.0-53-generic  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.0.0 released Jan-2025  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECSpeed®2017\_int\_peak = 16.2

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Feb-2025

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	288	<b>174</b>	<b>10.2</b>	172	10.3			288	<b>174</b>	<b>10.2</b>	172	10.3		
602.gcc_s	288	261	15.3	<b>262</b>	<b>15.2</b>			288	261	15.3	<b>262</b>	<b>15.2</b>		
605.mcf_s	288	<b>186</b>	<b>25.4</b>	185	25.5			1	178	26.5	<b>178</b>	<b>26.5</b>		
620.omnetpp_s	288	<b>129</b>	<b>12.7</b>	127	12.8			288	<b>129</b>	<b>12.7</b>	127	12.8		
623.xalancbmk_s	288	<b>61.0</b>	<b>23.2</b>	58.9	24.1			1	<b>54.6</b>	<b>26.0</b>	53.9	26.3		
625.x264_s	288	68.6	25.7	<b>68.6</b>	<b>25.7</b>			288	68.6	25.7	<b>68.6</b>	<b>25.7</b>		
631.deepsjeng_s	288	<b>193</b>	<b>7.42</b>	191	7.50			1	190	7.54	<b>192</b>	<b>7.47</b>		
641.leela_s	288	292	5.85	<b>292</b>	<b>5.84</b>			1	290	5.88	<b>291</b>	<b>5.86</b>		
648.exchange2_s	288	<b>92.7</b>	<b>31.7</b>	92.5	31.8			1	<b>92.3</b>	<b>31.8</b>	91.8	32.0		
657.xz_s	288	<b>237</b>	<b>26.1</b>	237	26.1			288	<b>237</b>	<b>26.1</b>	237	26.1		

SPECSpeed®2017\_int\_base = **16.0**

SPECSpeed®2017\_int\_peak = **16.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-287"

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "288"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 150 GB ramdisk created with the cmd: "mount -t tmpfs -o size=150G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Logical Processor : Disabled

Virtualization Technology : Disabled

NUMA Nodes Per Socket : 4

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link Power Management : Disabled

Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual

Determinism Slider : Power Determinism

Optimizer Mode : Enabled

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Platform Notes (Continued)

```

Algorithm Performance Boost Disable : Enabled
                                CPPC : Disabled
Adaptive Allocation : Enabled
Dram Refresh Delay : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

```

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on M772501-M7725 Sun Mar 9 17:53:58 2025

```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.5)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

1. uname -a
Linux M772501-M7725 6.8.0-53-generic #55-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan 17 15:37:52 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux

```

```

2. w
17:53:58 up 9 min, 1 user, load average: 0.08, 0.10, 0.04
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
root     tty1      -              17:45       22.00s     1.29s     0.35s  /bin/bash ./amd_speed_aocc500_znver5_A1.sh

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Platform Notes (Continued)

data(kbytes)	unlimited
stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	2097152
process	6188644
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

### 5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format
html,pdf,txt
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-VERS=6.1a --output_format html,pdf,txt intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-VERS=6.1a --output_format html,pdf,txt --nopower --runmode speed --tune
base:peak --size test:train:refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeerd.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1

```

### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9825 144-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping      : 0
microcode     : 0xb101028
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 144
siblings      : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: apicids
256-267,272-283,288-299,304-315,320-331,336-347,352-363,368-379,384-395,400-411,416-427,432-443
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

### 7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Feb-2025

### Platform Notes (Continued)

```

Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       288
On-line CPU(s) list:         0-287
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              AMD
Model name:                   AMD EPYC 9825 144-Core Processor
BIOS Model name:             AMD EPYC 9825 144-Core Processor           CPU @ 2.2GHz
BIOS CPU family:             107
CPU family:                   26
Model:                        17
Thread(s) per core:          1
Core(s) per socket:          144
Socket(s):                    2
Stepping:                     0
Frequency boost:              enabled
CPU(s) scaling MHz:          101%
CPU max MHz:                  2200.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4393.61
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsavec cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_lld debug_swap

L1d cache:                    13.5 MiB (288 instances)
L1i cache:                    9 MiB (288 instances)
L2 cache:                     288 MiB (288 instances)
L3 cache:                     768 MiB (24 instances)
NUMA node(s):                 8
NUMA node0 CPU(s):            0-35
NUMA node1 CPU(s):            36-71
NUMA node2 CPU(s):            72-107
NUMA node3 CPU(s):            108-143
NUMA node4 CPU(s):            144-179
NUMA node5 CPU(s):            180-215
NUMA node6 CPU(s):            216-251
NUMA node7 CPU(s):            252-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:            Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Mmio stale data:  Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Feb-2025

### Platform Notes (Continued)

Vulnerability Retbleed: Not affected  
 Vulnerability Spec rstack overflow: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	13.5M	12	Data	1	64	1	64
L1i	32K	9M	8	Instruction	1	64	1	64
L2	1M	288M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-35
node 0 size: 192712 MB
node 0 free: 187149 MB
node 1 cpus: 36-71
node 1 size: 193517 MB
node 1 free: 193064 MB
node 2 cpus: 72-107
node 2 size: 193517 MB
node 2 free: 193100 MB
node 3 cpus: 108-143
node 3 size: 193501 MB
node 3 free: 193095 MB
node 4 cpus: 144-179
node 4 size: 193517 MB
node 4 free: 193215 MB
node 5 cpus: 180-215
node 5 size: 193517 MB
node 5 free: 191882 MB
node 6 cpus: 216-251
node 6 size: 193517 MB
node 6 free: 193108 MB
node 7 cpus: 252-287
node 7 size: 193431 MB
node 7 free: 193044 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10
```

9. /proc/meminfo

MemTotal: 1584367740 kB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Feb-2025

### Platform Notes (Continued)

10. who -r  
run-level 3 Mar 9 17:45

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/vmlinuz-6.8.0-53-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv  
ro

14. cpupower frequency-info  
analyzing CPU 76:  
current policy: frequency should be within 1.50 GHz and 2.20 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2200MHz

15. tuned-adm active  
Current active profile: latency-performance

kernel.sysctl	
kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	3
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

### Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     1
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.2 LTS

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs 150G  3.3G 147G   3% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge M7725
Product Family: PowerEdge
Serial:      M772501

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
13x 80AD000080AD HMC94AHBRA277N 64 GB 2 rank 6400
11x 80AD000080AD HMC94AHBRA480N 64 GB 2 rank 6400

```

23. BIOS

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Feb-2025

## Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.0.0  
BIOS Date: 01/23/2025  
BIOS Revision: 1.0

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

### C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-DSPEC\_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Peak Optimization Flags (Continued)

605.mcf\_s (continued):

-lamdlibm -lamdalloc -lflang

625.x264\_s: basepeak = yes

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=100 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp

-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=100 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela\_s: Same as 631.deepsjeng\_s

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4

-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM

-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost

-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp

-lomp -lamdlibm -lamdalloc -lflang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECspeed®2017\_int\_base = 16.0

PowerEdge M7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-09 13:53:58-0400.

Report generated on 2025-03-26 10:35:13 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.