



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

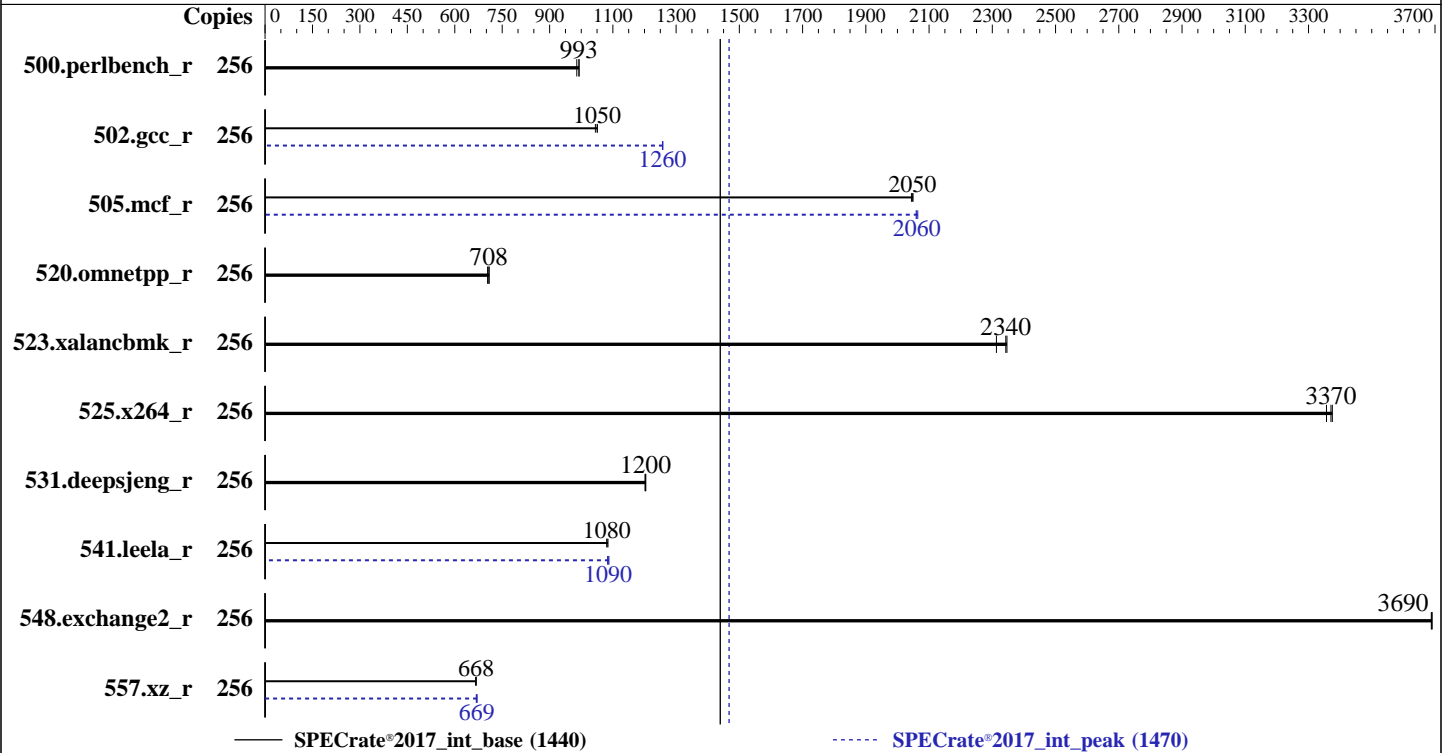

Hardware

CPU Name: AMD EPYC 9535
 Max MHz: 4300
 Nominal: 2400
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 4 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
 Storage: 1 x 1.92 TB M.2 NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version QGE133I 7.20 released Feb-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	410	993	411	993	413	986	256	410	993	411	993	413	986
502.gcc_r	256	347	1040	345	1050	345	1050	256	288	1260	288	1260	288	1260
505.mcf_r	256	202	2040	202	2050	202	2050	256	200	2060	201	2060	201	2060
520.omnetpp_r	256	475	708	477	704	474	709	256	475	708	477	704	474	709
523.xalancbmk_r	256	115	2350	117	2310	115	2340	256	115	2350	117	2310	115	2340
525.x264_r	256	134	3360	133	3380	133	3370	256	134	3360	133	3380	133	3370
531.deepsjeng_r	256	244	1200	244	1200	244	1200	256	244	1200	244	1200	244	1200
541.leela_r	256	392	1080	391	1080	392	1080	256	391	1080	391	1090	390	1090
548.exchange2_r	256	182	3690	182	3690	182	3690	256	182	3690	182	3690	182	3690
557.xz_r	256	414	668	415	666	414	668	256	413	669	412	671	414	668

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd
-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
P-State set to Enabled
NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Mar 1 18:57:07 2025
```

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

Platform Notes (Continued)

1. `uname -a`
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36cle09)
x86_64 x86_64 x86_64 GNU/Linux

2. `w`
18:57:07 up 5:02, 1 user, load average: 63.80, 192.82, 231.44
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. `ulimit -a`
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3093738
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3093738
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run025-compliant-amd-rateint.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.272/templogs/preenv.intrate.272.0.log --lognum 272.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

6. `/proc/cpuinfo`
model name : AMD EPYC 9535 64-Core Processor
vendor_id : AuthenticAMD
cpu family : 26
model : 2
stepping : 1
microcode : 0xb00211a
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

TLB size      : 192 4K pages
cpu cores     : 64
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids
0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
physical id 1: core ids
0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
physical id 0: apicids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
64-471,480-487,496-503

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9535 64-Core Processor
BIOS Model name:      AMD EPYC 9535 64-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:   103%
CPU max MHz:           2400.0000
CPU min MHz:           1500.0000
BogoMIPS:              4793.02
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

Virtualization:
Lld cache:
L1i cache:
L2 cache:
L3 cache:
NUMA node(s):
NUMA node0 CPU(s):
NUMA node1 CPU(s):
NUMA node2 CPU(s):
NUMA node3 CPU(s):
NUMA node4 CPU(s):
NUMA node5 CPU(s):
NUMA node6 CPU(s):
NUMA node7 CPU(s):
Vulnerability Gather data sampling:
Vulnerability Itlb multihit:
Vulnerability Lltf:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Mmio stale data:
Vulnerability Reg file data sampling:
Vulnerability Retbleed:
Vulnerability Spec rstack overflow:
Vulnerability Spec store bypass:
Vulnerability Spectre v1:
Vulnerability Spectre v2:

Vulnerability Srbds:
Vulnerability Tsx async abort:

```

avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_llid debug_swap
AMD-V
6 MiB (128 instances)
4 MiB (128 instances)
128 MiB (128 instances)
512 MiB (32 instances)
8
0-15,128-143
16-31,144-159
32-47,160-175
48-63,176-191
64-79,192-207
80-95,208-223
96-111,224-239
112-127,240-255
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Mitigation; Speculative Store Bypass disabled via prctl
Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Not affected
Not affected

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d    48K      6M    12 Data             1     64     1           64
L1i    32K      4M     8 Instruction       1     64     1           64
L2     1M     128M   16 Unified          2    1024     1           64
L3     16M     512M   16 Unified          3   16384     1           64

```

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-15,128-143
node 0 size: 96334 MB
node 0 free: 95092 MB
node 1 cpus: 16-31,144-159
node 1 size: 96759 MB
node 1 free: 95651 MB
node 2 cpus: 32-47,160-175
node 2 size: 96759 MB
node 2 free: 95642 MB
node 3 cpus: 48-63,176-191
node 3 size: 96759 MB
node 3 free: 95657 MB
node 4 cpus: 64-79,192-207
node 4 size: 96759 MB
node 4 free: 95634 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

node 5 cpus: 80-95,208-223
node 5 size: 96721 MB
node 5 free: 95604 MB
node 6 cpus: 96-111,224-239
node 6 size: 96759 MB
node 6 free: 95612 MB
node 7 cpus: 112-127,240-255
node 7 size: 96607 MB
node 7 free: 95488 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:      792024124 kB

```

```

10. who -r
    run-level 3 Mar 1 13:55

```

```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target  Status
    multi-user      running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd-generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated ntp_sync
indirect systemd-userdbd uidd wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=240b751b-cc96-4bc0-bc79-208919660c0a
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

14. cpupower frequency-info
analyzing CPU 163:
  current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme1n1p3  xfs   1.8T  93G  1.7T   6% /

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id

Vendor: Lenovo
Product: ThinkSystem SR675 V3 System Board
Product Family: ThinkSystem
Serial: None

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMC88AHBRA471N 32 GB 2 rank 6400, configured at 6000
2x SK Hynix HMC88AHBRA472N 32 GB 2 rank 6400, configured at 6000
10x SK Hynix HMC88AHBRA478N 32 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: QGE133I-7.20
BIOS Date: 02/05/2025
BIOS Revision: 7.20
Firmware Revision: 9.10

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

Compiler Version Notes (Continued)

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand

-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 1440

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = 1470

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

541.leela_r (continued):

```
-mllvm -do-block-reorder=advanced -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-01 05:57:06-0500.

Report generated on 2025-03-26 10:36:19 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.