



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573


Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jun-2024

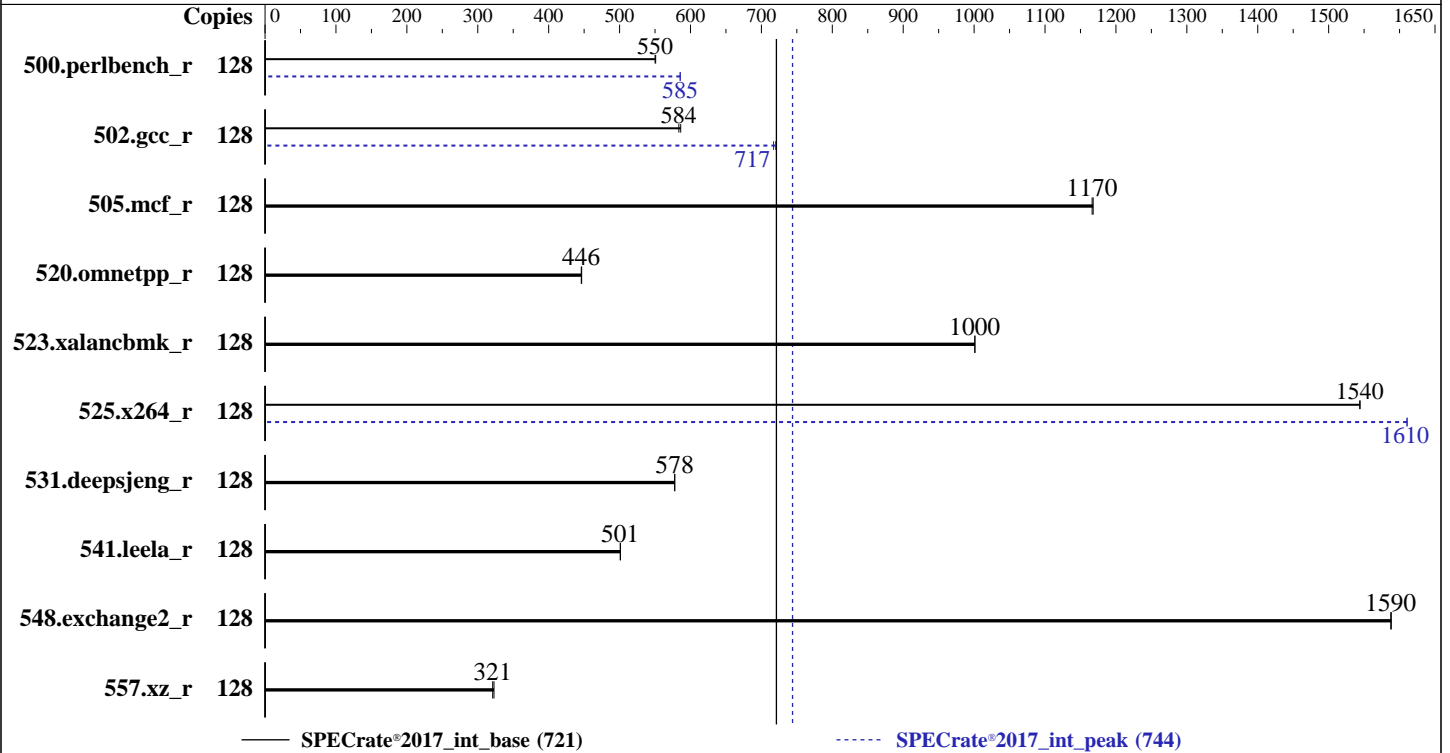

Hardware

CPU Name: Intel Xeon 6730P
 Max MHz: 3800
 Nominal: 2500
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 288 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 80 GB on tmpfs
 Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 1.2.6 released Feb-2025
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	370	551	370	550			128	348	586	348	585		
502.gcc_r	128	309	586	311	584			128	253	717	252	720		
505.mcf_r	128	177	1170	177	1170			128	177	1170	177	1170		
520.omnetpp_r	128	376	447	377	446			128	376	447	377	446		
523.xalancbmk_r	128	135	1000	135	1000			128	135	1000	135	1000		
525.x264_r	128	145	1540	145	1540			128	139	1610	139	1610		
531.deepsjeng_r	128	254	578	254	578			128	254	578	254	578		
541.leela_r	128	423	501	423	501			128	423	501	423	501		
548.exchange2_r	128	211	1590	211	1590			128	211	1590	211	1590		
557.xz_r	128	431	321	428	323			128	431	321	428	323		

SPECrate®2017_int_base = 721

SPECrate®2017_int_peak = 744

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

```

Adjacent Cache Line Prefetch : Disabled
DCU Streamer Prefetcher : Disabled
Sub NUMA Cluster : Enabled
MADT Core Enumeration : Linear
XPT Prefetch : Disabled
LLC Prefetch : Enabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
CIE : Disabled
C-States : Autonomous
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance
CPU Interconnect Bus -
Link Power Management : Disabled
PCI ASPM L1 Link Power Management : Disabled
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 1234567-R670 Sat Mar 8 22:55:10 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux 1234567-R670 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36cle09/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
22:55:10 up 14 min, 1 user, load average: 0.12, 0.05, 0.02
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    -             22:49   30.00s 0.89s  0.00s  /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format html,pdf,txt
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2062064
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2062064
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format
html,pdf,txt
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-VERS=6.1a --output_format html,pdf,txt intrate
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-VERS=6.1a --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
refrate intrate --nopreenv --note-preenv --logfile $$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $$SPEC/bin/sysinfo
$$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6730P
vendor_id      : GenuineIntel
cpu family     : 6
model         : 173
stepping      : 1
microcode     : 0x1000380
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-15,64-79
physical id 1: core ids 0-15,64-79
physical id 0: apicids 0-31,128-159
physical id 1: apicids 256-287,384-415
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel
Model name:            Intel(R) Xeon(R) 6730P
BIOS Model name:       Intel(R) Xeon(R) 6730P CPU @ 2.5GHz
BIOS CPU family:       179
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
Stepping:              1
BogoMIPS:              5000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpoptdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd frsm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 4 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 576 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	288M	576M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128579 MB
node 0 free: 127883 MB
node 1 cpus: 16-31,80-95
node 1 size: 129015 MB
node 1 free: 118308 MB
node 2 cpus: 32-47,96-111
node 2 size: 129015 MB
node 2 free: 127514 MB
node 3 cpus: 48-63,112-127
node 3 size: 128975 MB
node 3 free: 127933 MB
node distances:
node 0 1 2 3
0: 10 12 21 21

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10
```

```
-----
9. /proc/meminfo
MemTotal: 527960292 kB
```

```
-----
10. who -r
run-level 3 Mar 8 22:41
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd cron
display-manager firewalld getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor
nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernel rollback rsyslog
smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
wpa_supplicant
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd
autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd
console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables
exchange-bmc-os-info fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap
nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=f6b7b82f-7376-4741-aad6-a16a8014b2fb
splash=silent
resume=/dev/disk/by-uuid/3bfae0e2-56ee-4845-bdbe-561ecf485c49
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 58:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```

vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 80G   5.0G   76G   7% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge R670
Product Family: PowerEdge
Serial:         1234567

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
3x 002C069D002C MTC20F2085S1RC64BD1 USFF 32 GB 2 rank 6400

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

6x 00AD063200AD HMC888AHBRA292N 32 GB 2 rank 6400
7x 00CE063200CE M321R4GA3PB1-CCPPC 32 GB 2 rank 6400

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.2.6
BIOS Date: 02/26/2025
BIOS Revision: 1.2

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 721

PowerEdge R670 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 744

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-08 09:55:09-0500.

Report generated on 2025-03-28 09:23:01 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-27.