



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 20.2

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_peak = 20.7

CPU2017 License: 9017


Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

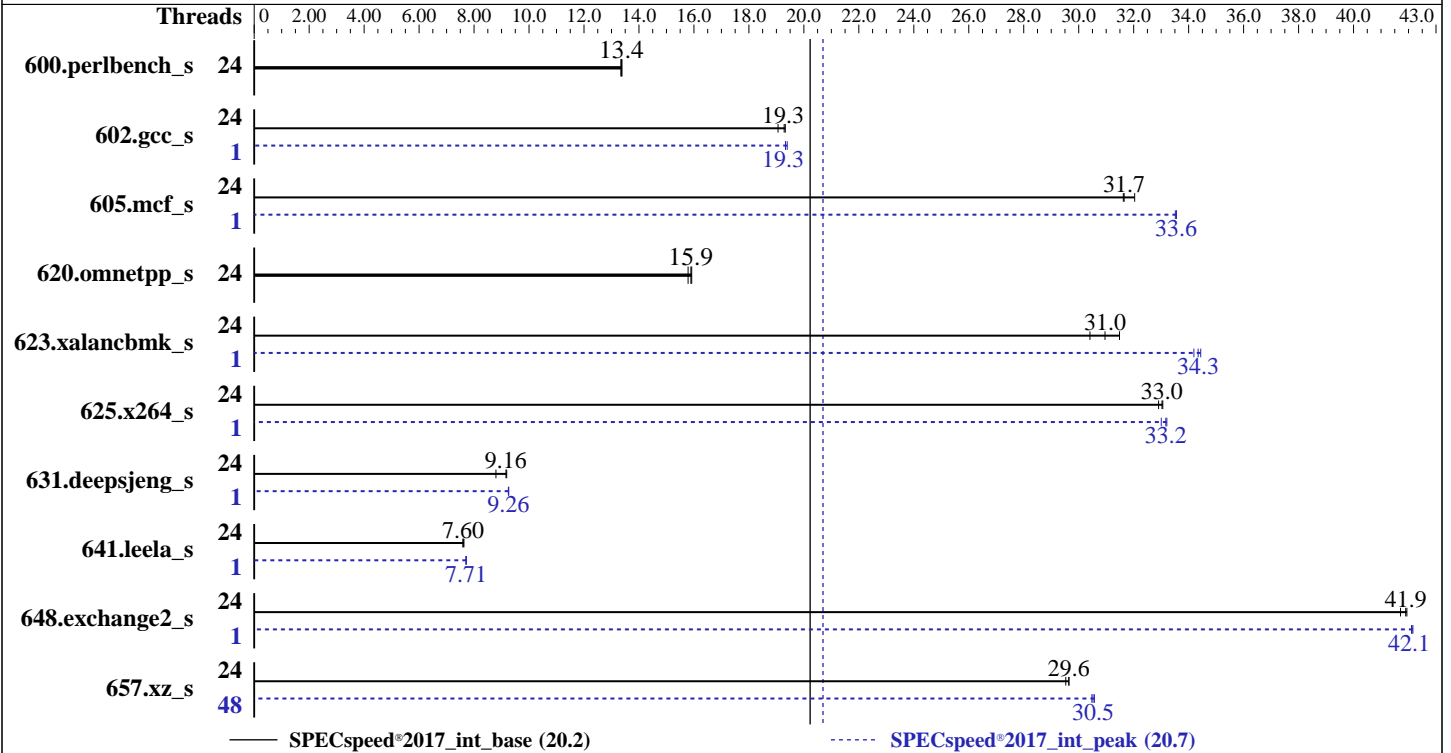

### Hardware

CPU Name: AMD EPYC 9275F  
 Max MHz: 4800  
 Nominal: 4100  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 3 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version KAE131I 5.30 released Dec-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	133	13.4	133	13.3	<b>133</b>	<b>13.4</b>	24	133	13.4	133	13.3	<b>133</b>	<b>13.4</b>
602.gcc_s	24	<b>206</b>	<b>19.3</b>	206	19.3	209	19.1	1	206	19.3	<b>206</b>	<b>19.3</b>	205	19.4
605.mcf_s	24	147	32.0	149	31.6	<b>149</b>	<b>31.7</b>	1	141	33.5	<b>141</b>	<b>33.6</b>	141	33.6
620.omnetpp_s	24	103	15.8	102	15.9	<b>103</b>	<b>15.9</b>	24	103	15.8	102	15.9	<b>103</b>	<b>15.9</b>
623.xalancbmk_s	24	45.0	31.5	<b>45.8</b>	<b>31.0</b>	46.6	30.4	1	41.1	34.4	<b>41.3</b>	<b>34.3</b>	41.4	34.2
625.x264_s	24	53.4	33.1	<b>53.4</b>	<b>33.0</b>	53.6	32.9	1	53.4	33.0	<b>53.2</b>	<b>33.2</b>	53.1	33.2
631.deepsjeng_s	24	163	8.80	156	9.19	<b>156</b>	<b>9.16</b>	1	155	9.25	155	9.26	<b>155</b>	<b>9.26</b>
641.leela_s	24	<b>224</b>	<b>7.60</b>	224	7.63	225	7.60	1	<b>221</b>	<b>7.71</b>	221	7.70	221	7.72
648.exchange2_s	24	70.5	41.7	<b>70.2</b>	<b>41.9</b>	70.1	41.9	1	<b>69.8</b>	<b>42.1</b>	69.8	42.1	69.7	42.2
657.xz_s	24	209	29.6	<b>209</b>	<b>29.6</b>	209	29.5	48	<b>203</b>	<b>30.5</b>	202	30.6	203	30.5

SPECspeed®2017\_int\_base = **20.2**

SPECspeed®2017\_int\_peak = **20.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "48"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Feb 26 15:59:48 2025
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:59:48 up 3 min, 1 user, load average: 0.04, 0.11, 0.05
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 1546066
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 1546066
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.349/templogs/preenv.intspeerd.349.0.log --lognum 349.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9275F 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping      : 1
microcode     : 0xb00211a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 24
siblings      : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9275F 24-Core Processor
BIOS Model name:      AMD EPYC 9275F 24-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             1
Stepping:              1

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

BogoMIPS:                8187.14
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                          rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                          extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                          sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                          cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                          osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
                          perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                          ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                          smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                          xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                          xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                          nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                          pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                          avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                          avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                          movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                          flush_llid debug_swap
Virtualization:          AMD-V
L1d cache:              1.1 MiB (24 instances)
L1i cache:              768 KiB (24 instances)
L2 cache:               24 MiB (24 instances)
L3 cache:               256 MiB (8 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-5,24-29
NUMA node1 CPU(s):     6-11,30-35
NUMA node2 CPU(s):     12-17,36-41
NUMA node3 CPU(s):     18-23,42-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                      always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 96349 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

node 0 free: 95927 MB
node 1 cpus: 6-11,30-35
node 1 size: 96726 MB
node 1 free: 96409 MB
node 2 cpus: 12-17,36-41
node 2 size: 96764 MB
node 2 free: 96354 MB
node 3 cpus: 18-23,42-47
node 3 size: 96702 MB
node 3 free: 96275 MB
node distances:
node  0  1  2  3
  0:  10  12  12  12
  1:  12  10  12  12
  2:  12  12  10  12
  3:  12  12  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:      395819844 kB

```

```

-----
10. who -r
    run-level 3 Feb 26 15:57

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd
generated ntp_sync
indirect systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=3343ae15-d2b7-40ed-b7cb-d367d374e720
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
    analyzing CPU 42:
    Unable to determine current policy

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 20.2

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_peak = 20.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

### Platform Notes (Continued)

boost state support:  
Supported: yes  
Active: yes

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   446G  45G  401G  11% /

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR655 V3
Product Family: ThinkSystem
Serial:          1234567890

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

6x SK Hynix HMCG88AHBRA477N 32 GB 2 rank 6400, configured at 6000  
6x SK Hynix HMCG88AHBRA478N 32 GB 2 rank 6400, configured at 6000

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: KAE131I-5.30  
BIOS Date: 12/17/2024  
BIOS Revision: 5.30  
Firmware Revision: 54.6

## Compiler Version Notes

```
=====  
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
| 657.xz_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
| 641.leela_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

## Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 20.2

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_peak = 20.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 20.2

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264\_s: Same as 602.gcc\_s

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

631.deepsjeng\_s (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela\_s: Same as 631.deepsjeng\_s

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_int\_base = 20.2

SPECspeed®2017\_int\_peak = 20.7

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-26 02:59:48-0500.  
Report generated on 2025-03-26 10:36:50 by CPU2017 PDF formatter v6716.  
Originally published on 2025-03-25.