



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

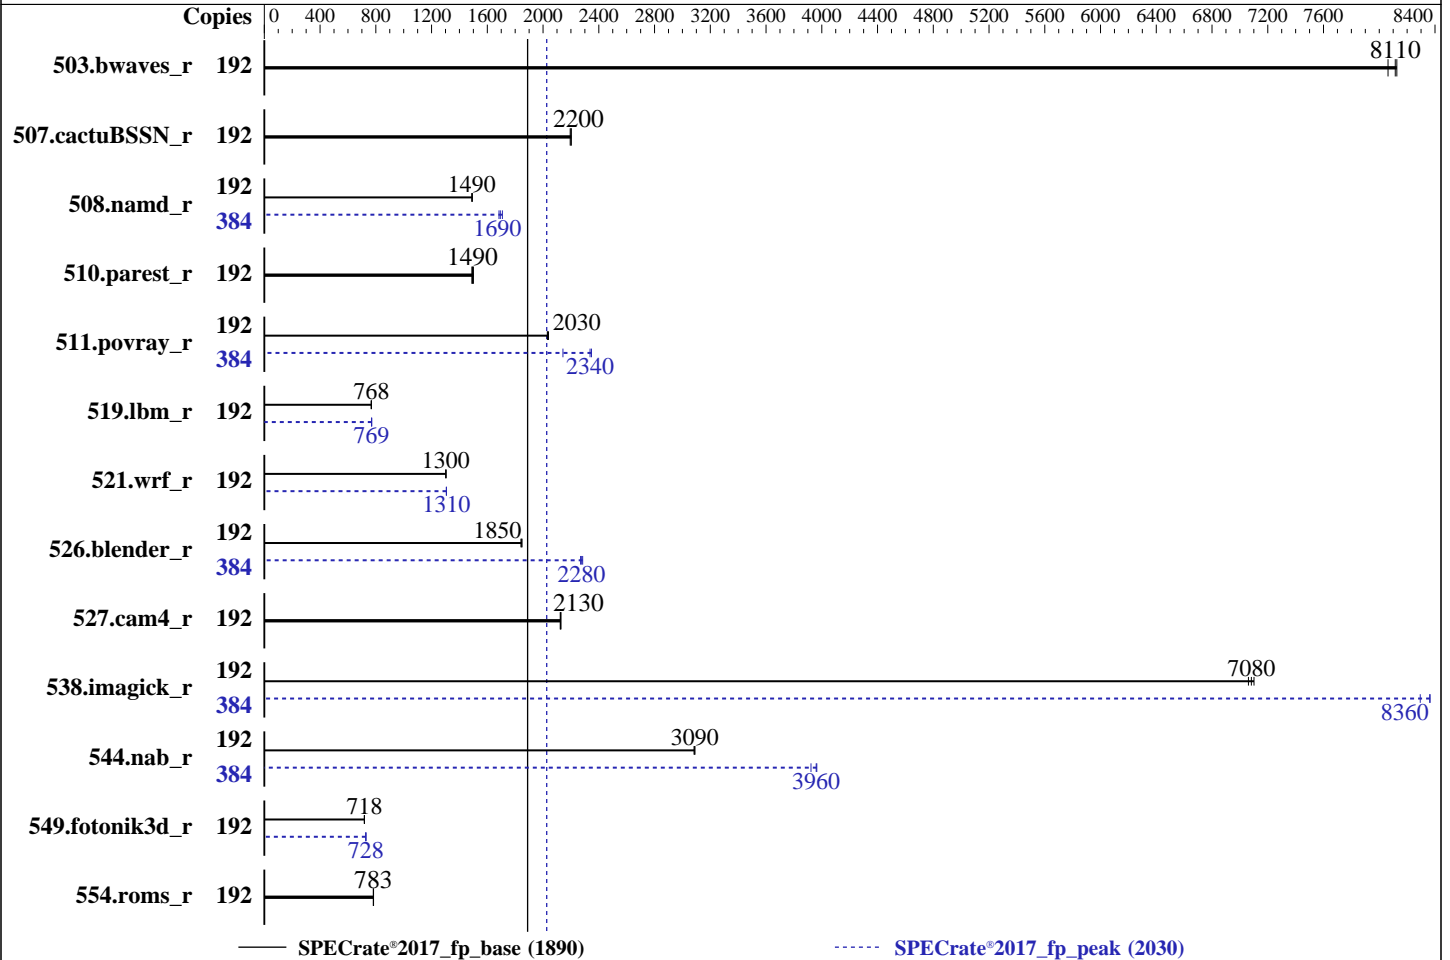

### Hardware

CPU Name: AMD EPYC 9645  
 Max MHz: 3700  
 Nominal: 2300  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 12 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)  
 Storage: 1 x 1.92 TB M.2 NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version QGE1331 7.20 released Feb-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	239	8060	<u>237</u>	<u>8110</u>	237	8130	192	239	8060	<u>237</u>	<u>8110</u>	237	8130
507.cactuBSSN_r	192	111	2190	110	2200	<u>110</u>	<u>2200</u>	192	111	2190	110	2200	<u>110</u>	<u>2200</u>
508.namd_r	192	122	1490	<u>122</u>	<u>1490</u>	122	1490	384	214	1710	<u>215</u>	<u>1690</u>	217	1680
510.parest_r	192	335	1500	337	1490	<u>336</u>	<u>1490</u>	192	335	1500	337	1490	<u>336</u>	<u>1490</u>
511.povray_r	192	221	2030	<u>221</u>	<u>2030</u>	220	2040	384	382	2350	418	2140	<u>384</u>	<u>2340</u>
519.lbm_r	192	263	768	<u>263</u>	<u>768</u>	264	767	192	262	771	263	769	<u>263</u>	<u>769</u>
521.wrf_r	192	<u>330</u>	<u>1300</u>	330	1300	330	1300	192	329	1310	329	1310	<u>329</u>	<u>1310</u>
526.blender_r	192	159	1840	158	1850	<u>158</u>	<u>1850</u>	384	258	2270	<u>257</u>	<u>2280</u>	256	2280
527.cam4_r	192	158	2130	<u>158</u>	<u>2130</u>	158	2120	192	158	2130	<u>158</u>	<u>2130</u>	158	2120
538.imagick_r	192	67.6	7060	<u>67.4</u>	<u>7080</u>	67.2	7100	384	114	8360	<u>114</u>	<u>8360</u>	115	8290
544.nab_r	192	105	3080	<u>105</u>	<u>3090</u>	105	3090	384	165	3920	<u>163</u>	<u>3960</u>	163	3960
549.fotonik3d_r	192	1042	718	<u>1042</u>	<u>718</u>	1042	718	192	<u>1027</u>	<u>728</u>	1027	728	1027	728
554.roms_r	192	<u>390</u>	<u>783</u>	390	782	389	784	192	<u>390</u>	<u>783</u>	390	782	389	784

SPECrate®2017\_fp\_base = **1890**

SPECrate®2017\_fp\_peak = **2030**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

cpupower set to performance mode

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Operating System Notes (Continued)

```
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd
-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
P-State set to Enabled  
NUMA Nodes per Socket set to NPS4  
L1 Stride Prefetcher set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Mar 23 13:06:31 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
13:06:31 up 3 min, 1 user, load average: 0.29, 0.24, 0.10
USER      TTY      FROM          LOGIN@      IDLE       JCPU      PCPU      WHAT
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093343
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093343
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.488/temlogs/preenv.fprate.488.0.log --lognum 488.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 1890

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Date: Mar-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

### Platform Notes (Continued)

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9645 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101025
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 96
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 0: apicids 0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247
physical id 1: apicids 256-279,288-311,320-343,352-375,384-407,416-439,448-471,480-503
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----

```

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9645 96-Core Processor
BIOS Model name:      AMD EPYC 9645 96-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             2
Stepping:              0
Frequency boost:      enabled
CPU(s) scaling MHz:   101%
CPU max MHz:           2300.0000
CPU min MHz:           1500.0000
BogoMIPS:              4593.16
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
-----

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf  
xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnni  
avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_llid debug\_swap

Virtualization: AMD-V

L1d cache: 9 MiB (192 instances)  
L1i cache: 6 MiB (192 instances)  
L2 cache: 192 MiB (192 instances)  
L3 cache: 512 MiB (16 instances)

NUMA node(s): 8  
NUMA node0 CPU(s): 0-23,192-215  
NUMA node1 CPU(s): 24-47,216-239  
NUMA node2 CPU(s): 48-71,240-263  
NUMA node3 CPU(s): 72-95,264-287  
NUMA node4 CPU(s): 96-119,288-311  
NUMA node5 CPU(s): 120-143,312-335  
NUMA node6 CPU(s): 144-167,336-359  
NUMA node7 CPU(s): 168-191,360-383

Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; userscopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBSB-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0-23,192-215  
node 0 size: 96268 MB  
node 0 free: 95584 MB  
node 1 cpus: 24-47,216-239  
node 1 size: 96755 MB  
node 1 free: 96129 MB  
node 2 cpus: 48-71,240-263  
node 2 size: 96716 MB  
node 2 free: 96035 MB  
node 3 cpus: 72-95,264-287  
node 3 size: 96755 MB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

node 3 free: 96151 MB
node 4 cpus: 96-119,288-311
node 4 size: 96755 MB
node 4 free: 96326 MB
node 5 cpus: 120-143,312-335
node 5 size: 96755 MB
node 5 free: 96328 MB
node 6 cpus: 144-167,336-359
node 6 size: 96755 MB
node 6 free: 96327 MB
node 7 cpus: 168-191,360-383
node 7 size: 96599 MB
node 7 free: 96155 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:          791922824 kB

```

```

10. who -r
    run-level 3 Mar 23 13:03

```

```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofsd autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd-generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated ntp_sync
indirect systemd-userdbd uidd wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=240b751b-cc96-4bc0-bc79-208919660c0a
splash=silent

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

### Platform Notes (Continued)

```
mitigations=auto
quiet
security=apparmor
```

-----  
14. cpupower frequency-info

```
analyzing CPU 66:
  current policy: frequency should be within 1.50 GHz and 2.30 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

-----  
15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

-----  
18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

-----  
19. Disk information

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0nlp3	xfs	1.8T	95G	1.7T	6%	/

-----  
20. /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
Product:     ThinkSystem SR675 V3 System Board
Product Family: ThinkSystem
Serial:      None
```

-----  
21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
12x SK Hynix HMC88AHBRA471N 32 GB 2 rank 6400, configured at 6000
2x SK Hynix HMC88AHBRA472N 32 GB 2 rank 6400, configured at 6000
10x SK Hynix HMC88AHBRA478N 32 GB 2 rank 6400, configured at 6000
```

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Lenovo
BIOS Version:     QGE133I-7.20
BIOS Date:        02/05/2025
BIOS Revision:    7.20
Firmware Revision: 9.10
```

## Compiler Version Notes

=====
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

=====
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

=====
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Oct-2024

### Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 1890

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_peak = 2030

CPU2017 License: 9017

Test Date: Mar-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

508.namd\_r (continued):

```
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14  
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false  
-Wl, -mllvm -Wl, -extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 1890

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017

**Test Date:** Mar-2025

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2025

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2024

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-mllvm -loop-unswitch-threshold=200000 -lamdlibm  
-lamdalloc -ldl
```

526.blender\_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_fp\_base = 1890

SPECrate®2017\_fp\_peak = 2030

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-23 01:06:31-0400.

Report generated on 2025-04-09 14:59:39 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.