



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: May-2025

Software Availability: Jun-2024

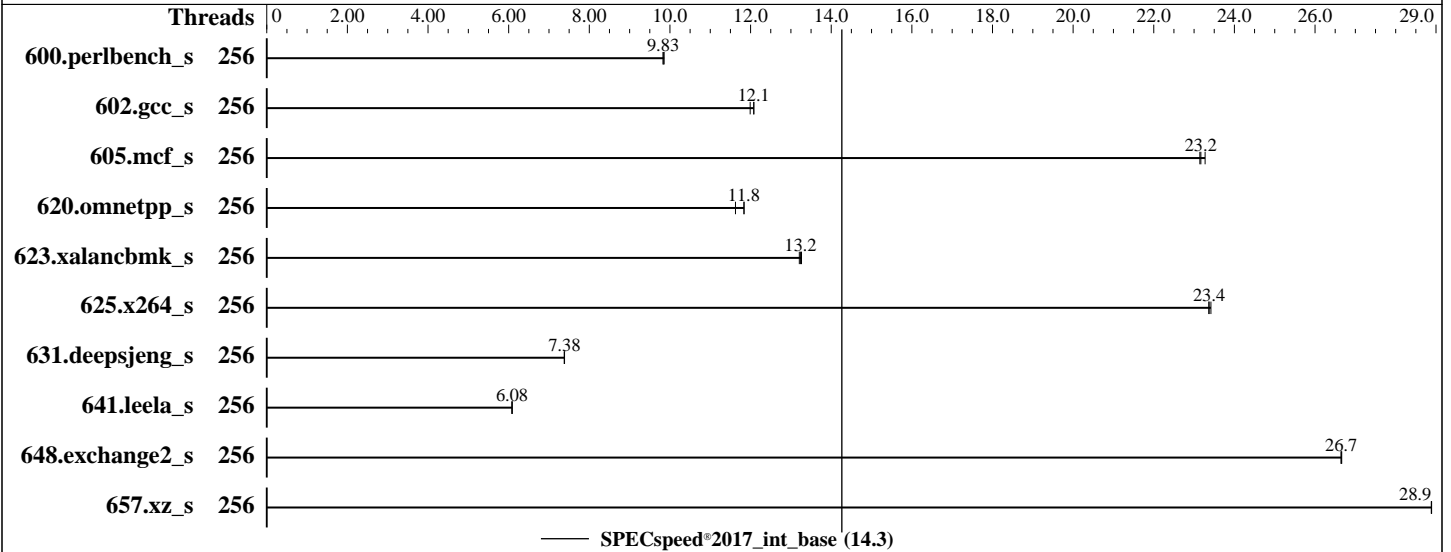

Hardware

CPU Name: Intel Xeon 6767P
 Max MHz: 3900
 Nominal: 2400
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 336 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-88/64B-H, running at 8000)
 Storage: 1 x 960 GB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version IHE109T 1.20 released Feb-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: May-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	256	181	9.83	<u>181</u>	<u>9.83</u>	180	9.86									
602.gcc_s	256	<u>330</u>	<u>12.1</u>	330	12.1	332	12.0									
605.mcf_s	256	203	23.3	204	23.1	<u>204</u>	<u>23.2</u>									
620.omnetpp_s	256	138	11.8	140	11.6	<u>138</u>	<u>11.8</u>									
623.xalancbmk_s	256	107	13.3	107	13.2	<u>107</u>	<u>13.2</u>									
625.x264_s	256	75.3	23.4	75.5	23.4	<u>75.5</u>	<u>23.4</u>									
631.deepsjeng_s	256	194	7.38	<u>194</u>	<u>7.38</u>	194	7.38									
641.leela_s	256	280	6.08	<u>280</u>	<u>6.08</u>	280	6.08									
648.exchange2_s	256	<u>110</u>	<u>26.7</u>	110	26.6	110	26.7									
657.xz_s	256	<u>214</u>	<u>28.9</u>	214	28.9	214	28.9									

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: May-2025

Software Availability: Jun-2024

Platform Notes

BIOS configuration:
Workload Profile set to General Computing - Peak Frequency
SNC set to Enabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Mar 12 10:44:34 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
10:44:34 up 3 min, 1 user, load average: 1.43, 2.54, 1.19
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2062514
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: May-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```

open files                (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 2062514
virtual memory            (kbytes, -v) unlimited
file locks                 (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPEccpu_1.01.sh
sh Run542-compliant-ic2024.1-lin-sapphirerapids-speedint-base-smt-on-20240308.sh
runccpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runccpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.031/templogs/preenv.intspeed.031.0.log --lognum 031.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6767P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 1: core ids 0-31,64-95
physical id 0: apicids 0-63,128-191
physical id 1: apicids 256-319,384-447

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             GenuineIntel

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

Platform Notes (Continued)

```

BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6767P
BIOS Model name: Intel(R) Xeon(R) 6767P UNKNOWN CPU @ 2.4GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
Stepping: 1
BogoMIPS: 4800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b engcmd frsm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 6 MiB (128 instances)
L1i cache: 8 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 672 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-31,128-159
NUMA node1 CPU(s): 32-63,160-191
NUMA node2 CPU(s): 64-95,192-223
NUMA node3 CPU(s): 96-127,224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	64K	8M	16	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

Platform Notes (Continued)

L2	2M	256M	16 Unified	2	2048	1	64
L3	336M	672M	16 Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 128751 MB
node 0 free: 127996 MB
node 1 cpus: 32-63,160-191
node 1 size: 129007 MB
node 1 free: 128372 MB
node 2 cpus: 64-95,192-223
node 2 size: 129007 MB
node 2 free: 128491 MB
node 3 cpus: 96-127,224-255
node 3 size: 128889 MB
node 3 free: 128258 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 528030812 kB

10. who -r

run-level 3 Mar 12 10:42

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=8c76b9eb-7cab-4e58-a0ba-c4f6030335e5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: May-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 13:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: May-2025
Software Availability: Jun-2024

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	xfs	893G	83G	811G	10%	/

```

20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:    ThinkSystem SR650 V4
Product Family: ThinkSystem
Serial:     0987654321

```

```

21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
5x SK Hynix HMC88BDJHA380N 32 GB 2 rank 8800, configured at 8000
5x SK Hynix HMC88BDJHA383N 32 GB 2 rank 8800, configured at 8000
6x SK Hynix HMC88BDJHA462N 32 GB 2 rank 8800, configured at 8000

```

```

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     IHE109T-1.20
BIOS Date:        02/28/2025
BIOS Revision:    1.20
Firmware Revision: 1.20

```

Compiler Version Notes

```

=====
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
C++   | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran | 648.exchange2_s(base)
=====

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```




SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2025

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: May-2025

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-11 22:44:33-0400.

Report generated on 2025-04-09 15:00:17 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.