



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

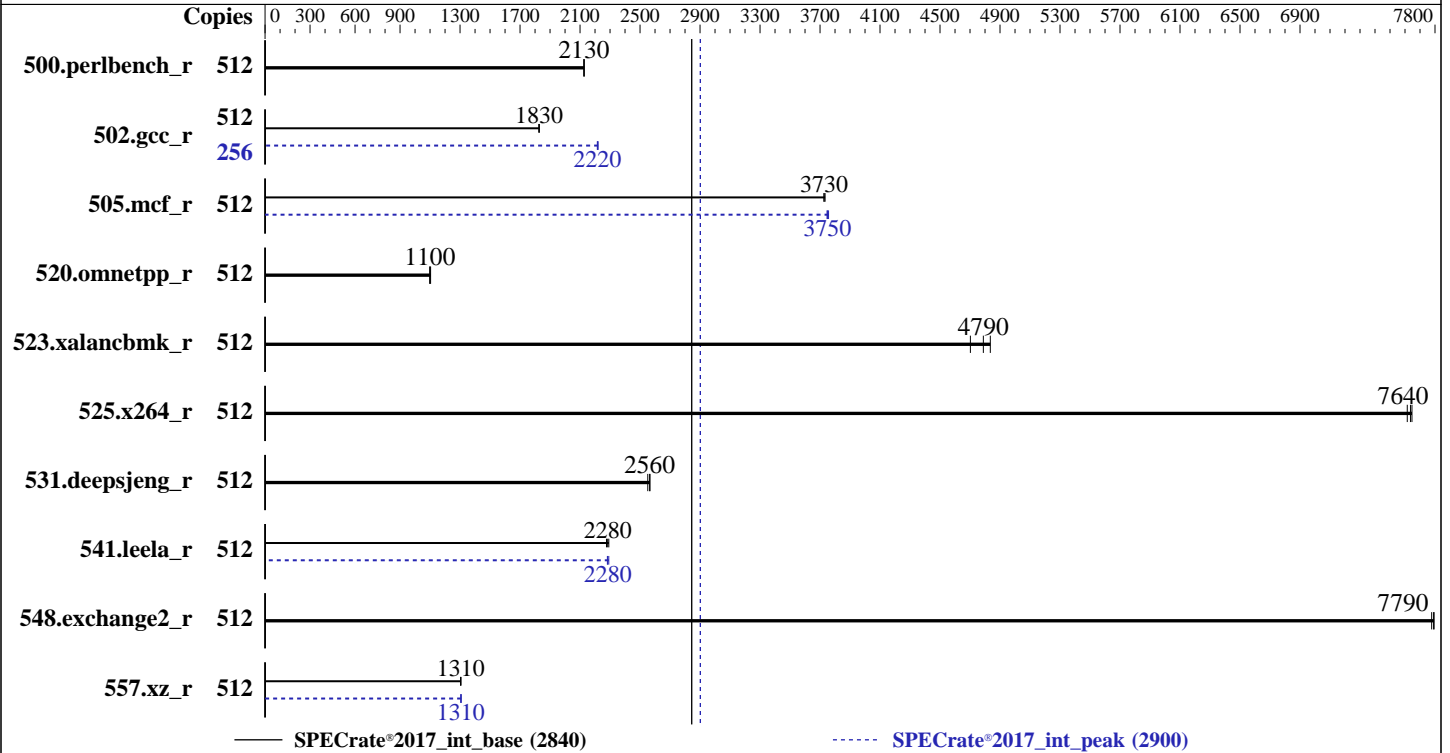

Hardware

CPU Name: AMD EPYC 9755
 Max MHz: 4100
 Nominal: 2700
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 960 GB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version 01.08.00 released Feb-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	512	383	2130	383	2130	384	2130	512	383	2130	383	2130	384	2130
502.gcc_r	512	397	1830	397	1830	397	1830	256	163	2220	163	2220	164	2220
505.mcf_r	512	222	3730	222	3730	222	3730	512	220	3760	221	3750	221	3750
520.omnetpp_r	512	612	1100	611	1100	609	1100	512	612	1100	611	1100	609	1100
523.xalancbmk_r	512	113	4790	115	4700	112	4840	512	113	4790	115	4700	112	4840
525.x264_r	512	117	7640	117	7650	118	7620	512	117	7640	117	7650	118	7620
531.deepsjeng_r	512	230	2550	229	2570	229	2560	512	230	2550	229	2570	229	2560
541.leela_r	512	372	2280	371	2280	370	2290	512	371	2280	370	2290	371	2280
548.exchange2_r	512	172	7790	172	7780	172	7790	512	172	7790	172	7780	172	7790
557.xz_r	512	424	1310	424	1300	424	1310	512	424	1310	423	1310	423	1310

SPECrate®2017_int_base = 2840

SPECrate®2017_int_peak = 2900

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
SVM Mode set to disable
DRAM Scrub time set to disable
NUMA nodes per socket set to NPS4
Determinism Slider set to Power
cTDP set to 500
Package Power Limit set to 500
APBDIS set to 1
Memory Speed set to 6400

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Mar 5 06:20:43 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
06:20:43 up 3 min, 1 user, load average: 0.47, 0.29, 0.12
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1     -             06:17   33.00s  1.11s  0.18s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6187450
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 65535
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6187450
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/emplogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9755 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
stepping          : 1
microcode         : 0xb00211e
bugs              : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size         : 192 4K pages
cpu cores        : 128
siblings         : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:       Little Endian
CPU(s):           512
On-line CPU(s) list: 0-511
Vendor ID:        AuthenticAMD
BIOS Vendor ID:   Advanced Micro Devices, Inc.
Model name:       AMD EPYC 9755 128-Core Processor
BIOS Model name:  AMD EPYC 9755 128-Core Processor
BIOS CPU family:  107
CPU family:       26
Model:            2
Thread(s) per core: 2
Core(s) per socket: 128
Socket(s):        2
Stepping:         1
Frequency boost:  enabled
CPU(s) scaling MHz: 66%
CPU max MHz:      4121.1909
CPU min MHz:      1500.0000
BogoMIPS:         5392.18
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                  osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                  perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                  ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                  smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                  avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                  cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                  xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                  nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                  pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                  avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                  avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                  movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

Virtualization: flush_lld debug_swap
L1d cache: AMD-V
L1i cache: 12 MiB (256 instances)
L2 cache: 8 MiB (256 instances)
L3 cache: 256 MiB (256 instances)
NUMA node(s): 1 GiB (32 instances)
NUMA node0 CPU(s): 8
NUMA node1 CPU(s): 0-31,256-287
NUMA node2 CPU(s): 32-63,288-319
NUMA node3 CPU(s): 64-95,320-351
NUMA node4 CPU(s): 96-127,352-383
NUMA node5 CPU(s): 128-159,384-415
NUMA node6 CPU(s): 160-191,416-447
NUMA node7 CPU(s): 192-223,448-479
Vulnerability Gather data sampling: 224-255,480-511
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-31,256-287
node 0 size: 192864 MB
node 0 free: 192241 MB
node 1 cpus: 32-63,288-319
node 1 size: 193519 MB
node 1 free: 193024 MB
node 2 cpus: 64-95,320-351
node 2 size: 193519 MB
node 2 free: 192993 MB
node 3 cpus: 96-127,352-383
node 3 size: 193519 MB
node 3 free: 192991 MB
node 4 cpus: 128-159,384-415
node 4 size: 193519 MB
node 4 free: 192938 MB
node 5 cpus: 160-191,416-447
node 5 size: 193519 MB
node 5 free: 192973 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

node 6 cpus: 192-223,448-479
node 6 size: 193519 MB
node 6 free: 193027 MB
node 7 cpus: 224-255,480-511
node 7 size: 192908 MB
node 7 free: 192404 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1584012712 kB

```

```

-----
10. who -r
run-level 3 Mar 5 06:17

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables
exchange-bmc-os-info fsidd grub2-once haveged hwloc-dump-hwdata ipmievd issue-add-ssh-keys
kexec-load nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysex
systemd-time-wait-sync systemd-timesyncd tuned
generated jexec
indirect systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=57526b2a-7733-4c34-8e82-bd01bcfc67e9
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=383M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 393:

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

current policy: frequency should be within 1.50 GHz and 2.70 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

/dev/nvme0nlp3 xfs 854G 60G 795G 7% /home

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      IEIT SYSTEMS
Product:     NF5180-A8-A0-R0-00
Product Family: Not specified
Serial:      000000000
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
-----

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:   American Megatrends International, LLC.
  BIOS Version:  01.08.00
  BIOS Date:     02/08/2025
-----

```

Compiler Version Notes

```

=====
C      | 502.gcc_r(peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
C      | 502.gcc_r(peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
    | 541.leela_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

====
Fortran | 548.exchange2_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand

-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM

-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 2840

meta brain NF5180G8 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2900

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-05 06:20:42-0500.

Report generated on 2025-04-09 15:00:52 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.