



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3050,
2.13 GHz

SPECfp®_rate2006 = 21.7

SPECfp_rate_base2006 = 21.1

CPU2006 license: 22


Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

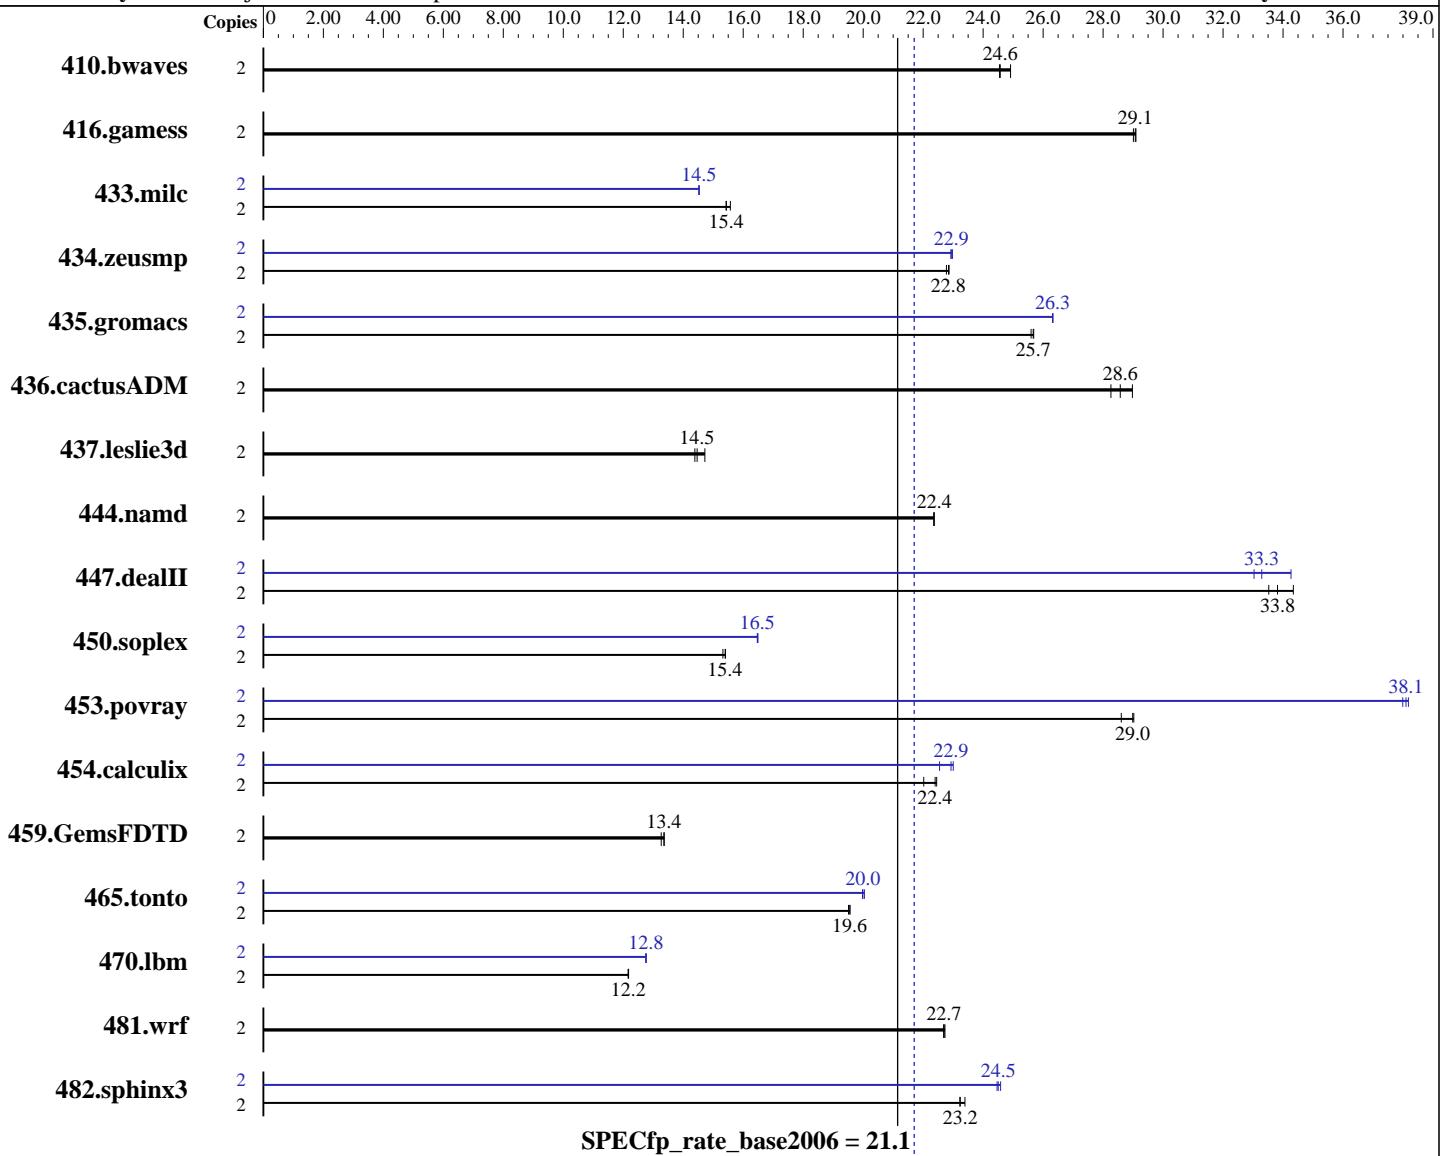

SPECfp_rate_base2006 = 21.1

SPECfp_rate2006 = 21.7

Hardware

CPU Name: Intel Xeon 3050
CPU Characteristics: 1067 MHz system bus
CPU MHz: 2133
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 2 MB I+D on chip per chip

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package ID: l_cc_p_9.1.047
Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package ID: l_fc_p_9.1.043
Auto Parallel: No
File System: ReiserFS

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3050,
2.13 GHz

SPECfp_rate2006 = 21.7

SPECfp_rate_base2006 = 21.1

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

L3 Cache:	None	System State:	Multiuser, Runlevel 3
Other Cache:	None	Base Pointers:	64-bit
Memory:	8 GB (4x2 GB DDR2 PC2-4200E, 2 rank, CAS 4-4-4, with ECC)	Peak Pointers:	32/64-bit
Disk Subsystem:	SATA (160 GB 7200 rpm)	Other Software:	None
Other Hardware:	None		

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1091	24.9	1107	24.5	<u>1106</u>	<u>24.6</u>	2	1091	24.9	1107	24.5	<u>1106</u>	<u>24.6</u>		
416.gamess	2	1346	29.1	1350	29.0	<u>1347</u>	<u>29.1</u>	2	1346	29.1	1350	29.0	<u>1347</u>	<u>29.1</u>		
433.milc	2	1179	15.6	<u>1189</u>	<u>15.4</u>	1190	15.4	2	1264	14.5	<u>1264</u>	<u>14.5</u>	1264	14.5		
434.zeusmp	2	796	22.9	<u>797</u>	<u>22.8</u>	799	22.8	2	794	22.9	792	23.0	<u>793</u>	<u>22.9</u>		
435.gromacs	2	558	25.6	556	25.7	<u>556</u>	<u>25.7</u>	2	543	26.3	<u>543</u>	<u>26.3</u>	542	26.3		
436.cactusADM	2	<u>836</u>	<u>28.6</u>	846	28.3	825	29.0	2	<u>836</u>	<u>28.6</u>	846	28.3	825	29.0		
437.leslie3d	2	1277	14.7	1307	14.4	<u>1300</u>	<u>14.5</u>	2	1277	14.7	1307	14.4	<u>1300</u>	<u>14.5</u>		
444.namd	2	717	22.4	717	22.4	<u>717</u>	<u>22.4</u>	2	717	22.4	717	22.4	<u>717</u>	<u>22.4</u>		
447.dealII	2	683	33.5	666	34.3	<u>677</u>	<u>33.8</u>	2	<u>687</u>	<u>33.3</u>	668	34.3	693	33.0		
450.soplex	2	1089	15.3	1082	15.4	<u>1083</u>	<u>15.4</u>	2	1013	16.5	1011	16.5	<u>1013</u>	<u>16.5</u>		
453.povray	2	367	29.0	372	28.6	<u>367</u>	<u>29.0</u>	2	<u>279</u>	<u>38.1</u>	279	38.2	280	38.0		
454.calculix	2	<u>737</u>	<u>22.4</u>	735	22.5	749	22.0	2	717	23.0	732	22.5	<u>720</u>	<u>22.9</u>		
459.GemsFDTD	2	1588	13.4	<u>1589</u>	<u>13.4</u>	1600	13.3	2	1588	13.4	<u>1589</u>	<u>13.4</u>	1600	13.3		
465.tonto	2	1006	19.6	<u>1006</u>	<u>19.6</u>	1009	19.5	2	982	20.0	985	20.0	<u>984</u>	<u>20.0</u>		
470.lbm	2	2260	12.2	2257	12.2	<u>2258</u>	<u>12.2</u>	2	2153	12.8	<u>2154</u>	<u>12.8</u>	2155	12.8		
481.wrf	2	985	22.7	983	22.7	<u>984</u>	<u>22.7</u>	2	985	22.7	983	22.7	<u>984</u>	<u>22.7</u>		
482.sphinx3	2	1678	23.2	<u>1678</u>	<u>23.2</u>	1666	23.4	2	1593	24.5	<u>1591</u>	<u>24.5</u>	1586	24.6		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 1067 MHz

All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers in your country please see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3050,
2.13 GHz

SPECfp_rate2006 = 21.7

SPECfp_rate_base2006 = 21.1

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

General Notes (Continued)

<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3050,
2.13 GHz

SPECfp_rate2006 = 21.7

SPECfp_rate_base2006 = 21.1

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks:

```
/opt/intel/cc/9.1.047/bin/icc -I/opt/intel/cc/9.1.047/include  
-L/opt/intel/cc/9.1.047/lib
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/9.1.047/bin/icpc  
-I/opt/intel/cc/9.1.047/include -L/opt/intel/cc/9.1.047/lib
```

Fortran benchmarks (except as noted below):

ifort

```
434.zeusmp: /opt/intel/fc/9.1.043/bin/ifort  
-I/opt/intel/fc/9.1.043/include -L/opt/intel/fc/9.1.043/lib
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3050,
2.13 GHz

SPECfp_rate2006 = 21.7

SPECfp_rate_base2006 = 21.1

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

Peak Optimization Flags (Continued)

433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3050,
2.13 GHz

SPECfp_rate2006 = 21.7

SPECfp_rate_base2006 = 21.1

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:41:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 May 2007.