SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 (Intel Xeon E5405)

SPECint®_rate2006 = 103

SPECint_rate_base2006 = 85.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Nov-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

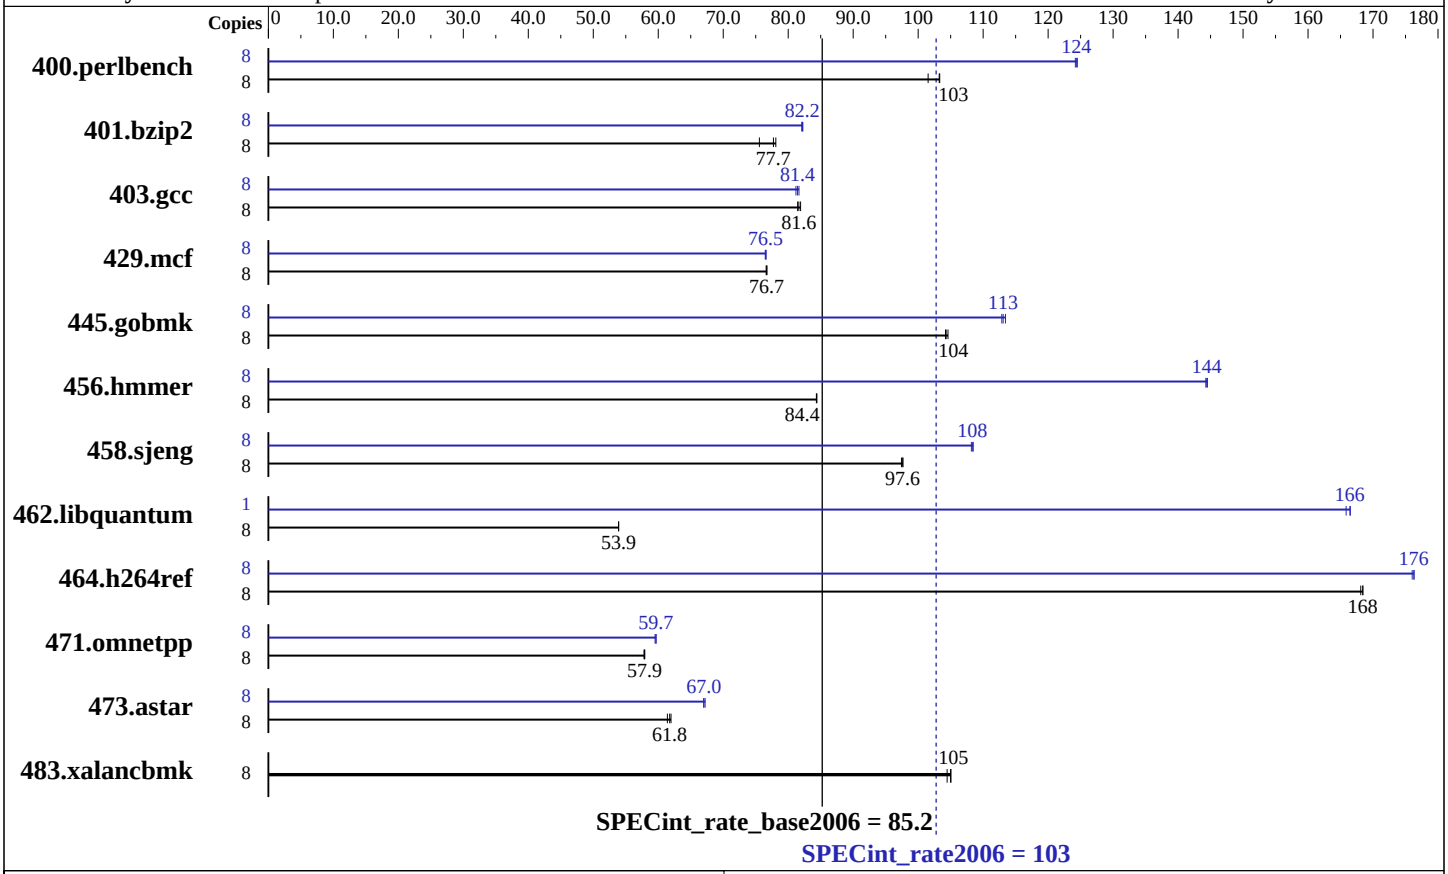

Hardware

CPU Name:	Intel Xeon E5405
CPU Characteristics:	1333MHz system bus
CPU MHz:	1995
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64), kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 (Intel Xeon E5405)

SPECint_rate2006 = 103

SPECint_rate_base2006 = 85.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Nov-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	770	102	757	103	**757**	**103**	8	629	124	628	124	**629**	**124**
401.bzip2	8	1022	75.6	989	78.1	**993**	**77.7**	8	939	82.3	**939**	**82.2**	941	82.1
403.gcc	8	786	81.9	791	81.4	**789**	**81.6**	8	**791**	**81.4**	793	81.2	789	81.7
429.mcf	8	**951**	**76.7**	951	76.7	952	76.6	8	954	76.5	952	76.6	**953**	**76.5**
445.gobmk	8	802	105	**805**	**104**	805	104	8	740	113	**742**	**113**	744	113
456.hmmer	8	**885**	**84.4**	884	84.4	885	84.3	8	517	144	**517**	**144**	516	145
458.sjeng	8	991	97.6	**991**	**97.6**	994	97.4	8	892	108	895	108	**894**	**108**
462.libquantum	8	3075	53.9	3076	53.9	**3075**	**53.9**	1	125	166	**124**	**166**	124	167
464.h264ref	8	**1051**	**168**	1053	168	1051	168	8	1006	176	**1004**	**176**	1004	176
471.omnetpp	8	865	57.8	863	57.9	**864**	**57.9**	8	**838**	**59.7**	838	59.7	840	59.5
473.astar	8	906	62.0	915	61.4	**909**	**61.8**	8	**838**	**67.0**	836	67.2	838	67.0
483.xalancbmk	8	528	104	**526**	**105**	525	105	8	528	104	**526**	**105**	525	105

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
Powersaved dameon was disabled in OS
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.html

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:08:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2007.