SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon E5430)

SPECint®_rate2006 = 123

SPECint_rate_base2006 = 101

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

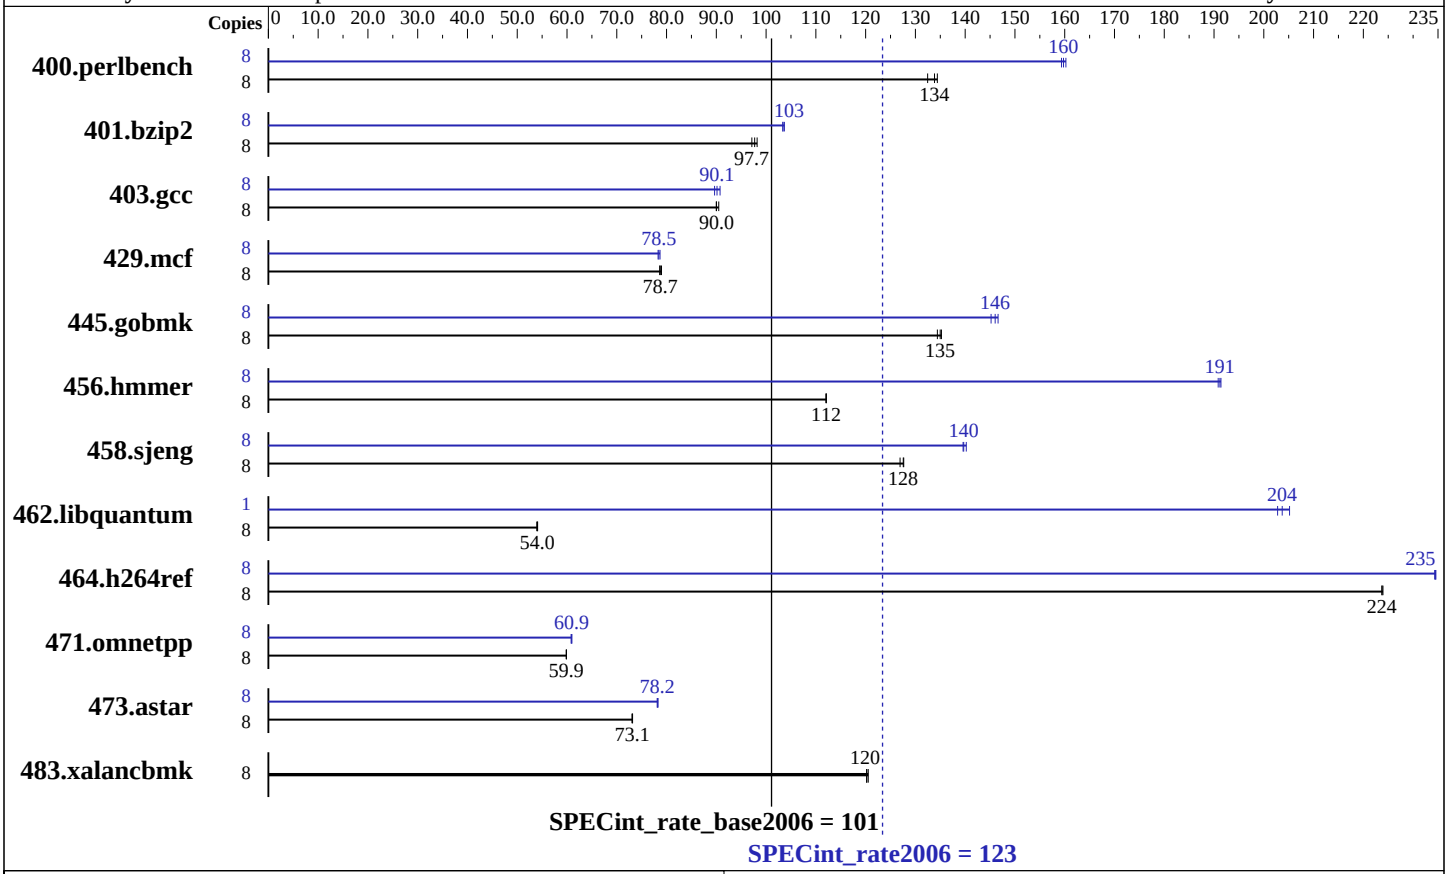

Hardware

CPU Name:	Intel Xeon E5430
CPU Characteristics:	1333MHz system bus
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon E5430)

SPECint_rate2006 = 123

SPECint_rate_base2006 = 101

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	590	132	582	134	**584**	**134**	8	**489**	**160**	488	160	490	159
401.bzip2	8	786	98.2	795	97.1	**790**	**97.7**	8	747	103	**747**	**103**	745	104
403.gcc	8	712	90.5	**715**	**90.0**	716	90.0	8	718	89.6	710	90.8	**714**	**90.1**
429.mcf	8	928	78.6	**926**	**78.7**	924	79.0	8	**930**	**78.5**	927	78.7	932	78.3
445.gobmk	8	**622**	**135**	624	134	621	135	8	**575**	**146**	578	145	572	147
456.hmmer	8	666	112	666	112	**666**	**112**	8	391	191	390	191	**390**	**191**
458.sjeng	8	**759**	**128**	758	128	763	127	8	690	140	**693**	**140**	694	140
462.libquantum	8	3074	53.9	**3067**	**54.0**	3064	54.1	1	101	205	102	203	**102**	**204**
464.h264ref	8	**791**	**224**	791	224	791	224	8	**755**	**235**	755	235	756	234
471.omnetpp	8	**835**	**59.9**	835	59.9	835	59.8	8	820	61.0	**820**	**60.9**	822	60.8
473.astar	8	**768**	**73.1**	767	73.2	769	73.1	8	719	78.1	717	78.3	**719**	**78.2**
483.xalancbmk	8	**459**	**120**	458	121	459	120	8	**459**	**120**	458	121	459	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
Powersaved dameon was disabled in OS
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Fri Jul 25 11:33:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2008.