



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®2006 = 13.9**

## IBM System x3655 (AMD Opteron 2356)

**SPECint\_base2006 = 12.0**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Apr-2008

Hardware Availability: Jul-2008

Software Availability: May-2008

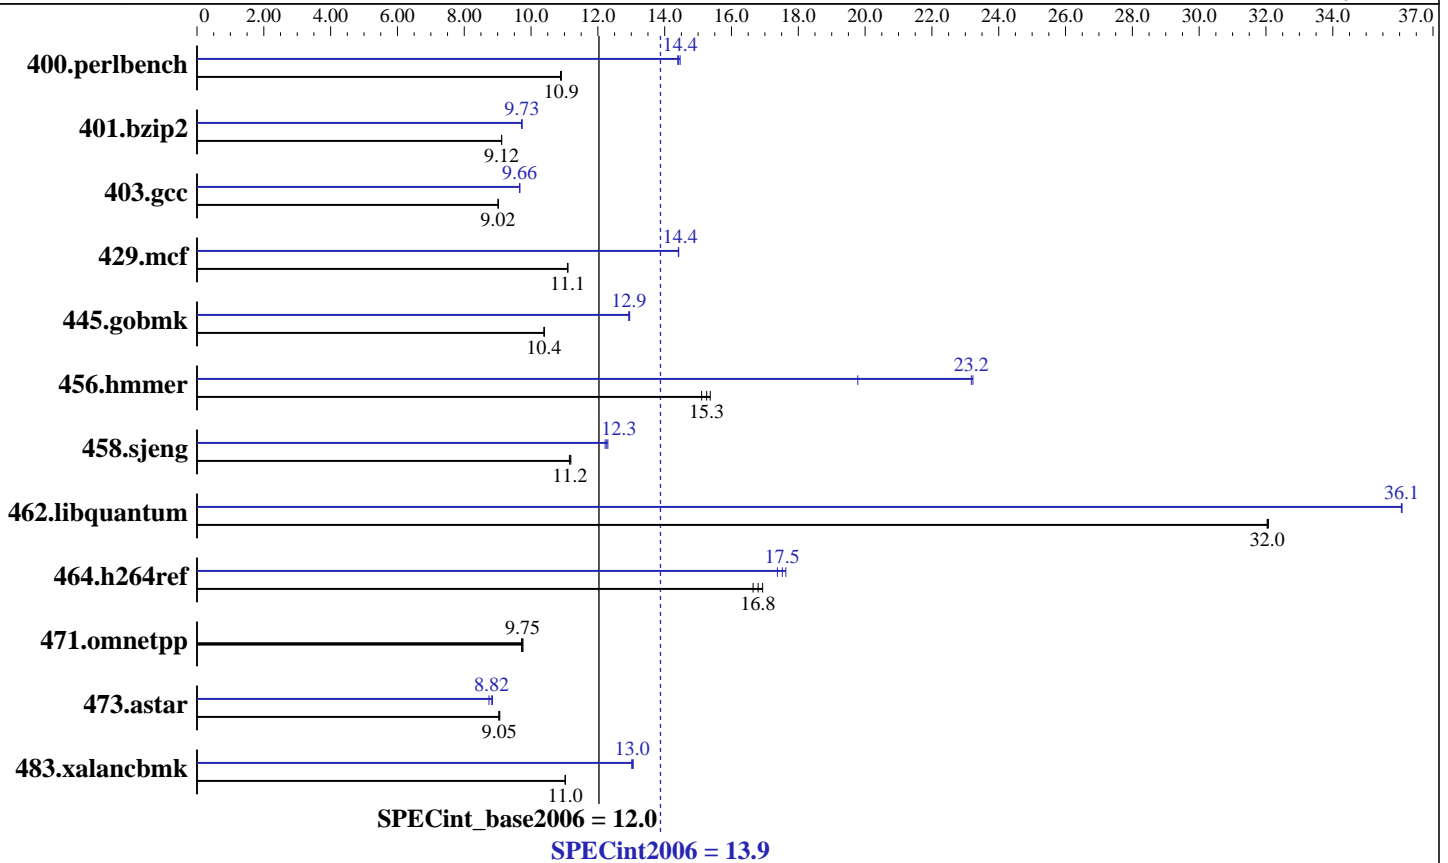

### Hardware

CPU Name: AMD Opteron 2356  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ext3  
 System State: Runlevel 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 13.9

IBM System x3655 (AMD Opteron 2356)

SPECint\_base2006 = 12.0

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: Advanced Micro Devices

Test date: Apr-2008  
Hardware Availability: Jul-2008  
Software Availability: May-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	896	10.9	<b>896</b>	<b>10.9</b>	898	10.9	<b>678</b>	<b>14.4</b>	679	14.4	676	14.5
401.bzip2	<b>1058</b>	<b>9.12</b>	1058	9.12	1058	9.12	<b>992</b>	<b>9.73</b>	992	9.72	992	9.73
403.gcc	893	9.02	<b>893</b>	<b>9.02</b>	893	9.01	833	9.67	<b>834</b>	<b>9.66</b>	834	9.65
429.mcf	821	11.1	<b>822</b>	<b>11.1</b>	822	11.1	632	14.4	633	14.4	<b>633</b>	<b>14.4</b>
445.gobmk	1009	10.4	<b>1010</b>	<b>10.4</b>	1010	10.4	<b>811</b>	<b>12.9</b>	811	12.9	810	13.0
456.hammer	618	15.1	<b>611</b>	<b>15.3</b>	607	15.4	<b>402</b>	<b>23.2</b>	472	19.8	402	23.2
458.sjeng	<b>1084</b>	<b>11.2</b>	1081	11.2	1085	11.1	984	12.3	<b>987</b>	<b>12.3</b>	990	12.2
462.libquantum	<b>647</b>	<b>32.0</b>	647	32.0	646	32.1	575	36.1	<b>575</b>	<b>36.1</b>	574	36.1
464.h264ref	1329	16.6	<b>1317</b>	<b>16.8</b>	1307	16.9	1255	17.6	1274	17.4	<b>1263</b>	<b>17.5</b>
471.omnetpp	641	9.75	643	9.71	<b>641</b>	<b>9.75</b>	641	9.75	643	9.71	<b>641</b>	<b>9.75</b>
473.astar	<b>776</b>	<b>9.05</b>	777	9.03	774	9.06	803	8.74	<b>795</b>	<b>8.82</b>	794	8.85
483.xalancbmk	<b>626</b>	<b>11.0</b>	626	11.0	626	11.0	<b>529</b>	<b>13.0</b>	528	13.1	530	13.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'numactl' was used to bind copies to the cores  
Environment variable PGI\_HUGE\_PAGES set to 150  
'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2457600' was used to set environment locked pages in memory quantity  
Set vm/nr\_hugepages=1200 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages  
powersave -f was used to set the CPU frequency to its maximum.

## Base Compiler Invocation

C benchmarks:  
pgcc  
C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 13.9

IBM System x3655 (AMD Opteron 2356)

SPECint\_base2006 = 12.0

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: May-2008

## Base Portability Flags (Continued)

456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 --zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 13.9

IBM System x3655 (AMD Opteron 2356)

SPECint\_base2006 = 12.0

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: May-2008

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -WOPT:if\_conv=0 -CG:local\_sched\_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4  
 -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64  
 -Bstatic\_pgi

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1  
 -Msmartalloc=huge:150 -tp barcelona -Bstatic\_pgi

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0  
 -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed  
 -Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const  
 -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64  
 -Bstatic\_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)  
 -fastsse -Msmartalloc=huge:150 -Mfprelaxed  
 -tp barcelona-64 -Bstatic\_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8  
 -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg  
 -tp barcelona-64 -Bstatic\_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline(pass 2)  
 -Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150  
 -Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 13.9

IBM System x3655 (AMD Opteron 2356)

SPECint\_base2006 = 12.0

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmarheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmarheap

## Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:27:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 June 2008.