



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint®2006 = **21.6**

H8DA3-2 , AMD Opteron 2386 SE

SPECint_base2006 = **17.9**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2009

Hardware Availability: Feb-2009

Software Availability: Jun-2008

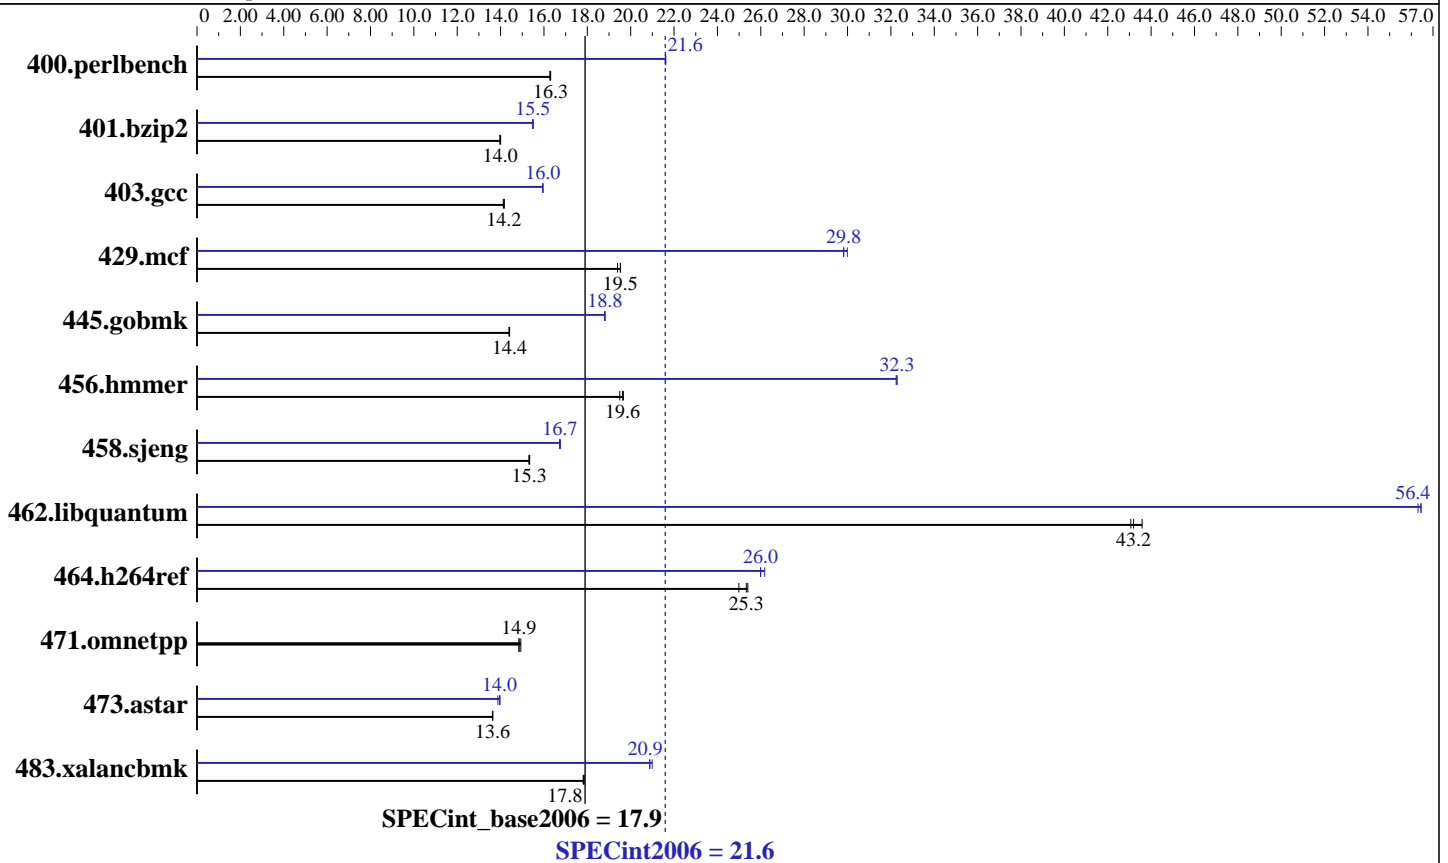

Hardware

CPU Name: AMD Opteron 2386 SE
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
 Disk Subsystem: 1 x 160 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18 32-bit and 64-bit libhugetlbfs libraries Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 21.6

H8DA3-2 , AMD Opteron 2386 SE

SPECint_base2006 = 17.9

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Feb-2009
Hardware Availability: Feb-2009
Software Availability: Jun-2008

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 600 | 16.3 | <u>599</u> | <u>16.3</u> | 599 | 16.3 | 452 | 21.6 | 452 | 21.6 | <u>452</u> | <u>21.6</u> |
| 401.bzip2 | 691 | 14.0 | <u>690</u> | <u>14.0</u> | 689 | 14.0 | <u>623</u> | <u>15.5</u> | 623 | 15.5 | 622 | 15.5 |
| 403.gcc | 570 | 14.1 | <u>569</u> | <u>14.2</u> | 568 | 14.2 | 505 | 16.0 | 505 | 15.9 | <u>505</u> | <u>16.0</u> |
| 429.mcf | 470 | 19.4 | 467 | 19.5 | <u>467</u> | <u>19.5</u> | <u>306</u> | <u>29.8</u> | 304 | 30.0 | 306 | 29.8 |
| 445.gobmk | 729 | 14.4 | <u>728</u> | <u>14.4</u> | 728 | 14.4 | 558 | 18.8 | <u>558</u> | <u>18.8</u> | 557 | 18.8 |
| 456.hammer | <u>475</u> | <u>19.6</u> | 474 | 19.7 | 479 | 19.5 | 289 | 32.3 | 289 | 32.2 | <u>289</u> | <u>32.3</u> |
| 458.sjeng | 789 | 15.3 | 790 | 15.3 | <u>790</u> | <u>15.3</u> | <u>723</u> | <u>16.7</u> | 722 | 16.8 | 724 | 16.7 |
| 462.libquantum | 475 | 43.6 | <u>480</u> | <u>43.2</u> | 481 | 43.1 | <u>367</u> | <u>56.4</u> | 367 | 56.4 | 368 | 56.3 |
| 464.h264ref | 886 | 25.0 | <u>874</u> | <u>25.3</u> | 871 | 25.4 | <u>851</u> | <u>26.0</u> | 851 | 26.0 | 845 | 26.2 |
| 471.omnetpp | <u>421</u> | <u>14.9</u> | 419 | 14.9 | 421 | 14.8 | <u>421</u> | <u>14.9</u> | 419 | 14.9 | 421 | 14.8 |
| 473.astar | <u>515</u> | <u>13.6</u> | 515 | 13.6 | 515 | 13.6 | <u>503</u> | <u>14.0</u> | 502 | 14.0 | 506 | 13.9 |
| 483.xalancbmk | 387 | 17.8 | 386 | 17.9 | <u>387</u> | <u>17.8</u> | 329 | 21.0 | <u>330</u> | <u>20.9</u> | 331 | 20.9 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/usr/cpu2006/amd909gh-libs/64:/usr/cpu2006/amd909gh-libs/32"

Tested system is built in open environment,
to ensure system stability, a 550W (minimum) ATX power
[4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description can be obtained at
<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DA3-2.cfm>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 21.6

H8DA3-2 , AMD Opteron 2386 SE

SPECint_base2006 = 17.9

CPU2006 license: 001176

Test date: Feb-2009

Test sponsor: Supermicro

Hardware Availability: Feb-2009

Tested by: Supermicro

Software Availability: Jun-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 21.6

H8DA3-2 , AMD Opteron 2386 SE

SPECint_base2006 = 17.9

CPU2006 license: 001176

Test date: Feb-2009

Test sponsor: Supermicro

Hardware Availability: Feb-2009

Tested by: Supermicro

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmcr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
 -IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
 -CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
 -OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
 -LNO:trip_count=256 -LNO:prefetch_ahead=10
 -CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -L/usr/lib -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 21.6

H8DA3-2 , AMD Opteron 2386 SE

SPECint_base2006 = 17.9

CPU2006 license: 001176

Test date: Feb-2009

Test sponsor: Supermicro

Hardware Availability: Feb-2009

Tested by: Supermicro

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
 -LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
 -LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
 -Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
 --zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -L/root/work/libraries/SmartHeap_8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 21.6

H8DA3-2 , AMD Opteron 2386 SE

SPECint_base2006 = 17.9

CPU2006 license: 001176

Test date: Feb-2009

Test sponsor: Supermicro

Hardware Availability: Feb-2009

Tested by: Supermicro

Software Availability: Jun-2008

Peak Other Flags (Continued)

456.hmmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:35:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 June 2009.