SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 (Intel Xeon E5462)

SPECint®_rate2006 = 143

SPECint_rate_base2006 = 134

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Apr-2009
Hardware Availability: Nov-2008
Software Availability: Feb-2009

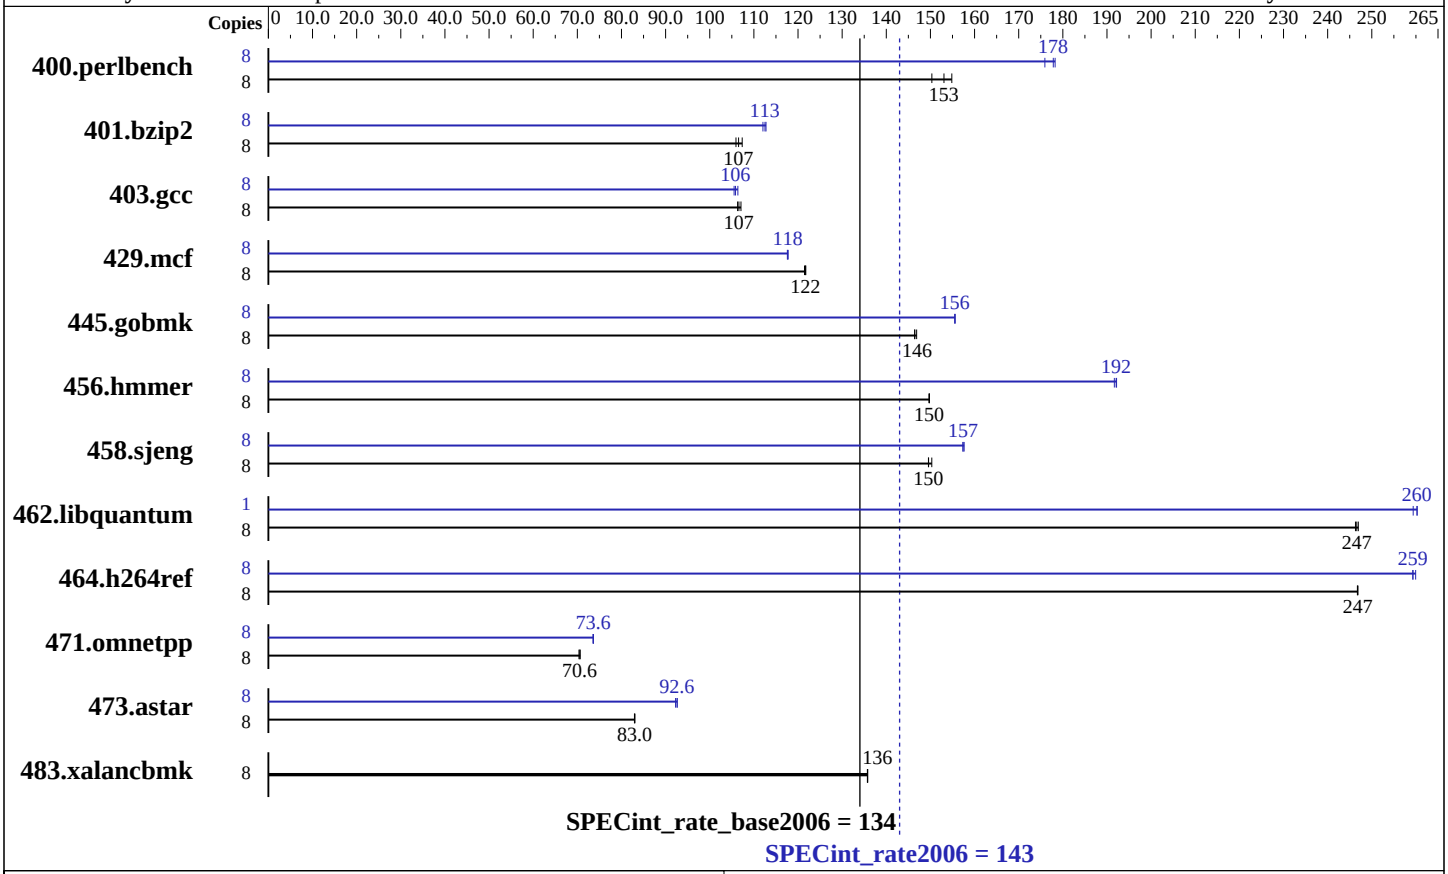

Hardware

CPU Name:	Intel Xeon E5462
CPU Characteristics:	1600MHz system bus
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-6400F ECC)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10(x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 (Intel Xeon E5462)

SPECint_rate2006 = 143

SPECint_rate_base2006 = 134

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Apr-2009
Hardware Availability: Nov-2008
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	520	150	505	155	**511**	**153**	8	444	176	438	178	**440**	**178**
401.bzip2	8	**725**	**107**	729	106	719	107	8	**686**	**113**	685	113	689	112
403.gcc	8	606	106	**604**	**107**	601	107	8	610	106	**608**	**106**	605	106
429.mcf	8	**600**	**122**	601	121	599	122	8	620	118	**620**	**118**	620	118
445.gobmk	8	571	147	573	146	**573**	**146**	8	539	156	**539**	**156**	540	156
456.hmmer	8	**498**	**150**	499	150	498	150	8	389	192	**389**	**192**	388	192
458.sjeng	8	644	150	**647**	**150**	647	150	8	615	157	**615**	**157**	614	158
462.libquantum	8	673	246	**672**	**247**	671	247	1	**79.6**	**260**	79.6	260	79.9	259
464.h264ref	8	**717**	**247**	718	247	717	247	8	**683**	**259**	683	259	681	260
471.omnetpp	8	**709**	**70.6**	708	70.6	711	70.4	8	**679**	**73.6**	680	73.5	679	73.6
473.astar	8	677	83.0	**677**	**83.0**	677	82.9	8	606	92.6	**606**	**92.6**	609	92.3
483.xalancbmk	8	**407**	**136**	406	136	407	136	8	**407**	**136**	406	136	407	136

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
taskset was used to bind processes to cores except
for 462.libquantum peak
Hardware Sector Prefetch Enable and Adjacent Sector Prefetch Disable
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

Continued on next page

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3`

429.mcf: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4`

462.libquantum: `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -parallel -par-runtime-control -opt-prefetch`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.17.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.17.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:44:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2009.