



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint®\_rate2006 = 40.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint\_rate\_base2006 = 39.0

CPU2006 license: 13


Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

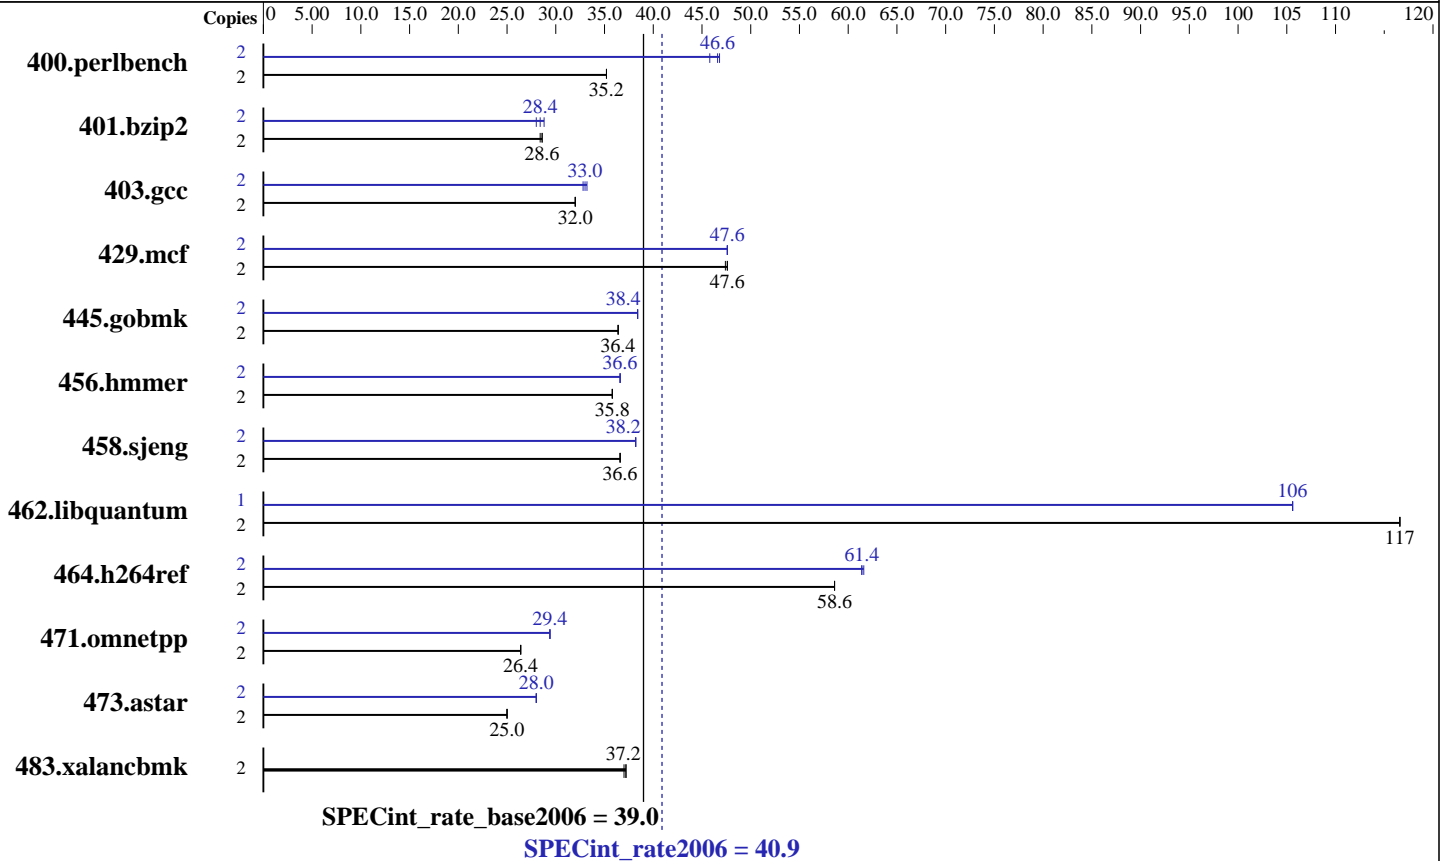

### Hardware

CPU Name: Intel Core 2 Duo E8200  
 CPU Characteristics:  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 4 GB (4x1GB DDR2-800 CL5)  
 Disk Subsystem: Seagate 320 GB SATA, 7200RPM  
 Other Hardware: None

### Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)  
 Compiler: Intel C++ Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cproc\_p\_11.0.054  
 Microsoft Visual Studio 2008 (for libraries)  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.1 from  
<http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 40.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint\_rate\_base2006 = 39.0

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	554	35.2	554	35.2	<b>554</b>	<b>35.2</b>	2	426	45.8	418	46.8	<b>419</b>	<b>46.6</b>
401.bzip2	2	<b>674</b>	<b>28.6</b>	673	28.6	677	28.4	2	<b>678</b>	<b>28.4</b>	670	28.8	690	28.0
403.gcc	2	503	32.0	<b>503</b>	<b>32.0</b>	502	32.0	2	490	32.8	486	33.2	<b>488</b>	<b>33.0</b>
429.mcf	2	385	47.4	382	47.6	<b>383</b>	<b>47.6</b>	2	383	47.6	383	47.6	<b>383</b>	<b>47.6</b>
445.gobmk	2	578	36.4	<b>577</b>	<b>36.4</b>	577	36.4	2	546	38.4	<b>545</b>	<b>38.4</b>	545	38.4
456.hammer	2	521	35.8	<b>521</b>	<b>35.8</b>	521	35.8	2	510	36.6	<b>510</b>	<b>36.6</b>	510	36.6
458.sjeng	2	<b>662</b>	<b>36.6</b>	662	36.6	663	36.6	2	<b>634</b>	<b>38.2</b>	634	38.2	634	38.2
462.libquantum	2	356	117	<b>356</b>	<b>117</b>	356	117	1	196	106	<b>196</b>	<b>106</b>	196	106
464.h264ref	2	756	58.6	<b>756</b>	<b>58.6</b>	755	58.6	2	720	61.4	719	61.6	<b>720</b>	<b>61.4</b>
471.omnetpp	2	472	26.4	472	26.4	<b>472</b>	<b>26.4</b>	2	424	29.4	<b>424</b>	<b>29.4</b>	424	29.4
473.astar	2	562	25.0	561	25.0	<b>561</b>	<b>25.0</b>	2	502	28.0	<b>501</b>	<b>28.0</b>	501	28.0
483.xalancbmk	2	372	37.0	372	37.2	<b>372</b>	<b>37.2</b>	2	372	37.0	372	37.2	<b>372</b>	<b>37.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

Tested systems can be used with Shin-G ATX case,  
 Antec Truepower Trio power supply TP3-650  
 Binaries were built on Windows Vista Ultimate (32-bit)  
 Binaries were built on Windows Vista Ultimate (32-bit)  
 OMP\_NUM\_THREADS set to number of logical processors as seen by the OS  
 KMP\_AFFINITY set to physical,0  
 submit disabled for 462.libquantum peak

## Base Compiler Invocation

C benchmarks:  
 icl -Qvc9 -Qc99

C++ benchmarks:  
 icl -Qvc9



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 40.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint\_rate\_base2006 = 39.0

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 40.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint\_rate\_base2006 = 39.0

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

401.bzips2: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000

403.gcc: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

445.gobmk: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
/F512000000

458.sjeng: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
-Qparallel -Qpar-runtime-control -Qvec-guard-write  
/F512000000

464.h264ref: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 40.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint\_rate\_base2006 = 39.0

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Apr-2009

**Hardware Availability:** May-2009

**Software Availability:** Nov-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 01:32:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 June 2009.