



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint®\_rate2006 = 381

PRIMERGY RX300 S6, Intel Xeon X5680, 3.33 GHz

### SPECint\_rate\_base2006 = 355

CPU2006 license: 19


Test date: Feb-2010

Test sponsor: Fujitsu

Hardware Availability: Apr-2010

Tested by: Fujitsu

Software Availability: Jan-2010

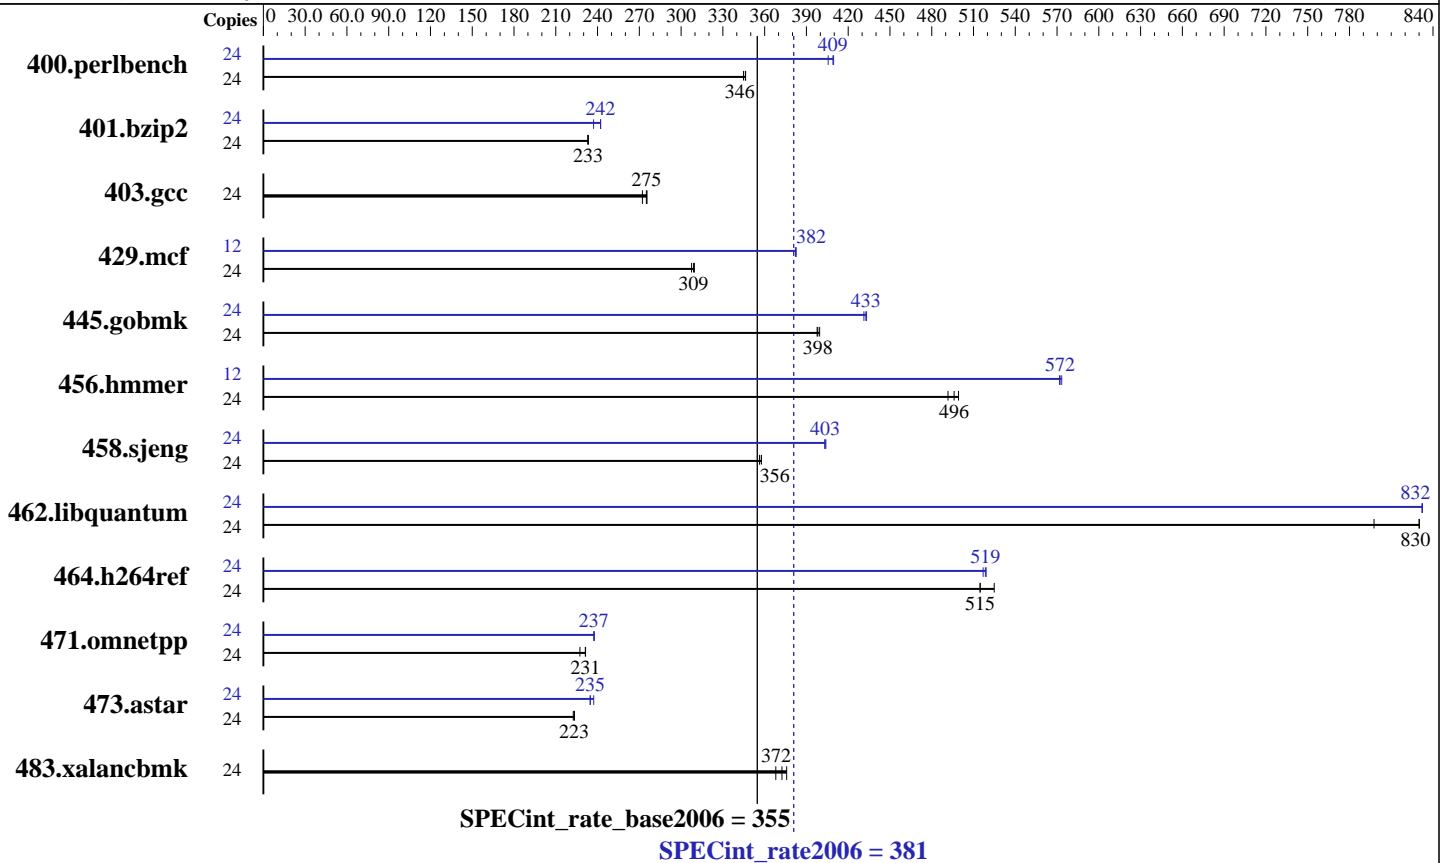

### Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
 Disk Subsystem: 1 x SATA, 160 GB, 5.4 krpm  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 381

PRIMERGY RX300 S6, Intel Xeon X5680, 3.33 GHz

SPECint\_rate\_base2006 = 355

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Feb-2010  
Hardware Availability: Apr-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>677</b>	<b>346</b>	677	346	680	345	24	578	406	573	410	<b>573</b>	<b>409</b>
401.bzip2	24	994	233	<b>993</b>	<b>233</b>	992	233	24	956	242	<b>957</b>	<b>242</b>	977	237
403.gcc	24	<b>702</b>	<b>275</b>	701	276	710	272	24	<b>702</b>	<b>275</b>	701	276	710	272
429.mcf	24	<b>708</b>	<b>309</b>	707	310	712	308	12	<b>286</b>	<b>382</b>	286	382	286	383
445.gobmk	24	630	400	633	398	<b>632</b>	<b>398</b>	24	581	433	<b>582</b>	<b>433</b>	584	431
456.hammer	24	<b>451</b>	<b>496</b>	449	499	455	492	12	195	573	<b>196</b>	<b>572</b>	196	572
458.sjeng	24	812	358	<b>815</b>	<b>356</b>	815	356	24	720	403	<b>720</b>	<b>403</b>	719	404
462.libquantum	24	<b>599</b>	<b>830</b>	623	798	599	830	24	<b>598</b>	<b>832</b>	597	832	598	832
464.h264ref	24	1032	515	1012	525	<b>1032</b>	<b>515</b>	24	1027	517	<b>1024</b>	<b>519</b>	1023	519
471.omnetpp	24	<b>649</b>	<b>231</b>	648	231	660	227	24	<b>632</b>	<b>237</b>	631	238	632	237
473.astar	24	757	223	<b>755</b>	<b>223</b>	754	223	24	710	237	<b>718</b>	<b>235</b>	718	235
483.xalancbmk	24	450	368	<b>445</b>	<b>372</b>	441	376	24	450	368	<b>445</b>	<b>372</b>	441	376

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disabled

## General Notes

This result was measured on the PRIMERGY RX300 S6. The PRIMERGY RX300 S6 and the PRIMERGY TX300 S6 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 381

PRIMERGY RX300 S6, Intel Xeon X5680, 3.33 GHz

SPECint\_rate\_base2006 = 355

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Feb-2010  
Hardware Availability: Apr-2010  
Software Availability: Jan-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 381

PRIMERGY RX300 S6, Intel Xeon X5680, 3.33 GHz

SPECint\_rate\_base2006 = 355

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 381

PRIMERGY RX300 S6, Intel Xeon X5680, 3.33 GHz

SPECint\_rate\_base2006 = 355

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:41:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 March 2010.