



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = 125

PRIMERGY TX300 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_rate\_base2006 = 120

CPU2006 license: 19


Test date: Feb-2010

Test sponsor: Fujitsu

Hardware Availability: Apr-2010

Tested by: Fujitsu

Software Availability: Jan-2010

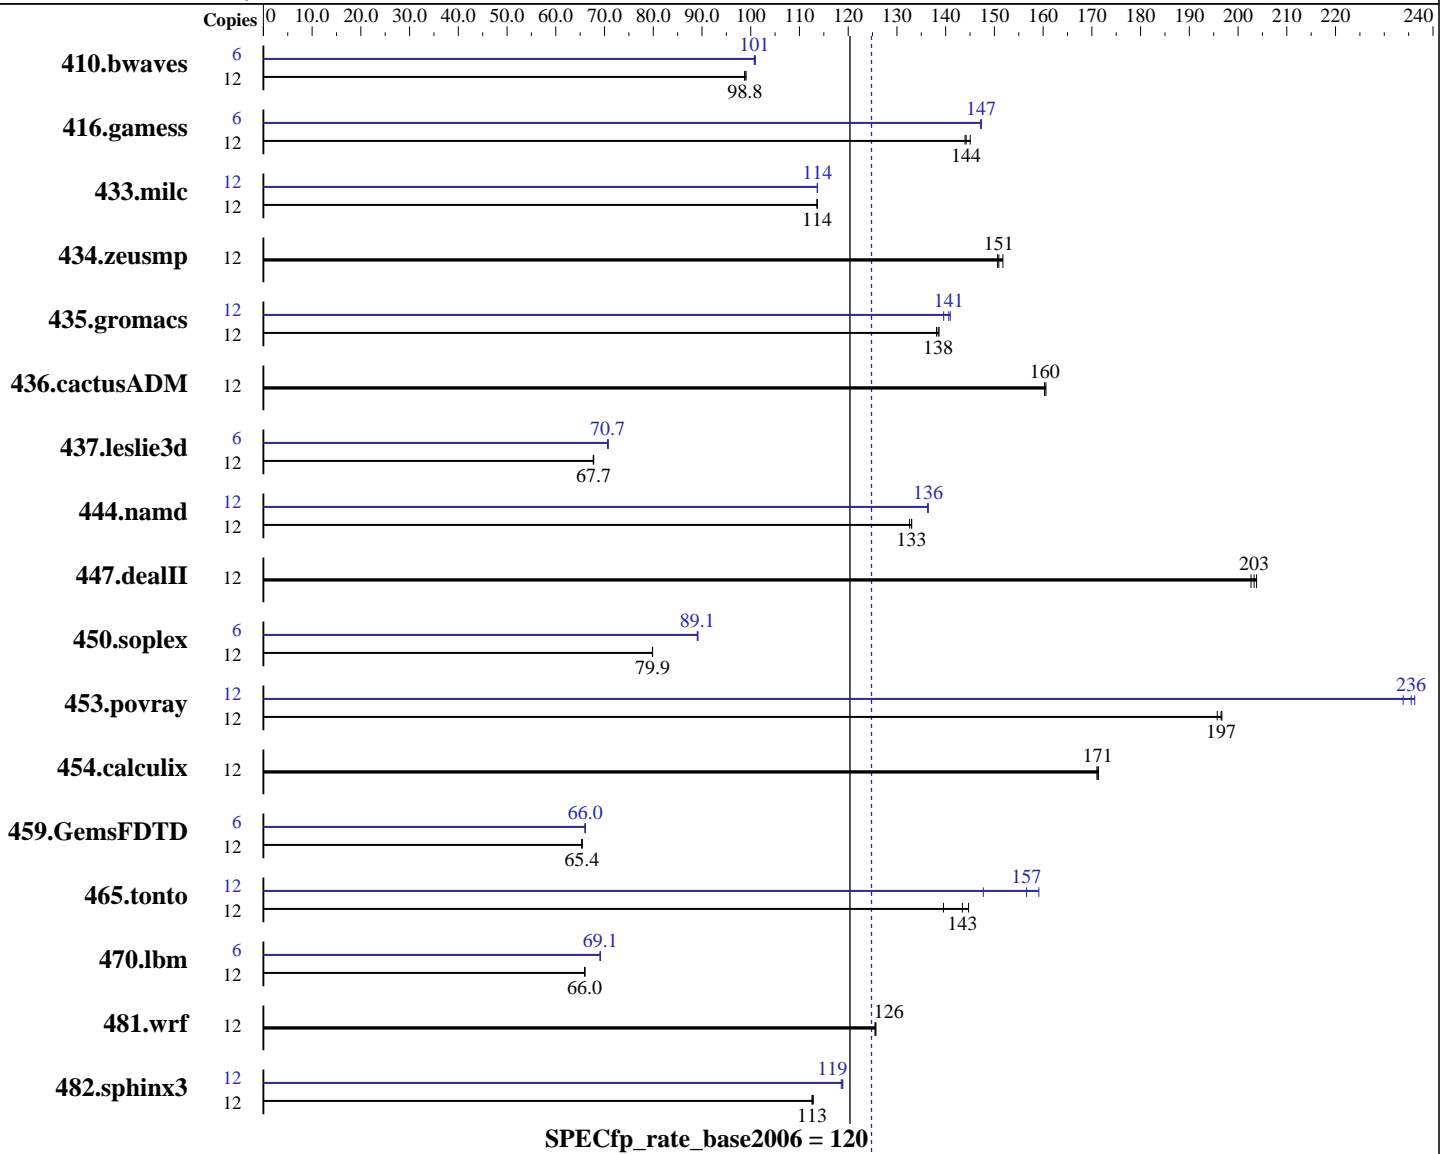

### Hardware

CPU Name: Intel Xeon X5660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = **125**

PRIMERGY TX300 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_rate\_base2006 = **120**

CPU2006 license: 19

Test date: Feb-2010

Test sponsor: Fujitsu

Hardware Availability: Apr-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (6x8 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
Disk Subsystem: 1 x SATA, 160 GB, 5.4 krpm  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1646	99.1	<b>1650</b>	<b>98.8</b>	1652	98.7	6	<b>809</b>	<b>101</b>	808	101	809	101
416.gamess	12	<b>1629</b>	<b>144</b>	1620	145	1632	144	6	797	147	<b>798</b>	<b>147</b>	798	147
433.milc	12	969	114	<b>969</b>	<b>114</b>	970	114	12	969	114	<b>969</b>	<b>114</b>	969	114
434.zeusmp	12	725	151	<b>724</b>	<b>151</b>	720	152	12	725	151	<b>724</b>	<b>151</b>	720	152
435.gromacs	12	<b>619</b>	<b>138</b>	620	138	618	139	12	614	140	608	141	<b>609</b>	<b>141</b>
436.cactusADM	12	<b>894</b>	<b>160</b>	893	161	895	160	12	<b>894</b>	<b>160</b>	893	161	895	160
437.leslie3d	12	<b>1665</b>	<b>67.7</b>	1664	67.8	1666	67.7	6	<b>798</b>	<b>70.7</b>	797	70.8	798	70.6
444.namd	12	723	133	<b>724</b>	<b>133</b>	726	133	12	705	136	706	136	<b>706</b>	<b>136</b>
447.dealII	12	<b>675</b>	<b>203</b>	674	204	677	203	12	<b>675</b>	<b>203</b>	674	204	677	203
450.soplex	12	<b>1253</b>	<b>79.9</b>	1254	79.8	1253	79.9	6	<b>562</b>	<b>89.1</b>	561	89.2	562	89.0
453.povray	12	<b>325</b>	<b>197</b>	325	197	326	196	12	270	236	273	234	<b>271</b>	<b>236</b>
454.calculix	12	<b>578</b>	<b>171</b>	578	171	579	171	12	<b>578</b>	<b>171</b>	578	171	579	171
459.GemsFDTD	12	1948	65.3	<b>1948</b>	<b>65.4</b>	1946	65.4	6	<b>964</b>	<b>66.0</b>	963	66.1	965	66.0
465.tonto	12	<b>823</b>	<b>143</b>	816	145	846	140	12	<b>754</b>	<b>157</b>	742	159	799	148
470.lbm	12	2500	66.0	<b>2500</b>	<b>66.0</b>	2500	65.9	6	<b>1192</b>	<b>69.1</b>	1192	69.1	1193	69.1
481.wrf	12	<b>1068</b>	<b>126</b>	1066	126	1068	126	12	<b>1068</b>	<b>126</b>	1066	126	1068	126
482.sphinx3	12	<b>2077</b>	<b>113</b>	2073	113	2077	113	12	1967	119	<b>1969</b>	<b>119</b>	1972	119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 125**

PRIMERGY TX300 S6, Intel Xeon X5660, 2.80 GHz

**SPECfp\_rate\_base2006 = 120**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Feb-2010

**Hardware Availability:** Apr-2010

**Software Availability:** Jan-2010

## General Notes

This result was measured on the PRIMERGY TX300 S6. The PRIMERGY TX300 S6 and the PRIMERGY RX300 S6 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 125

PRIMERGY TX300 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_rate\_base2006 = 120

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 125**

PRIMERGY TX300 S6, Intel Xeon X5660, 2.80 GHz

**SPECfp\_rate\_base2006 = 120**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Feb-2010

**Hardware Availability:** Apr-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 125

PRIMERGY TX300 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_rate\_base2006 = 120

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:10:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 March 2010.