



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint<sup>®</sup>\_rate2006 = 340

### IBM BladeCenter HS22 (Intel Xeon X5650)

SPECint\_rate\_base2006 = 317

CPU2006 license: 11


Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

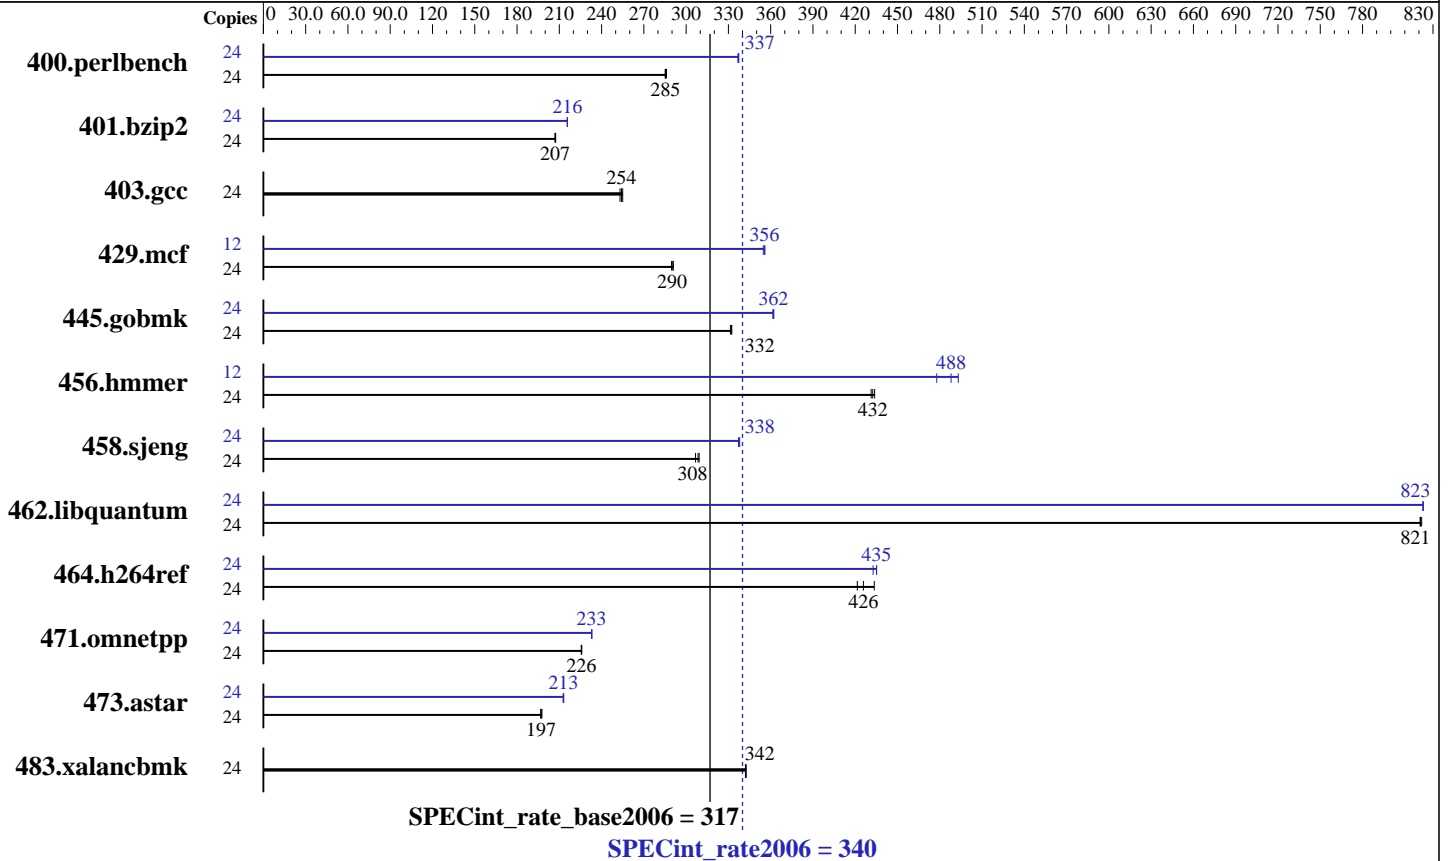

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3-10600R)  
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 340

IBM BladeCenter HS22 (Intel Xeon X5650)

SPECint\_rate\_base2006 = 317

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	820	286	<u>822</u>	<u>285</u>	822	285	24	696	337	695	337	<u>695</u>	<u>337</u>
401.bzip2	24	1119	207	<u>1118</u>	<u>207</u>	1117	207	24	<u>1074</u>	<u>216</u>	1073	216	1074	216
403.gcc	24	758	255	<u>760</u>	<u>254</u>	763	253	24	758	255	<u>760</u>	<u>254</u>	763	253
429.mcf	24	<u>754</u>	<u>290</u>	752	291	756	290	12	308	356	308	355	<u>308</u>	<u>356</u>
445.gobmk	24	757	332	<u>758</u>	<u>332</u>	760	331	24	695	362	696	362	<u>695</u>	<u>362</u>
456.hammer	24	519	431	<u>518</u>	<u>432</u>	516	434	12	227	493	<u>229</u>	<u>488</u>	234	478
458.sjeng	24	<u>942</u>	<u>308</u>	947	307	939	309	24	861	337	859	338	<u>860</u>	<u>338</u>
462.libquantum	24	605	822	<u>606</u>	<u>821</u>	606	821	24	604	823	604	823	<u>604</u>	<u>823</u>
464.h264ref	24	1225	434	1260	421	<u>1247</u>	<u>426</u>	24	1228	433	<u>1221</u>	<u>435</u>	1221	435
471.omnetpp	24	665	226	664	226	<u>664</u>	<u>226</u>	24	644	233	643	233	<u>644</u>	<u>233</u>
473.astar	24	852	198	<u>854</u>	<u>197</u>	856	197	24	792	213	791	213	<u>791</u>	<u>213</u>
483.xalancbmk	24	483	343	<u>484</u>	<u>342</u>	484	342	24	483	343	<u>484</u>	<u>342</u>	484	342

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Platform Notes

Turbo Mode enabled  
Turbo Boost set to Traditional  
Power C-states enabled  
Demand Scrub disabled

## General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 340

IBM BladeCenter HS22 (Intel Xeon X5650)

SPECint\_rate\_base2006 = 317

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 340

IBM BladeCenter HS22 (Intel Xeon X5650)

SPECint\_rate\_base2006 = 317

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 340

IBM BladeCenter HS22 (Intel Xeon X5650)

SPECint\_rate\_base2006 = 317

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

473.astar (continued):

-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:28:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2010.