



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint®2006 = 36.7

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_base2006 = 34.2

CPU2006 license: 001176


Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

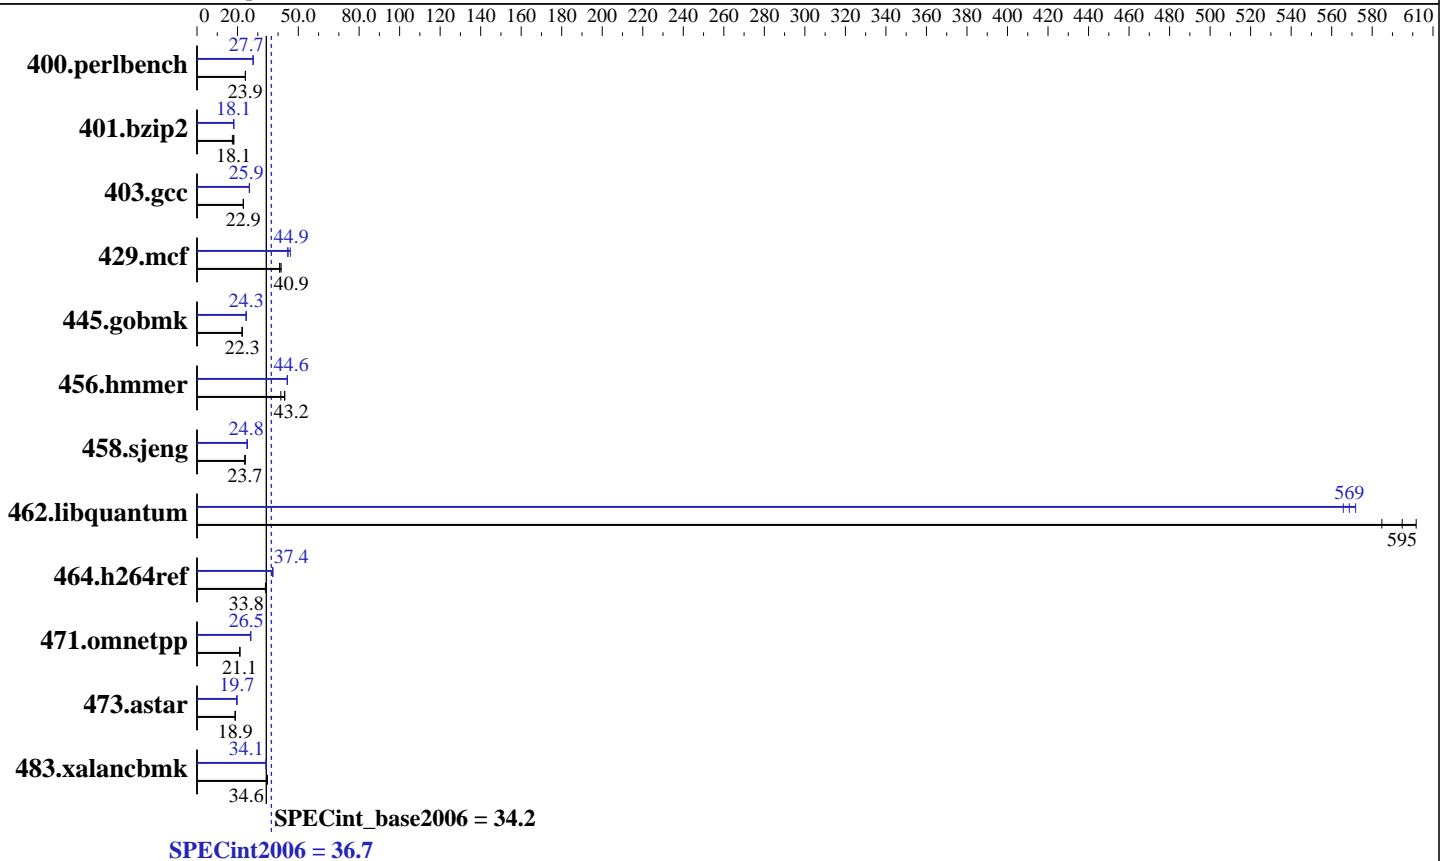

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9)  
 Disk Subsystem: 1 x 320 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint2006 = 36.7

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_base2006 = 34.2

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	410	23.8	<b>408</b>	<b>23.9</b>	408	23.9	352	27.8	353	27.7	<b>352</b>	<b>27.7</b>
401.bzip2	553	17.5	532	18.1	<b>533</b>	<b>18.1</b>	<b>532</b>	<b>18.1</b>	533	18.1	532	18.1
403.gcc	351	22.9	352	22.9	<b>352</b>	<b>22.9</b>	312	25.8	<b>311</b>	<b>25.9</b>	311	25.9
429.mcf	220	41.5	224	40.8	<b>223</b>	<b>40.9</b>	198	46.1	204	44.8	<b>203</b>	<b>44.9</b>
445.gobmk	469	22.4	472	22.2	<b>471</b>	<b>22.3</b>	431	24.3	<b>431</b>	<b>24.3</b>	433	24.2
456.hammer	<b>216</b>	<b>43.2</b>	215	43.3	225	41.4	210	44.5	<b>209</b>	<b>44.6</b>	209	44.6
458.sjeng	512	23.6	510	23.7	<b>511</b>	<b>23.7</b>	<b>487</b>	<b>24.8</b>	490	24.7	487	24.9
462.libquantum	34.4	602	35.4	585	<b>34.8</b>	<b>595</b>	36.6	566	36.2	572	<b>36.4</b>	<b>569</b>
464.h264ref	652	34.0	<b>655</b>	<b>33.8</b>	655	33.8	591	37.4	<b>592</b>	<b>37.4</b>	593	37.3
471.omnetpp	296	21.1	<b>296</b>	<b>21.1</b>	296	21.1	236	26.4	<b>236</b>	<b>26.5</b>	236	26.5
473.astar	372	18.8	<b>372</b>	<b>18.9</b>	372	18.9	357	19.6	<b>356</b>	<b>19.7</b>	356	19.7
483.xalancbmk	<b>199</b>	<b>34.6</b>	198	34.8	200	34.5	202	34.2	<b>202</b>	<b>34.1</b>	203	34.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was set for stacksize unlimited  
KMP\_AFFINITY set to granularity=fine,scatter

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
As tested, the system used a Supermicro  
PWS-665-PQ power supply, 2 SNK-P0017 heatsinks,  
and 1 SAN Ave92 9G0912G101  
2 Nidec UltraFlo T92T12MMA7-57 cooling fans.

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 36.7

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_base2006 = 34.2

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 36.7

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_base2006 = 34.2

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Compiler Invocation (Continued)

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)  
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
 -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 36.7

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_base2006 = 34.2

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 06:51:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 May 2010.