



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon X5550, 2.67 GHz)

SPECint®\_rate2006 = 253

SPECint\_rate\_base2006 = 237

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

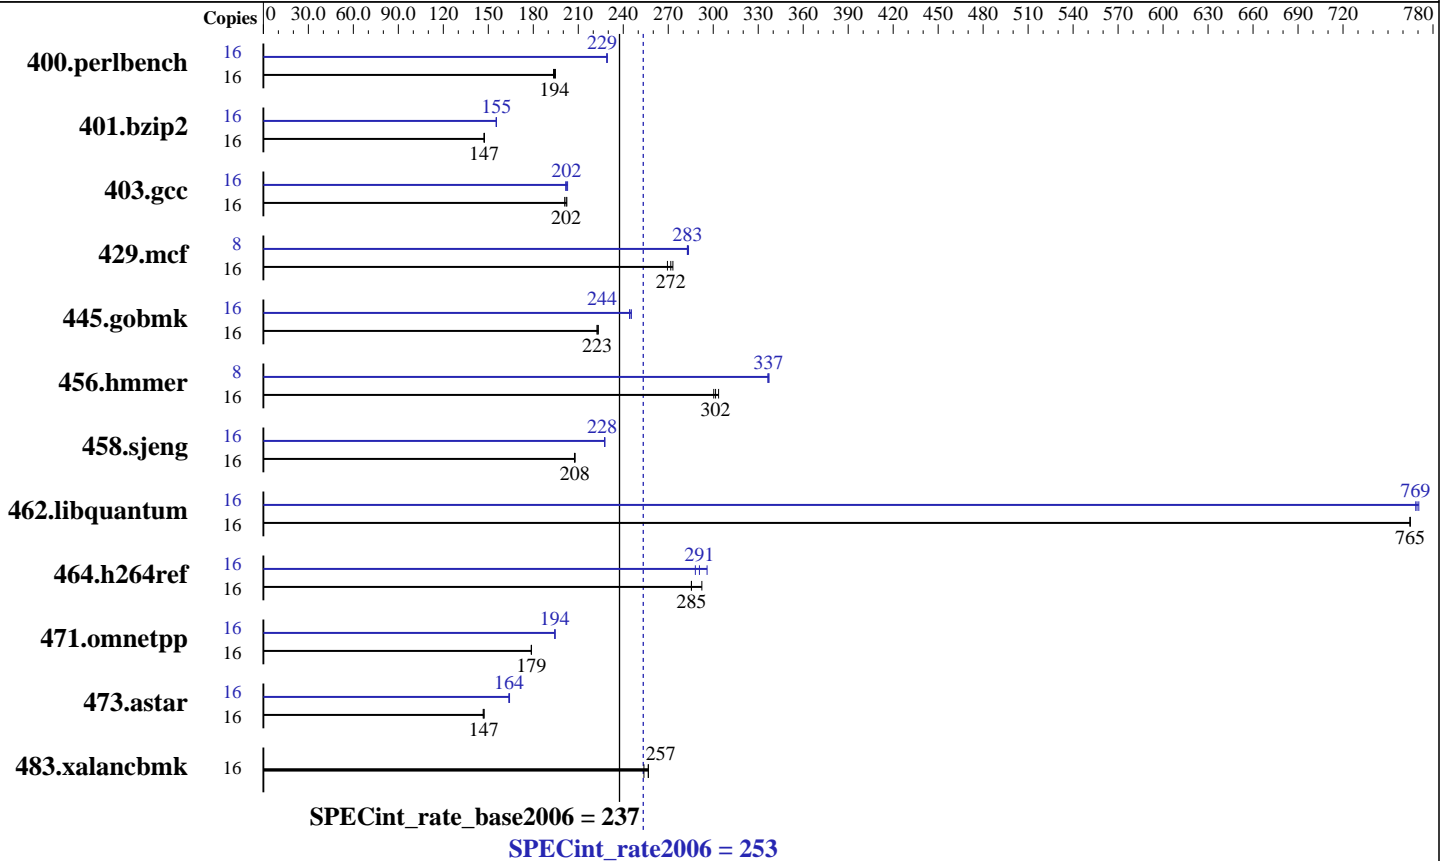

### Hardware

CPU Name: Intel Xeon X5550  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC)  
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon X5550, 2.67 GHz)

SPECint\_rate2006 = 253

SPECint\_rate\_base2006 = 237

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>805</b>	<b>194</b>	808	194	803	195	16	682	229	682	229	<b>682</b>	<b>229</b>
401.bzip2	16	1049	147	1047	147	<b>1048</b>	<b>147</b>	16	994	155	<b>994</b>	<b>155</b>	994	155
403.gcc	16	<b>638</b>	<b>202</b>	636	202	641	201	16	639	202	<b>637</b>	<b>202</b>	635	203
429.mcf	16	534	273	<b>537</b>	<b>272</b>	542	269	8	257	284	258	283	<b>258</b>	<b>283</b>
445.gobmk	16	754	223	<b>754</b>	<b>223</b>	751	223	16	684	245	<b>687</b>	<b>244</b>	687	244
456.hammer	16	<b>495</b>	<b>302</b>	497	300	492	304	8	<b>222</b>	<b>337</b>	221	337	222	336
458.sjeng	16	<b>932</b>	<b>208</b>	931	208	933	207	16	851	228	850	228	<b>850</b>	<b>228</b>
462.libquantum	16	434	765	433	765	<b>433</b>	<b>765</b>	16	431	768	<b>431</b>	<b>769</b>	430	771
464.h264ref	16	1211	292	1241	285	<b>1240</b>	<b>285</b>	16	<b>1218</b>	<b>291</b>	1229	288	1197	296
471.omnetpp	16	560	179	<b>560</b>	<b>179</b>	559	179	16	514	194	<b>514</b>	<b>194</b>	514	194
473.astar	16	<b>764</b>	<b>147</b>	763	147	766	147	16	<b>685</b>	<b>164</b>	686	164	684	164
483.xalancbmk	16	430	257	<b>430</b>	<b>257</b>	435	254	16	430	257	<b>430</b>	<b>257</b>	435	254

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
The Dell PowerEdge R610 and  
the Bull NovaScale R440 F2 models are electronically equivalent.  
The results have been measured on a Bull NovaScale R440 F2 model.

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon X5550, 2.67 GHz)

SPECint\_rate2006 = 253

SPECint\_rate\_base2006 = 237

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon X5550, 2.67 GHz)

SPECint\_rate2006 = 253

SPECint\_rate\_base2006 = 237

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon X5550, 2.67 GHz)

SPECint\_rate2006 = 253

SPECint\_rate\_base2006 = 237

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

473.astar (continued):

`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 09:28:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 May 2010.