



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTT-IBQF (Intel Xeon E5640, 2.67 GHz)

SPECint®2006 = 34.6

SPECint\_base2006 = 32.0

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

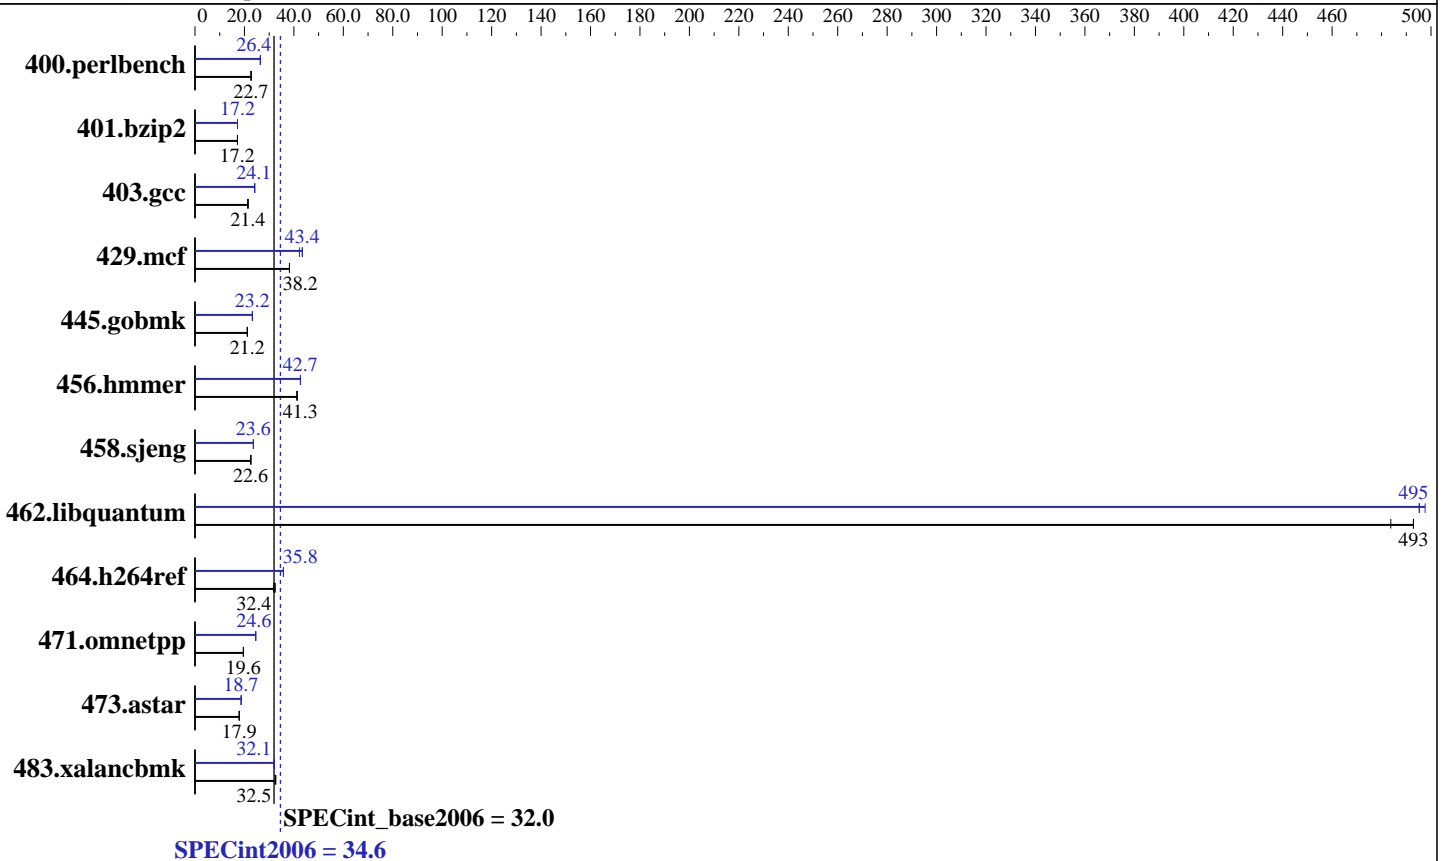

### Hardware

CPU Name: Intel Xeon E5640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1066 RDIMM, ECC, CL7)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTT-IBQF (Intel Xeon E5640, 2.67 GHz)

SPECint2006 = 34.6

SPECint\_base2006 = 32.0

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jun-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	432	22.6	<b>430</b>	<b>22.7</b>	430	22.7	370	26.4	<b>369</b>	<b>26.4</b>	369	26.5
401.bzip2	<b>562</b>	<b>17.2</b>	562	17.2	562	17.2	<b>561</b>	<b>17.2</b>	561	17.2	561	17.2
403.gcc	377	21.3	<b>377</b>	<b>21.4</b>	374	21.5	333	24.1	334	24.1	<b>333</b>	<b>24.1</b>
429.mcf	239	38.2	239	38.2	<b>239</b>	<b>38.2</b>	<b>210</b>	<b>43.4</b>	216	42.2	210	43.4
445.gobmk	496	21.2	<b>496</b>	<b>21.2</b>	495	21.2	<b>452</b>	<b>23.2</b>	452	23.2	452	23.2
456.hammer	<b>226</b>	<b>41.3</b>	226	41.2	226	41.4	219	42.7	219	42.6	<b>219</b>	<b>42.7</b>
458.sjeng	536	22.6	<b>536</b>	<b>22.6</b>	536	22.6	512	23.6	513	23.6	<b>512</b>	<b>23.6</b>
462.libquantum	42.0	493	42.8	484	<b>42.0</b>	<b>493</b>	41.8	495	<b>41.8</b>	<b>495</b>	41.6	498
464.h264ref	<b>684</b>	<b>32.4</b>	695	31.8	683	32.4	<b>618</b>	<b>35.8</b>	618	35.8	619	35.7
471.omnetpp	<b>319</b>	<b>19.6</b>	319	19.6	319	19.6	255	24.5	<b>254</b>	<b>24.6</b>	254	24.6
473.astar	394	17.8	391	18.0	<b>392</b>	<b>17.9</b>	<b>376</b>	<b>18.7</b>	375	18.7	376	18.7
483.xalancbmk	<b>212</b>	<b>32.5</b>	211	32.7	213	32.4	215	32.1	<b>215</b>	<b>32.1</b>	216	32.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
As tested, the system used a Supermicro CSE-827H-R1400B chassis.  
The chassis is bundled with a PWS-1K41P-1R power supply, 2 SNK-P0037P heatsinks,  
and 4 FAN-00111L4 cooling fans.

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTT-IBQF (Intel Xeon E5640, 2.67 GHz)

SPECint2006 = 34.6

SPECint\_base2006 = 32.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTT-IBQF (Intel Xeon E5640, 2.67 GHz)

SPECint2006 = 34.6

SPECint\_base2006 = 32.0

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jun-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Peak Compiler Invocation (Continued)

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)  
-auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTT-IBQF (Intel Xeon E5640, 2.67 GHz)

SPECint2006 = 34.6

SPECint\_base2006 = 32.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 12:03:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 August 2010.