



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®_rate2006 = 348

PRIMERGY BX920 S2, Intel Xeon X5660, 2.80 GHz

SPECint_rate_base2006 = 327

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

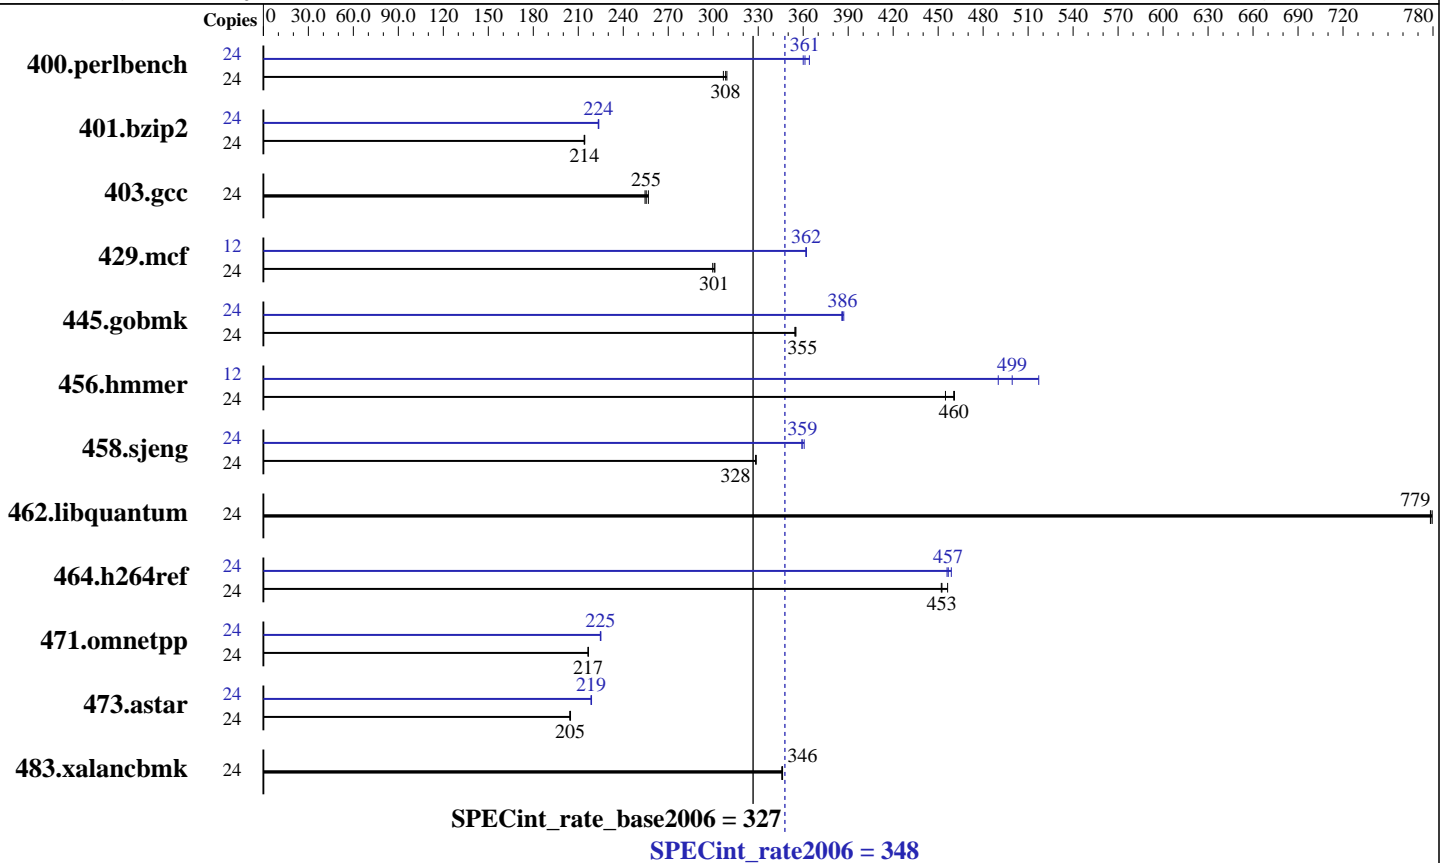

Hardware

CPU Name: Intel Xeon X5660
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6x8 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 348

PRIMERGY BX920 S2, Intel Xeon X5660, 2.80 GHz

SPECint_rate_base2006 = 327

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2010
Hardware Availability: Aug-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	759	309	<u>761</u>	<u>308</u>	764	307	24	644	364	651	360	<u>649</u>	<u>361</u>
401.bzip2	24	1082	214	1081	214	<u>1082</u>	<u>214</u>	24	<u>1036</u>	<u>224</u>	1037	223	1036	224
403.gcc	24	<u>757</u>	<u>255</u>	759	255	752	257	24	<u>757</u>	<u>255</u>	759	255	752	257
429.mcf	24	730	300	727	301	<u>728</u>	<u>301</u>	12	302	362	303	362	<u>302</u>	<u>362</u>
445.gobmk	24	<u>709</u>	<u>355</u>	710	354	709	355	24	653	386	650	387	<u>652</u>	<u>386</u>
456.hammer	24	492	455	486	461	<u>486</u>	<u>460</u>	12	217	517	<u>224</u>	<u>499</u>	228	490
458.sjeng	24	884	328	<u>884</u>	<u>328</u>	884	329	24	<u>808</u>	<u>359</u>	808	359	805	361
462.libquantum	24	<u>639</u>	<u>779</u>	639	778	638	779	24	<u>639</u>	<u>779</u>	639	778	638	779
464.h264ref	24	<u>1174</u>	<u>453</u>	1175	452	1164	456	24	1165	456	<u>1163</u>	<u>457</u>	1158	459
471.omnetpp	24	692	217	<u>692</u>	<u>217</u>	693	217	24	667	225	668	225	<u>667</u>	<u>225</u>
473.astar	24	825	204	823	205	<u>823</u>	<u>205</u>	24	771	219	770	219	<u>770</u>	<u>219</u>
483.xalancbmk	24	<u>478</u>	<u>346</u>	479	346	478	346	24	<u>478</u>	<u>346</u>	479	346	478	346

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
Data Reuse Optimization = Disable
Performance/Power Setting = Traditional

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 348

PRIMERGY BX920 S2, Intel Xeon X5660, 2.80 GHz

SPECint_rate_base2006 = 327

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2010
Hardware Availability: Aug-2010
Software Availability: Jan-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmarheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 348

PRIMERGY BX920 S2, Intel Xeon X5660, 2.80 GHz

SPECint_rate_base2006 = 327

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2010
Hardware Availability: Aug-2010
Software Availability: Jan-2010

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: basepeak = yes
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 348

PRIMERGY BX920 S2, Intel Xeon X5660, 2.80 GHz

SPECint_rate_base2006 = 327

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:25:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 July 2010.