



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120b
(Intel Xeon E5506)

SPECfp®_rate2006 = 62.3

SPECfp_rate_base2006 = 60.5

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

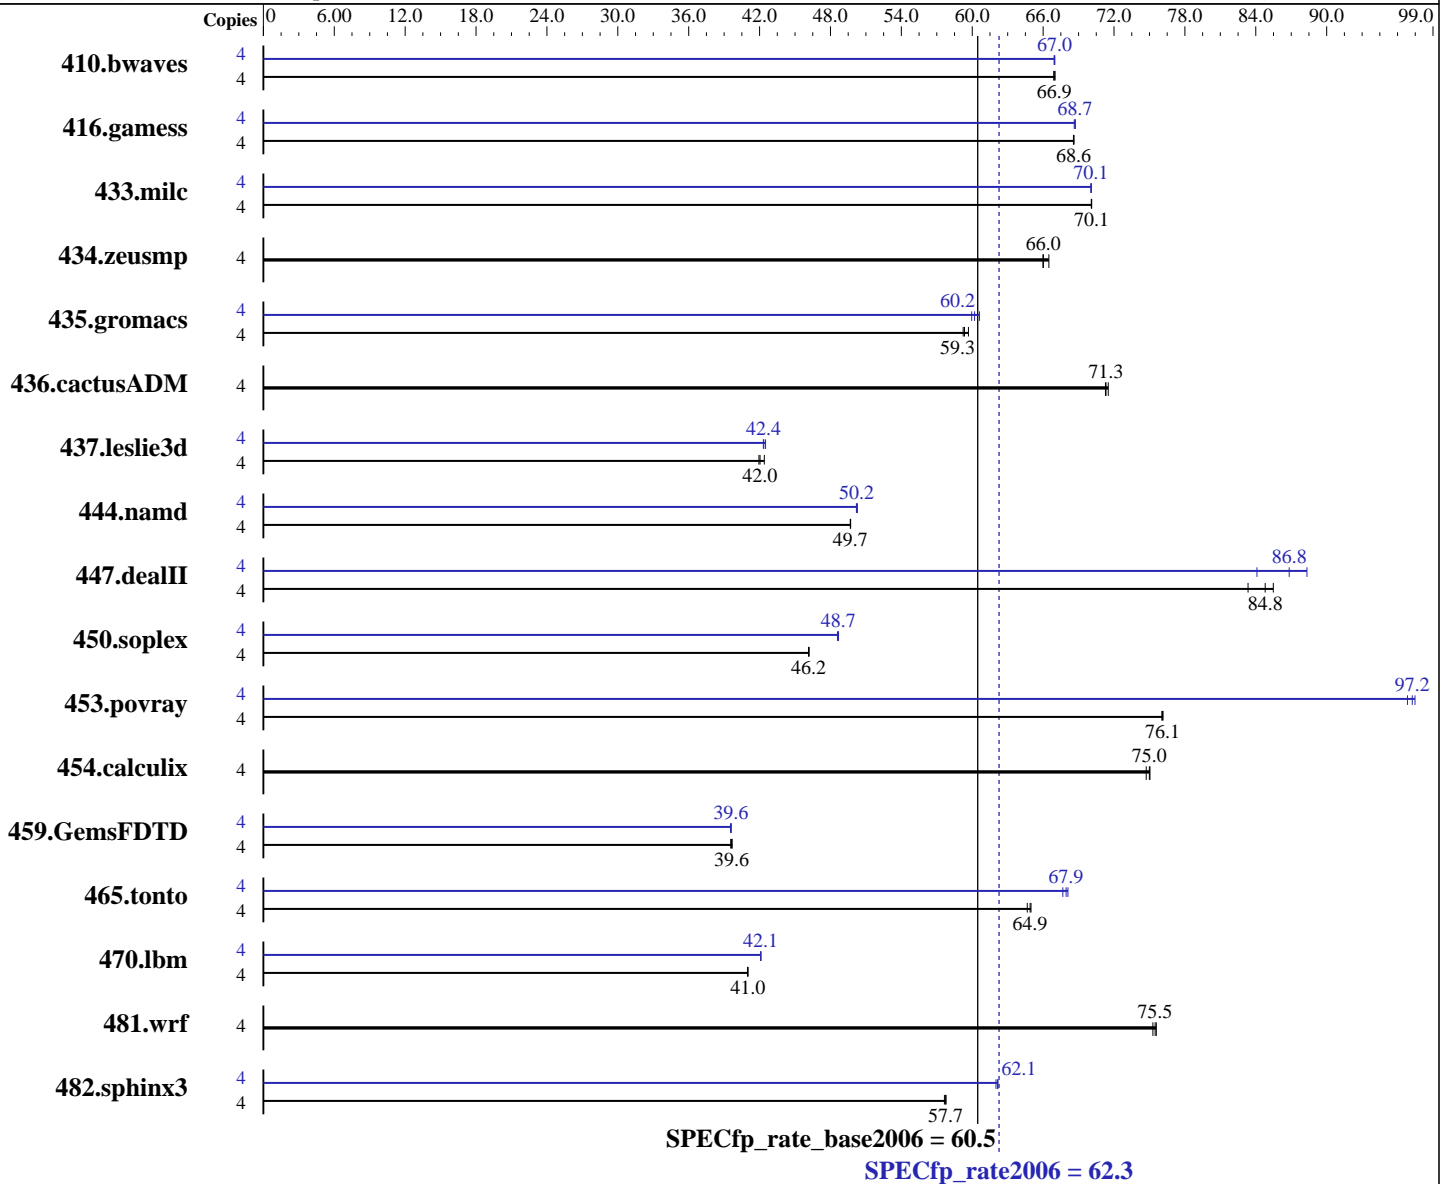

Hardware

CPU Name: Intel Xeon E5506
 CPU Characteristics:
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64),
Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for
IA32 and Intel 64, Version 11.1
Build 20091130 Package ID: l_cproc_p_11.1.064,
l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120b
(Intel Xeon E5506)

SPECfp_rate2006 = **62.3**

SPECfp_rate_base2006 = 60.5

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB PC3L-10600R, 2 rank, CL9, ECC, running at 800 MHz)
Disk Subsystem: 1x160 GB SATA, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	813	66.9	812	66.9	811	67.0	4	812	66.9	812	67.0	812	67.0		
416.gamess	4	1141	68.6	1142	68.6	1142	68.6	4	1140	68.7	1140	68.7	1141	68.6		
433.milc	4	524	70.1	524	70.1	524	70.1	4	524	70.1	524	70.0	524	70.1		
434.zeusmp	4	551	66.0	552	66.0	547	66.5	4	551	66.0	552	66.0	547	66.5		
435.gromacs	4	481	59.3	479	59.7	482	59.2	4	474	60.2	471	60.6	476	60.0		
436.cactusADM	4	668	71.5	670	71.3	671	71.3	4	668	71.5	670	71.3	671	71.3		
437.leslie3d	4	887	42.4	894	42.0	896	41.9	4	885	42.5	888	42.3	888	42.4		
444.namd	4	645	49.7	646	49.7	646	49.7	4	638	50.3	639	50.2	639	50.2		
447.dealII	4	549	83.3	535	85.5	540	84.8	4	518	88.3	544	84.1	527	86.8		
450.soplex	4	723	46.1	722	46.2	723	46.2	4	686	48.7	685	48.7	687	48.6		
453.povray	4	280	76.0	280	76.1	279	76.1	4	219	97.2	218	97.5	220	96.8		
454.calculix	4	440	75.0	440	75.0	442	74.7	4	440	75.0	440	75.0	442	74.7		
459.GemsFDTD	4	1069	39.7	1071	39.6	1073	39.6	4	1073	39.5	1072	39.6	1072	39.6		
465.tonto	4	609	64.7	606	64.9	606	65.0	4	582	67.7	579	67.9	578	68.1		
470.lbm	4	1341	41.0	1340	41.0	1340	41.0	4	1306	42.1	1305	42.1	1305	42.1		
481.wrf	4	593	75.3	591	75.6	592	75.5	4	593	75.3	591	75.6	592	75.5		
482.sphinx3	4	1352	57.6	1350	57.7	1349	57.8	4	1254	62.1	1254	62.2	1257	62.0		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Default BIOS settings were used.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120b
(Intel Xeon E5506)

SPECfp_rate2006 = 62.3

SPECfp_rate_base2006 = 60.5

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2010
Hardware Availability: Jun-2010
Software Availability: Dec-2009

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120b
(Intel Xeon E5506)

SPECfp_rate2006 = 62.3

SPECfp_rate_base2006 = 60.5

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120b
(Intel Xeon E5506)

SPECfp_rate2006 = 62.3

SPECfp_rate_base2006 = 60.5

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120b
(Intel Xeon E5506)

SPECfp_rate2006 = 62.3

SPECfp_rate_base2006 = 60.5

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2010
Hardware Availability: Jun-2010
Software Availability: Dec-2009

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:31:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2010.