SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 730 Express (3.55 GHz, 16 core)

SPECint®_rate2006 = 575

SPECint_rate_base2006 = 507

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2010
Hardware Availability: Sep-2010
Software Availability: Sep-2010

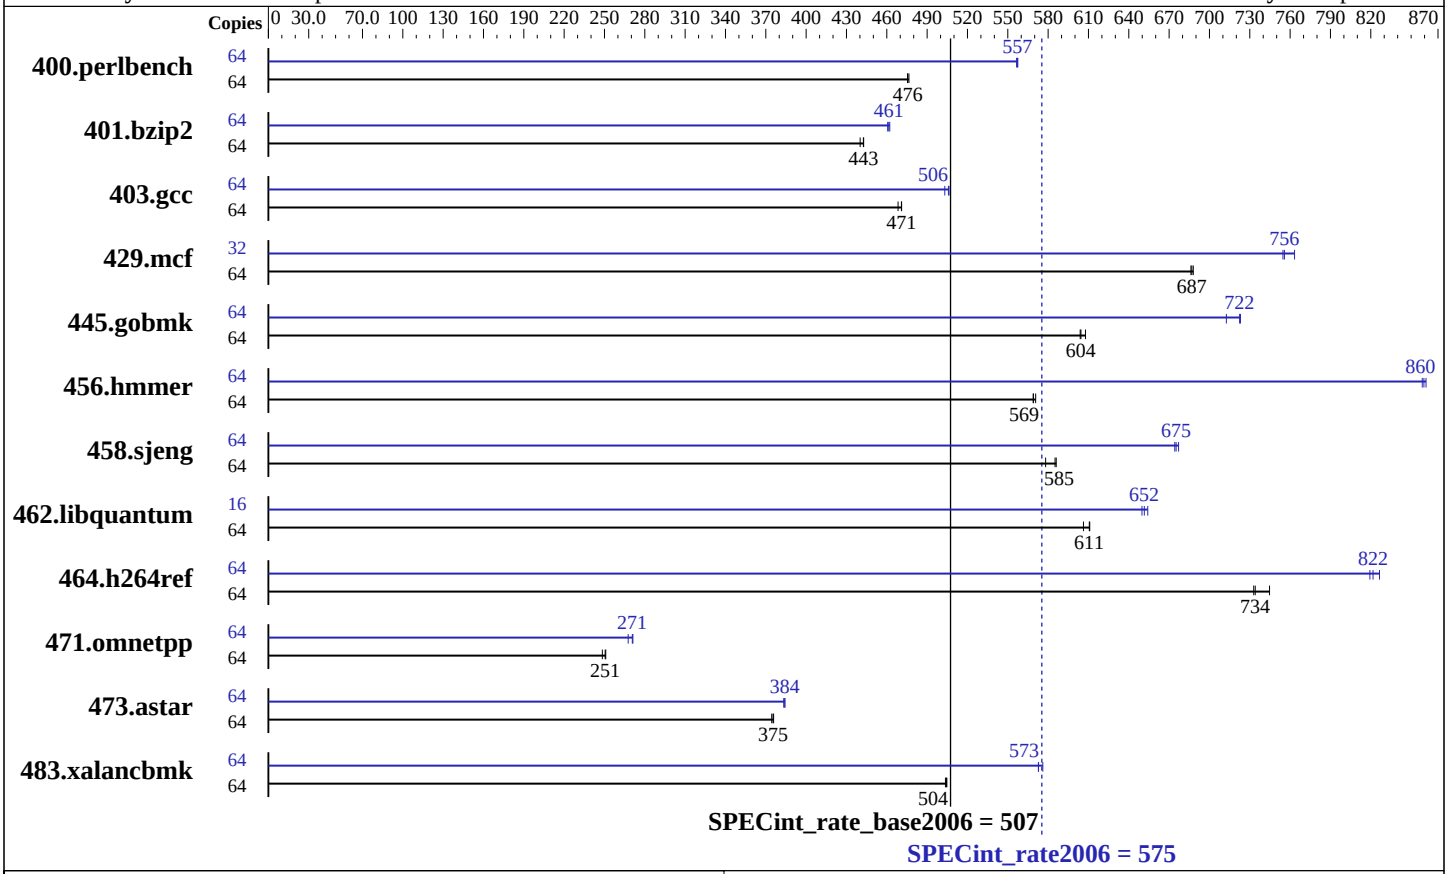

Hardware

CPU Name:	POWER7
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.86 GHz
CPU MHz:	3556
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable:	16 cores
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per core
Other Cache:	None
Memory:	128 GB (16x8 GB) DDR3 1066 MHz
Disk Subsystem:	2x146.8 GB SAS SFF 15K RPM
Other Hardware:	None

Software

Operating System:	IBM AIX V7.1
Compiler:	IBM XL C/C++ for AIX, V11.1 Version: 11.01.0000.0002
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1312	476	1315	475	**1315**	**476**	64	**1122**	**557**	1124	557	1122	557
401.bzip2	64	1403	440	1395	443	**1395**	**443**	64	1341	461	**1338**	**461**	1336	462
403.gcc	64	**1094**	**471**	1100	468	1094	471	64	**1018**	**506**	1018	506	1024	503
429.mcf	64	**850**	**687**	848	688	851	686	32	382	763	**386**	**756**	387	755
445.gobmk	64	**1111**	**604**	1105	608	1112	604	64	928	723	**929**	**722**	942	713
456.hmmer	64	1050	569	1046	571	**1049**	**569**	64	696	858	693	861	**695**	**860**
458.sjeng	64	1321	586	1339	578	**1323**	**585**	64	1144	677	1149	674	**1147**	**675**
462.libquantum	64	**2172**	**611**	2170	611	2187	606	16	507	654	**509**	**652**	510	650
464.h264ref	64	1902	745	**1929**	**734**	1932	733	64	1714	826	1729	819	**1724**	**822**
471.omnetpp	64	1594	251	**1597**	**251**	1610	248	64	**1478**	**271**	1475	271	1495	268
473.astar	64	1200	374	**1197**	**375**	1195	376	64	**1170**	**384**	1172	383	1169	384
483.xalancbmk	64	**876**	**504**	877	504	875	505	64	771	573	767	576	**771**	**573**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```
fdpr binary optimization tool used for 401.bzip2
 with options -O4 -sdp 9 -rtb -vrox -nodp -m power7
fdpr binary optimization tool used for:
   403.gcc 429.mcf 445.gobmk 458.sjeng
 with options -O3 -m power7
fdpr binary optimization tool used for 456.hmmer
 with options -O3 -lu -1 -nodp -sdp 9 -m power7
fdpr binary optimization tool used for 462.libquantum
 with options -O4 -nodp -m power7
fdpr binary optimization tool used for 471.omnetpp
 with options -O4 -nodp -m power7 -vrox
fdpr binary optimization tool used for 473.astar
 with options -O4 -sdp 9 -vrox -dp -m power7
```

Submit Notes

```
The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).
```

Operating System Notes

```
Environment variables set by runspec before the start of the run:
  MALLOCOPTIONS = "pool"
  MEMORY_AFFINITY = "MCM"
  XLFRTEOPTS = "intrinthds=1"
```

Continued on next page

Operating System Notes (Continued)

```
All ulimits set to unlimited.
12800 16M large pages defined with vmo command

See the flags file for details on settings.
```

Base Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_AIX`
462.libquantum: `-DSPEC_CPU_AIX`
464.h264ref: `-DSPEC_CPU_AIX -qchars=signed`
483.xalancbmk: `-DSPEC_CPU_AIX`

Base Optimization Flags

C benchmarks:
```
-qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage -qsimd -qvecnvol
-D_ILS_MACROS -qalias=noansi -qalloca -blpdata
```

C++ benchmarks:
```
-qipa=threads -bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O2 -qarch=auto -qtune=auto -D_ILS_MACROS
-qalias=noansi -blpdata -btextpsize:64K

401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvol -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
-D_ILS_MACROS -qalloca -blpdata -btextpsize:64K

429.mcf: Same as 401.bzip2

445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

456.hmmer: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign
-D_ILS_MACROS -blpdata -btextpsize:64K

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -blpdata -btextpsize:64K

462.libquantum: -O5 -q64 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4 -D_ILS_MACROS -qalign=natural -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qinlglue -qalign=natural -blpdata -btextpsize:64K

483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd -qvecnvol -qarch=pwr5 -qtune=pwr5 -qlargepage -D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks (except as noted below):
-qipa=noobject -qsuppress=1500-036

400.perlbench: -qsuppress=1500-036

403.gcc: -qsuppress=1500-036

462.libquantum: -qsuppress=1500-036

C++ benchmarks (except as noted below):
-qipa=noobject -qsuppress=1500-036

471.omnetpp: -qsuppress=1500-036

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/IBM-XL.20100901.html
http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/IBM-XL.20100901.xml
http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:24:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.