



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint<sup>®</sup>\_rate2006 = 353

PowerEdge R715 (AMD Opteron 6168, 1.90 GHz)

SPECint\_rate\_base2006 = 307

CPU2006 license: 55


Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

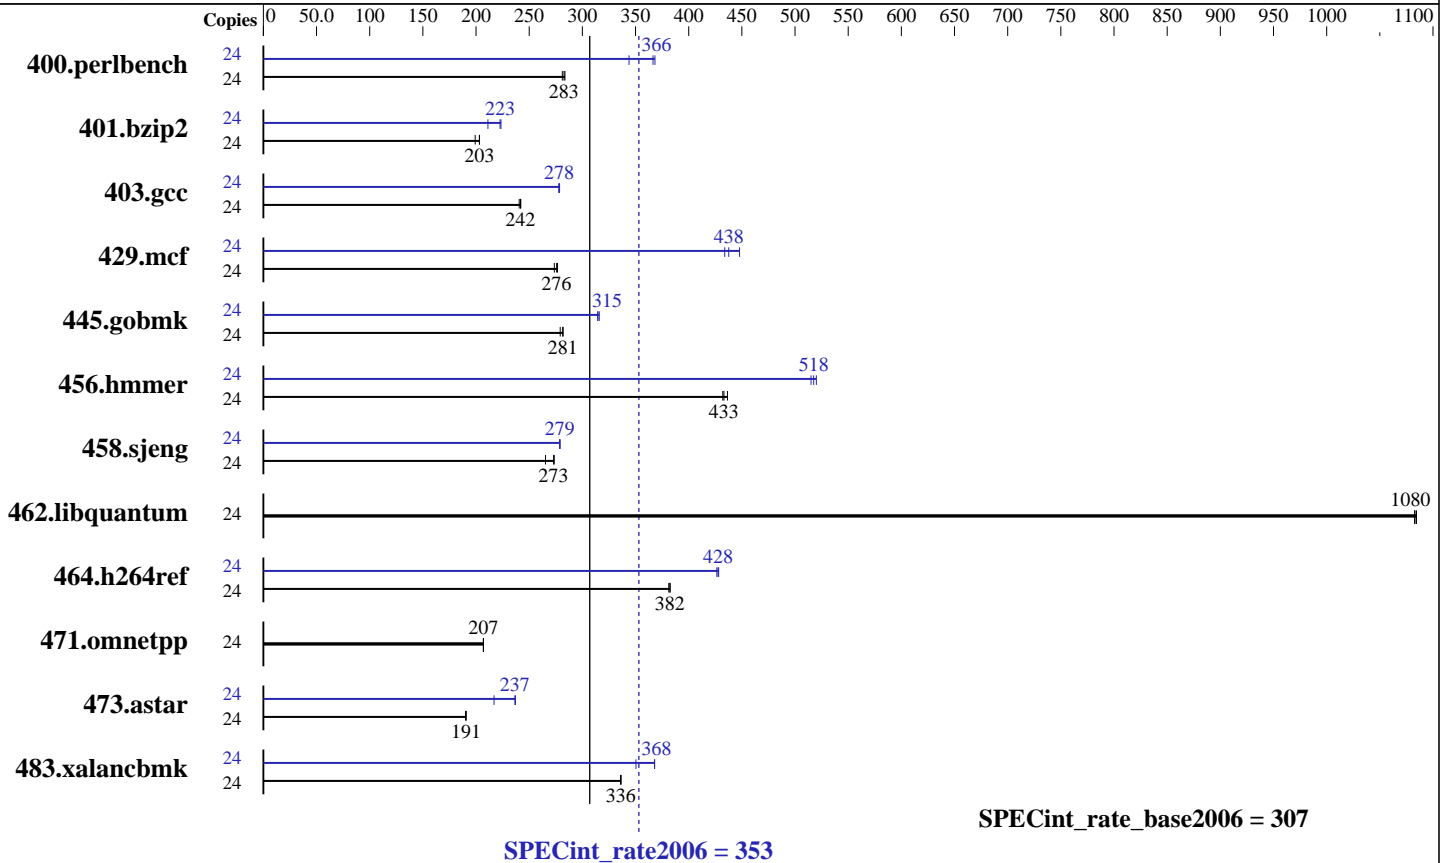

### Hardware

CPU Name: AMD Opteron 6168  
 CPU Characteristics:  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)  
 Disk Subsystem: 1 x 146 GB SAS 10000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 353

PowerEdge R715 (AMD Opteron 6168, 1.90 GHz)

SPECint\_rate\_base2006 = 307

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b><u>829</u></b>	<b><u>283</u></b>	834	281	827	284	24	682	344	<b><u>640</u></b>	<b><u>366</u></b>	637	368
401.bzip2	24	1163	199	1139	203	<b><u>1140</u></b>	<b><u>203</u></b>	24	1097	211	<b><u>1041</u></b>	<b><u>223</u></b>	1036	223
403.gcc	24	798	242	803	241	<b><u>799</u></b>	<b><u>242</u></b>	24	695	278	<b><u>695</u></b>	<b><u>278</u></b>	694	279
429.mcf	24	<b><u>794</u></b>	<b><u>276</u></b>	791	277	800	274	24	489	448	<b><u>500</u></b>	<b><u>438</u></b>	504	434
445.gobmk	24	<b><u>894</u></b>	<b><u>281</u></b>	893	282	902	279	24	<b><u>800</u></b>	<b><u>315</u></b>	801	314	797	316
456.hammer	24	<b><u>517</u></b>	<b><u>433</u></b>	513	436	518	432	24	435	515	<b><u>433</u></b>	<b><u>518</u></b>	431	520
458.sjeng	24	1062	274	<b><u>1064</u></b>	<b><u>273</u></b>	1094	265	24	1042	279	<b><u>1041</u></b>	<b><u>279</u></b>	1041	279
462.libquantum	24	<b><u>459</u></b>	<b><u>1080</u></b>	459	1080	459	1080	24	<b><u>459</u></b>	<b><u>1080</u></b>	459	1080	459	1080
464.h264ref	24	1393	381	1388	383	<b><u>1389</u></b>	<b><u>382</u></b>	24	1245	426	1240	428	<b><u>1242</u></b>	<b><u>428</u></b>
471.omnetpp	24	<b><u>725</u></b>	<b><u>207</u></b>	725	207	725	207	24	<b><u>725</u></b>	<b><u>207</u></b>	725	207	725	207
473.astar	24	886	190	884	191	<b><u>884</u></b>	<b><u>191</u></b>	24	<b><u>712</u></b>	<b><u>237</u></b>	711	237	777	217
483.xalancbmk	24	<b><u>493</u></b>	<b><u>336</u></b>	492	336	493	336	24	473	350	450	368	<b><u>450</u></b>	<b><u>368</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=10800 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 353

PowerEdge R715 (AMD Opteron 6168, 1.90 GHz)

SPECint\_rate\_base2006 = 307

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2010  
Hardware Availability: Mar-2010  
Software Availability: Jul-2010

## Base Compiler Invocation

C benchmarks:  
opencc  
  
C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -mso -Ofast -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m  
  
C++ benchmarks:  
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on  
-CG:cmp\_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc  
  
C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 353

PowerEdge R715 (AMD Opteron 6168, 1.90 GHz)

SPECint\_rate\_base2006 = 307

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
 -LNO:ignore\_feedback=off -CG:p2align=on  
 -CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:local\_sched\_alg=1 -CG:cflow=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
 -HP:bdt=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 353

PowerEdge R715 (AMD Opteron 6168, 1.90 GHz)

SPECint\_rate\_base2006 = 307

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
 -LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: basepeak = yes

464.h264ref: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
 -WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
 -OPT:alias=disjoint -INLINE:aggressive=on  
 -IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
 -CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
 -fno-emit-exceptions  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
 For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
 Report generated on Wed Jul 23 12:51:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
 Originally published on 28 September 2010.