



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECint®\_rate2006 = 238

BladeSymphony BS320 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 224

CPU2006 license: 872


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

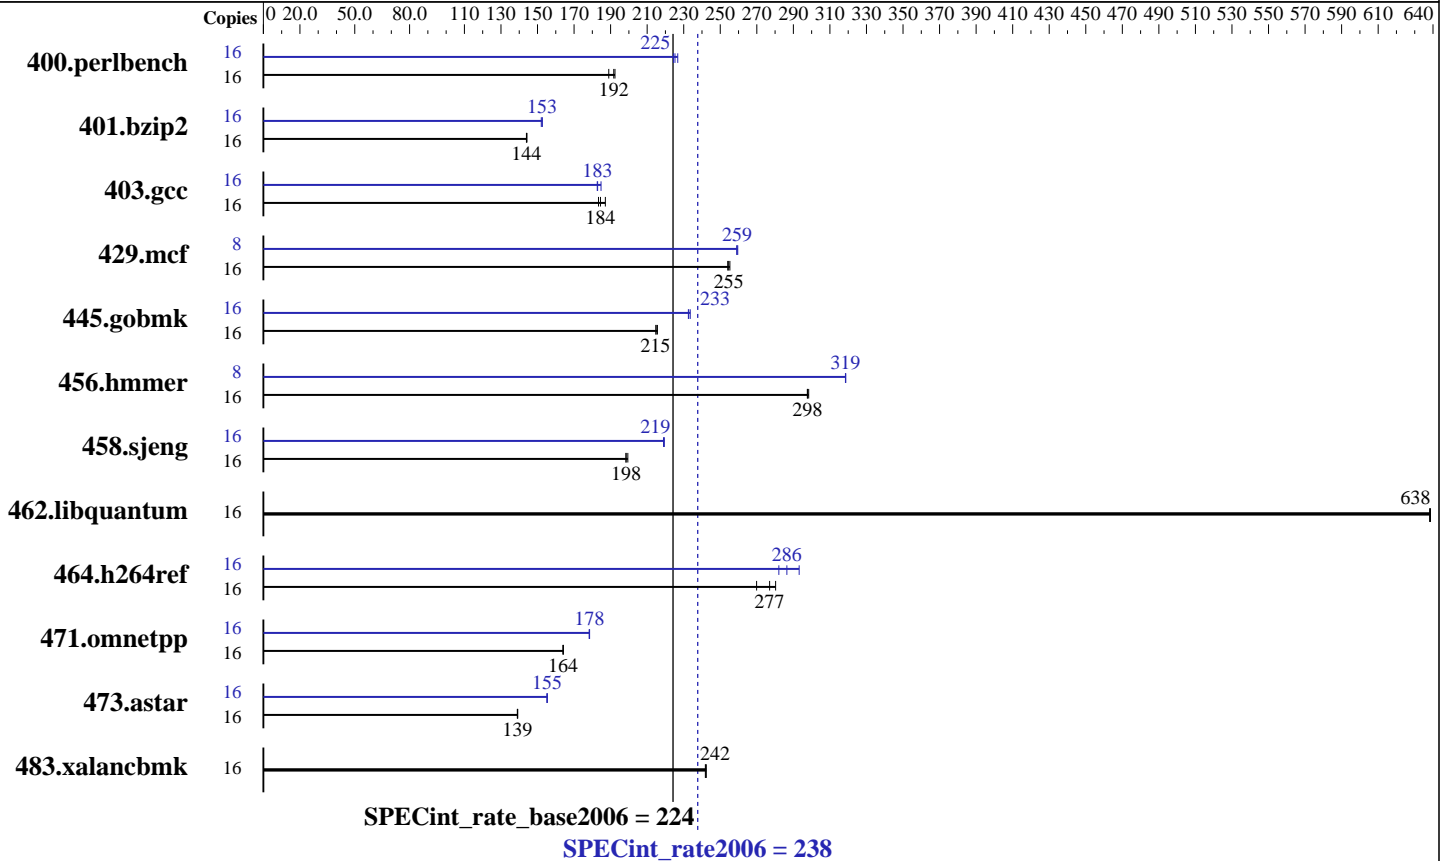

### Hardware

CPU Name: Intel Xeon E5640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB(6 x 4 GB PC3-10600R, 2 rank, CL9-9-9)  
 Disk Subsystem: 1 x 73 GB 10000 rpm SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86\_64  
 Compiler: Intel C++ Compiler 11.1 for Linux Build 20091012 Package ID: l\_cproc\_p\_11.1.059  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-user run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECint\_rate2006 = 238

BladeSymphony BS320 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 224

CPU2006 license: 872  
Test sponsor: HITACHI  
Tested by: HITACHI

Test date: Jun-2010  
Hardware Availability: Mar-2010  
Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>815</b>	<b>192</b>	827	189	813	192	16	689	227	<b>694</b>	<b>225</b>	697	224
401.bzip2	16	<b>1072</b>	<b>144</b>	1073	144	1071	144	16	1015	152	<b>1012</b>	<b>153</b>	1012	153
403.gcc	16	702	183	<b>698</b>	<b>184</b>	688	187	16	705	183	<b>704</b>	<b>183</b>	697	185
429.mcf	16	574	254	572	255	<b>573</b>	<b>255</b>	8	282	259	281	260	<b>281</b>	<b>259</b>
445.gobmk	16	778	216	<b>781</b>	<b>215</b>	781	215	16	719	234	<b>721</b>	<b>233</b>	722	233
456.hammer	16	<b>501</b>	<b>298</b>	502	298	500	298	8	234	319	<b>234</b>	<b>319</b>	234	318
458.sjeng	16	<b>975</b>	<b>198</b>	971	199	976	198	16	<b>883</b>	<b>219</b>	883	219	884	219
462.libquantum	16	519	639	519	638	<b>519</b>	<b>638</b>	16	519	639	519	638	<b>519</b>	<b>638</b>
464.h264ref	16	1263	280	1312	270	<b>1278</b>	<b>277</b>	16	<b>1236</b>	<b>286</b>	1208	293	1255	282
471.omnetpp	16	610	164	609	164	<b>610</b>	<b>164</b>	16	<b>560</b>	<b>178</b>	560	178	561	178
473.astar	16	807	139	808	139	<b>807</b>	<b>139</b>	16	724	155	<b>723</b>	<b>155</b>	723	155
483.xalancbmk	16	<b>456</b>	<b>242</b>	456	242	456	242	16	<b>456</b>	<b>242</b>	456	242	456	242

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'/usr/bin/numactl' used to bind processes to CPUs

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint\_rate2006 = 238**

**BladeSymphony BS320 (Intel Xeon E5640)**

**SPECint\_rate\_base2006 = 224**

**CPU2006 license:** 872

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Jun-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Dec-2009

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/bsc/smartheap/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint\_rate2006 = 238**

**BladeSymphony BS320 (Intel Xeon E5640)**

**SPECint\_rate\_base2006 = 224**

**CPU2006 license:** 872

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Jun-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/bsc/smartheap/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
 -L/home/bsc/smartheap/lib -lsmartheap64

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint\_rate2006 = 238

BladeSymphony BS320 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 224

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 12:45:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 September 2010.