



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECint®2006 = 28.1**

PRIMERGY TX200 S6, Intel Xeon E5607, 2.27 GHz

**SPECint\_base2006 = 27.0**

CPU2006 license: 19


Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

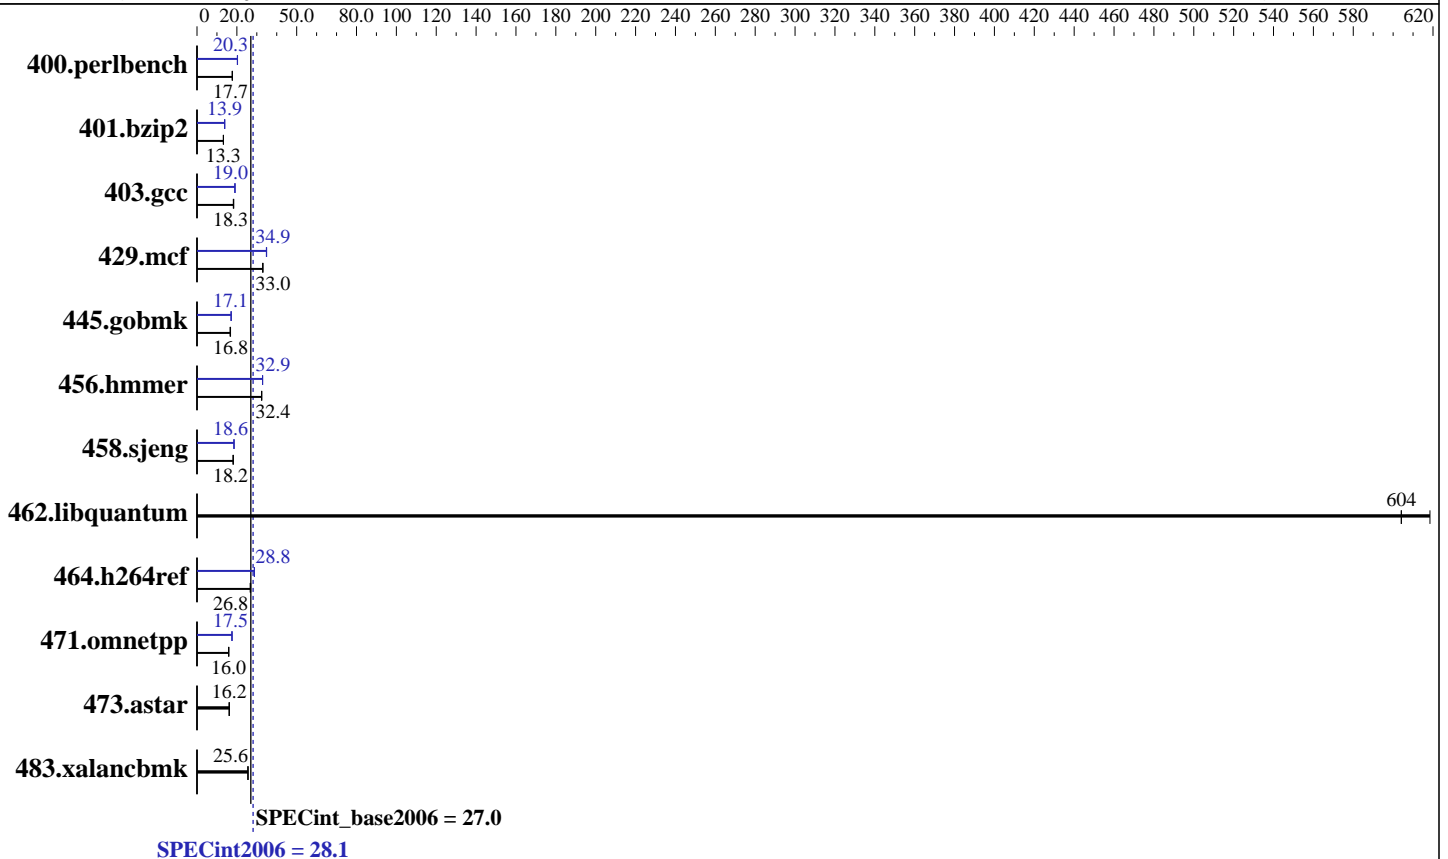

### Hardware

CPU Name: Intel Xeon E5607  
 CPU Characteristics:  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz and CL7)  
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
 Other Hardware: --

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint2006 = **28.1**

PRIMERGY TX200 S6, Intel Xeon E5607, 2.27 GHz

SPECint\_base2006 = **27.0**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b><u>551</u></b>	<b><u>17.7</u></b>	552	17.7	551	17.7	480	20.3	482	20.3	<b><u>482</u></b>	<b><u>20.3</u></b>
401.bzip2	729	13.2	<b><u>728</u></b>	<b><u>13.3</u></b>	728	13.3	695	13.9	695	13.9	<b><u>695</u></b>	<b><u>13.9</u></b>
403.gcc	<b><u>439</u></b>	<b><u>18.3</u></b>	437	18.4	442	18.2	<b><u>423</u></b>	<b><u>19.0</u></b>	423	19.0	423	19.0
429.mcf	<b><u>276</u></b>	<b><u>33.0</u></b>	276	33.0	276	33.0	262	34.8	261	34.9	<b><u>262</u></b>	<b><u>34.9</u></b>
445.gobmk	633	16.6	624	16.8	<b><u>624</u></b>	<b><u>16.8</u></b>	612	17.1	612	17.1	<b><u>612</u></b>	<b><u>17.1</u></b>
456.hammer	<b><u>288</u></b>	<b><u>32.4</u></b>	288	32.4	288	32.4	<b><u>284</u></b>	<b><u>32.9</u></b>	284	32.9	283	32.9
458.sjeng	667	18.1	666	18.2	<b><u>666</u></b>	<b><u>18.2</u></b>	652	18.6	<b><u>652</u></b>	<b><u>18.6</u></b>	652	18.6
462.libquantum	<b><u>34.3</u></b>	<b><u>604</u></b>	33.5	618	34.3	604	<b><u>34.3</u></b>	<b><u>604</u></b>	33.5	618	34.3	604
464.h264ref	828	26.7	821	26.9	<b><u>827</u></b>	<b><u>26.8</u></b>	768	28.8	769	28.8	<b><u>769</u></b>	<b><u>28.8</u></b>
471.omnetpp	392	16.0	<b><u>392</u></b>	<b><u>16.0</u></b>	395	15.8	<b><u>356</u></b>	<b><u>17.5</u></b>	356	17.5	356	17.6
473.astar	434	16.2	434	16.2	<b><u>434</u></b>	<b><u>16.2</u></b>	434	16.2	434	16.2	<b><u>434</u></b>	<b><u>16.2</u></b>
483.xalancbmk	270	25.6	<b><u>270</u></b>	<b><u>25.6</u></b>	270	25.5	270	25.6	<b><u>270</u></b>	<b><u>25.6</u></b>	270	25.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable

## General Notes

OMP\_NUM\_THREADS set to number of cores  
For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 28.1**

PRIMERGY TX200 S6, Intel Xeon E5607, 2.27 GHz

**SPECint\_base2006 = 27.0**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jan-2011

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap64  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 28.1**

PRIMERGY TX200 S6, Intel Xeon E5607, 2.27 GHz

**SPECint\_base2006 = 27.0**

CPU2006 license: 19

Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32  
 -B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32 -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -auto-ilp32 -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
 -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 28.1

PRIMERGY TX200 S6, Intel Xeon E5607, 2.27 GHz

SPECint\_base2006 = 27.0

CPU2006 license: 19

Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 28.1

PRIMERGY TX200 S6, Intel Xeon E5607, 2.27 GHz

SPECint\_base2006 = 27.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 19:22:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 April 2011.