



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp<sup>®</sup>\_rate2006 = 219

## Gateway GR360 F1 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 215

CPU2006 license: 97


Test date: May-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

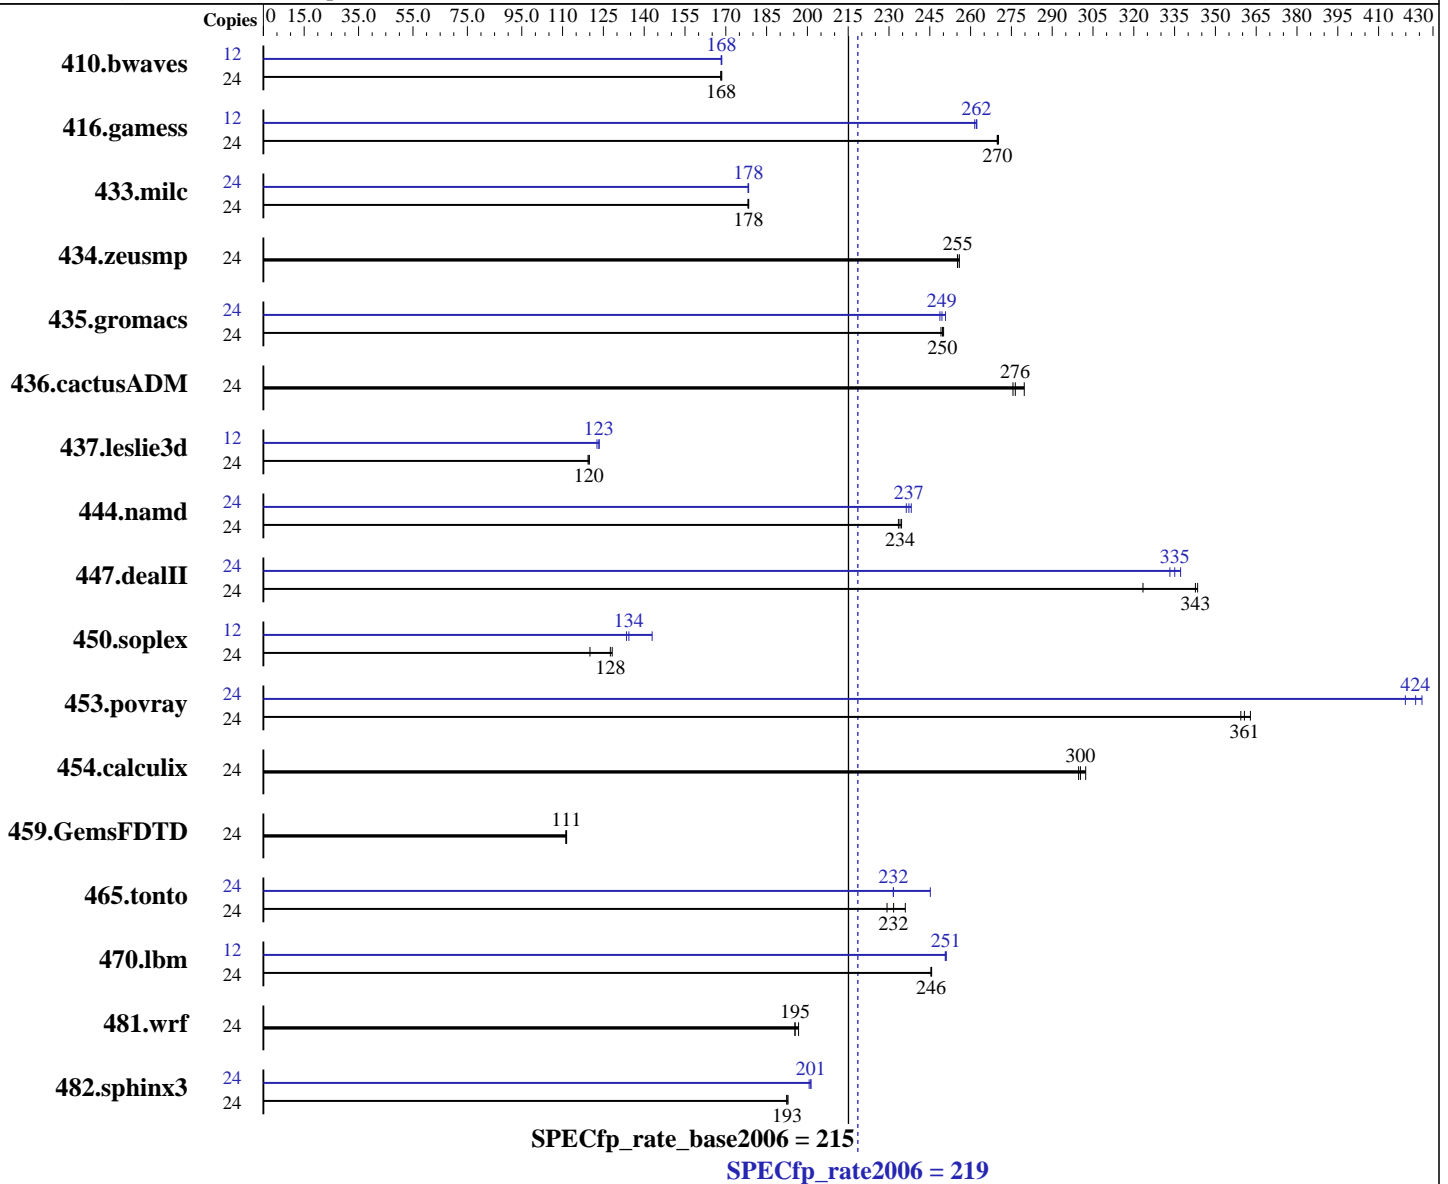

### Hardware

CPU Name: Intel Xeon E5649  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 219

Gateway GR360 F1 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 215

CPU2006 license: 97

Test date: May-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 300 GB SATA, 10000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1940	168	1935	169	<u>1938</u>	<u>168</u>	12	<u>968</u>	<u>168</u>	969	168	968	169
416.gamess	24	1742	270	1739	270	<u>1741</u>	<u>270</u>	12	<u>896</u>	<u>262</u>	898	262	896	262
433.milc	24	<u>1235</u>	<u>178</u>	1237	178	1235	178	24	1237	178	<u>1235</u>	<u>178</u>	1235	178
434.zeusmp	24	<u>856</u>	<u>255</u>	854	256	856	255	24	<u>856</u>	<u>255</u>	854	256	856	255
435.gromacs	24	685	250	<u>686</u>	<u>250</u>	688	249	24	683	251	<u>687</u>	<u>249</u>	689	249
436.cactusADM	24	1025	280	1041	276	<u>1038</u>	<u>276</u>	24	1025	280	1041	276	<u>1038</u>	<u>276</u>
437.leslie3d	24	1883	120	<u>1885</u>	<u>120</u>	1890	119	12	920	123	<u>915</u>	<u>123</u>	914	123
444.namd	24	820	235	<u>822</u>	<u>234</u>	824	233	24	808	238	<u>811</u>	<u>237</u>	814	236
447.dealII	24	799	343	849	323	<u>801</u>	<u>343</u>	24	<u>819</u>	<u>335</u>	824	333	814	337
450.soplex	24	1667	120	<u>1569</u>	<u>128</u>	1561	128	12	750	133	<u>745</u>	<u>134</u>	700	143
453.povray	24	<u>354</u>	<u>361</u>	355	359	352	363	24	304	420	300	426	<u>301</u>	<u>424</u>
454.calculix	24	655	302	661	300	<u>659</u>	<u>300</u>	24	655	302	661	300	<u>659</u>	<u>300</u>
459.GemsFDTD	24	2290	111	<u>2286</u>	<u>111</u>	2284	111	24	2290	111	<u>2286</u>	<u>111</u>	2284	111
465.tonto	24	1030	229	1001	236	<u>1019</u>	<u>232</u>	24	1020	232	963	245	<u>1019</u>	<u>232</u>
470.lbm	24	1342	246	1344	245	<u>1343</u>	<u>246</u>	12	657	251	<u>657</u>	<u>251</u>	658	251
481.wrf	24	1362	197	<u>1371</u>	<u>195</u>	1372	195	24	1362	197	<u>1371</u>	<u>195</u>	1372	195
482.sphinx3	24	2432	192	2425	193	<u>2429</u>	<u>193</u>	24	2331	201	<u>2324</u>	<u>201</u>	2324	201

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Balanced)  
Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 219

Gateway GR360 F1 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 215

CPU2006 license: 97

Test date: May-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

## General Notes

Binaries compiled on RHEL5.5

This result was measured on the Gateway GR380 F1.

The Acer AR360 F1, AR380 F1, Gateway GR360 F1 are electronically equivalent

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 219

Gateway GR360 F1 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 215

CPU2006 license: 97

Test date: May-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 219**

**Gateway GR360 F1 (Intel Xeon E5649)**

**SPECfp\_rate\_base2006 = 215**

**CPU2006 license:** 97

**Test date:** May-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Feb-2011

**Tested by:** Acer Incorporated

**Software Availability:** Jan-2011

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 219**

**Gateway GR360 F1 (Intel Xeon E5649)**

**SPECfp\_rate\_base2006 = 215**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.20110608.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.20110608.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 18:00:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 June 2011.