



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 36.3

IBM System x3850 X5 (Intel Xeon E7-8837)

SPECint_base2006 = 34.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

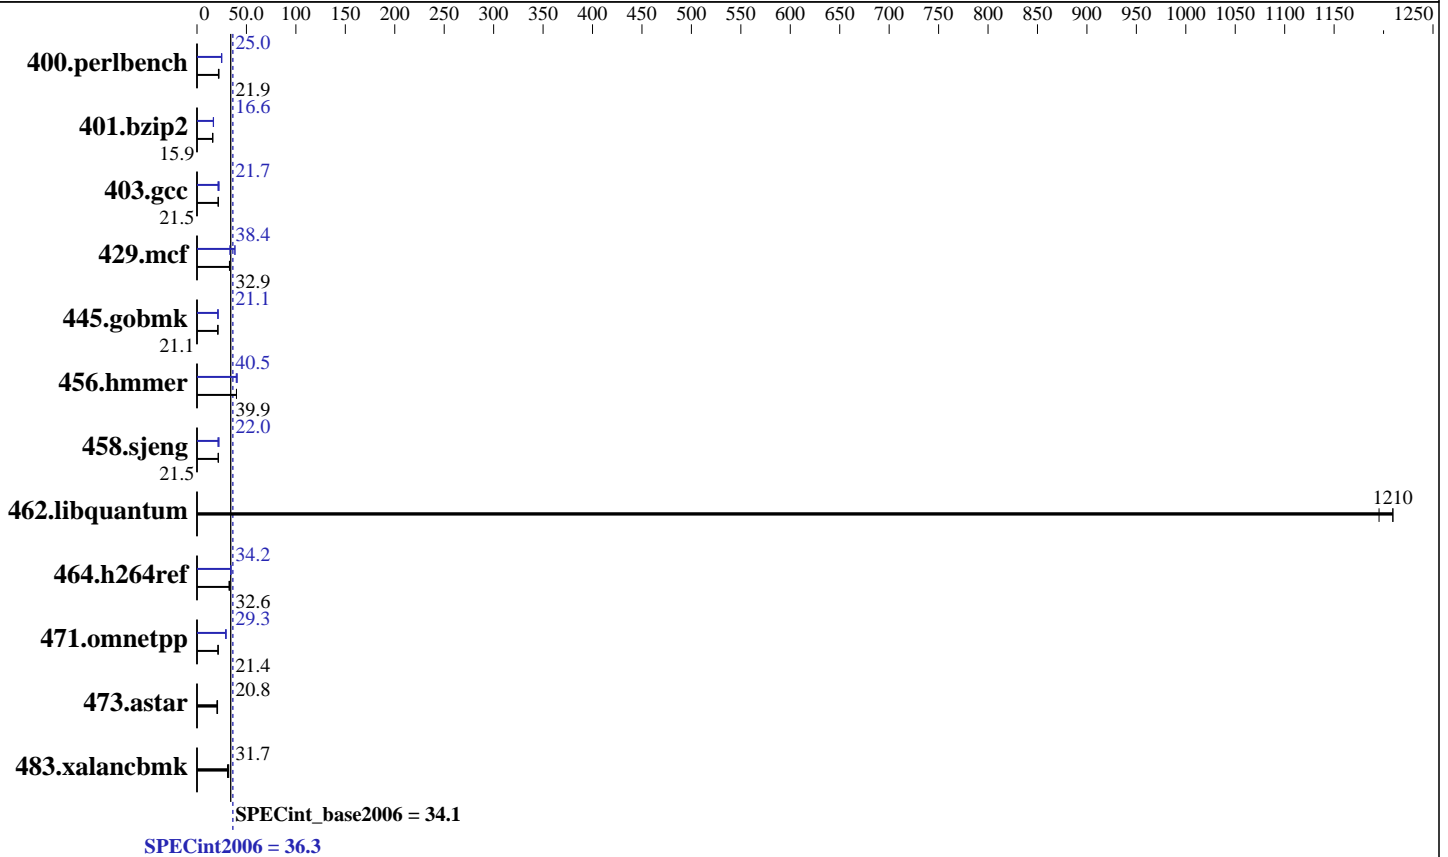

Hardware

CPU Name: Intel Xeon E7-8837
 CPU Characteristics: Intel Turbo Boost Technology up to 2.8 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC)
 Disk Subsystem: 2 x 147 GB 15k RPM SAS, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 36.3

IBM System x3850 X5 (Intel Xeon E7-8837)

SPECint_base2006 = 34.1

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	451	21.7	440	22.2	446	21.9	390	25.0	395	24.7	391	25.0
401.bzip2	608	15.9	608	15.9	608	15.9	577	16.7	582	16.6	582	16.6
403.gcc	374	21.5	375	21.5	374	21.5	360	22.4	370	21.7	379	21.2
429.mcf	277	32.9	278	32.9	278	32.8	275	33.2	238	38.4	238	38.4
445.gobmk	497	21.1	497	21.1	497	21.1	491	21.4	496	21.1	497	21.1
456.hammer	234	39.9	234	39.9	234	39.9	231	40.5	235	39.7	230	40.5
458.sjeng	561	21.6	562	21.5	562	21.5	551	22.0	572	21.2	546	22.2
462.libquantum	17.3	1200	17.1	1210	17.1	1210	17.3	1200	17.1	1210	17.1	1210
464.h264ref	678	32.6	679	32.6	675	32.8	645	34.3	648	34.2	650	34.0
471.omnetpp	296	21.1	291	21.4	292	21.4	213	29.4	213	29.3	216	29.0
473.astar	338	20.8	349	20.1	338	20.8	338	20.8	349	20.1	338	20.8
483.xalancbmk	215	32.1	218	31.7	224	30.8	215	32.1	218	31.7	224	30.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Turbo Boost Power Optimization set to Traditional

General Notes

OMP_NUM_THREADS set to number of cores
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 36.3

IBM System x3850 X5 (Intel Xeon E7-8837)

SPECint_base2006 = 34.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 36.3

IBM System x3850 X5 (Intel Xeon E7-8837)

SPECint_base2006 = 34.1

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 36.3

IBM System x3850 X5 (Intel Xeon E7-8837)

SPECint_base2006 = 34.1

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 36.3

IBM System x3850 X5 (Intel Xeon E7-8837)

SPECint_base2006 = 34.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Apr-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:19:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.