



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 180

PowerEdge M610 (Intel Xeon E5620, 2.40 GHz)

SPECfp\_rate\_base2006 = 174

CPU2006 license: 55


Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

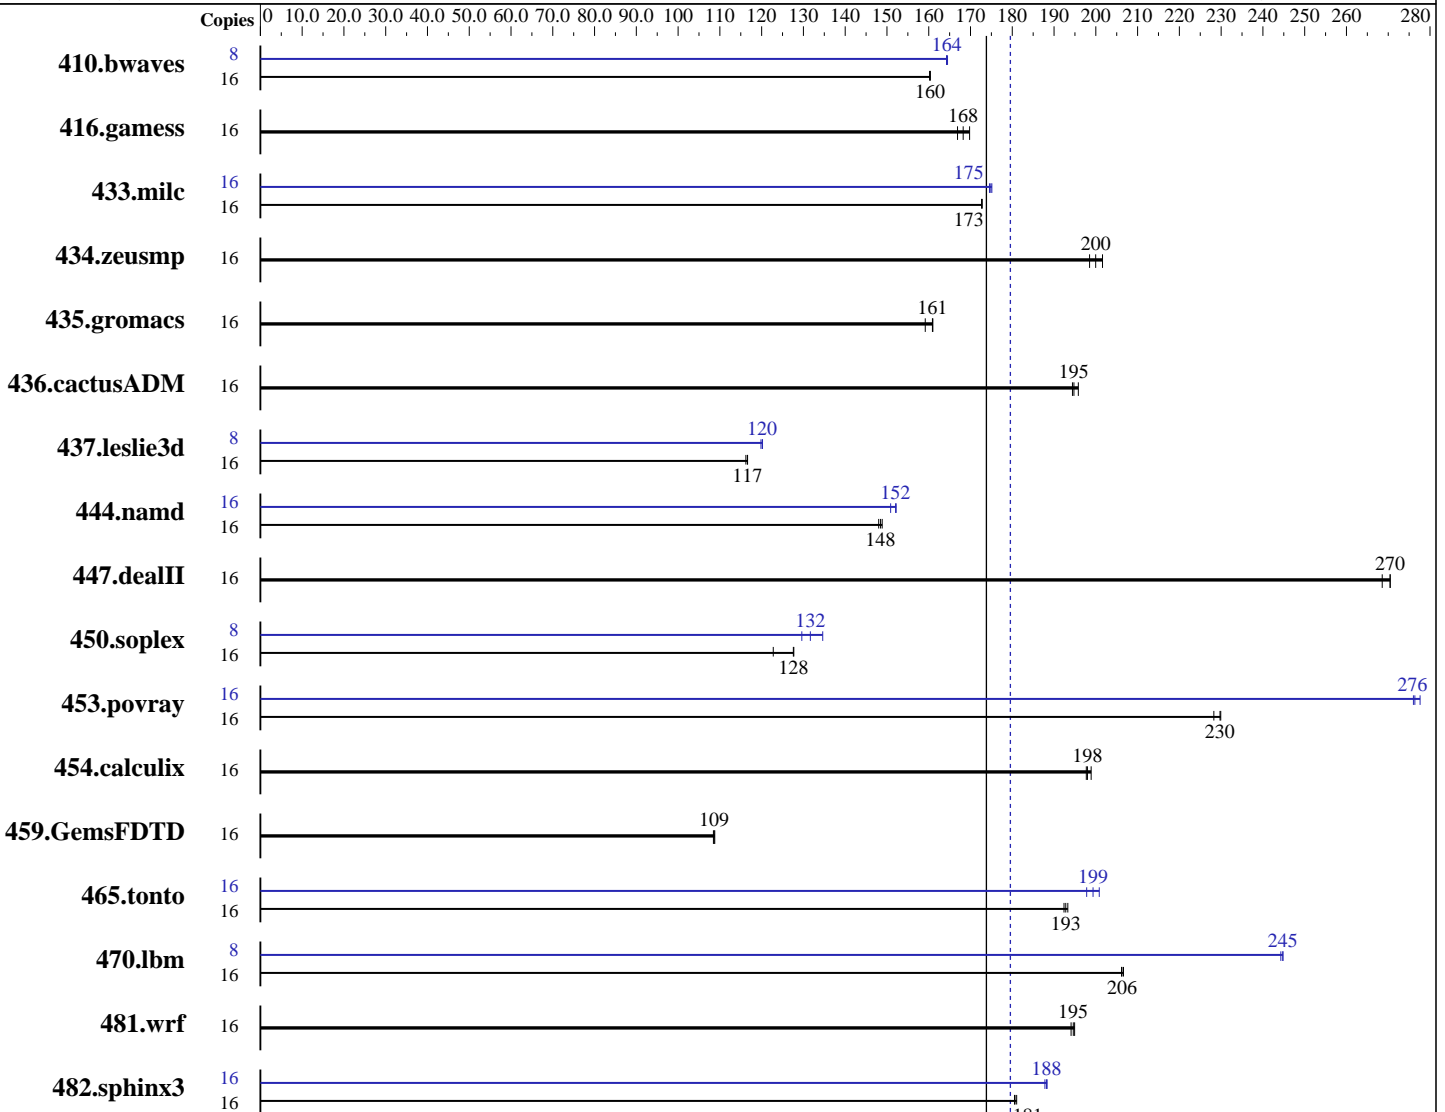

SPECfp\_rate\_base2006 = 174

SPECfp\_rate2006 = 180

## Hardware

CPU Name: Intel Xeon E5620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 180

PowerEdge M610 (Intel Xeon E5620, 2.40 GHz)

SPECfp\_rate\_base2006 = 174

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)  
Disk Subsystem: 1 x 146 GB 10000 RPM SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1356	160	<b>1356</b>	<b>160</b>	1357	160	8	661	164	662	164	<b>662</b>	<b>164</b>		
416.gamess	16	1877	167	1845	170	<b>1862</b>	<b>168</b>	16	1877	167	1845	170	<b>1862</b>	<b>168</b>		
433.milc	16	850	173	851	173	<b>850</b>	<b>173</b>	16	842	175	<b>840</b>	<b>175</b>	839	175		
434.zeusmp	16	722	202	<b>728</b>	<b>200</b>	733	199	16	722	202	<b>728</b>	<b>200</b>	733	199		
435.gromacs	16	710	161	<b>710</b>	<b>161</b>	718	159	16	710	161	<b>710</b>	<b>161</b>	718	159		
436.cactusADM	16	<b>982</b>	<b>195</b>	976	196	984	194	16	<b>982</b>	<b>195</b>	976	196	984	194		
437.leslie3d	16	1294	116	1289	117	<b>1290</b>	<b>117</b>	8	626	120	628	120	<b>626</b>	<b>120</b>		
444.namd	16	867	148	<b>864</b>	<b>148</b>	862	149	16	843	152	<b>844</b>	<b>152</b>	850	151		
447.dealII	16	<b>677</b>	<b>270</b>	677	270	682	269	16	<b>677</b>	<b>270</b>	677	270	682	269		
450.soplex	16	1087	123	<b>1046</b>	<b>128</b>	1045	128	8	515	130	<b>507</b>	<b>132</b>	496	135		
453.povray	16	<b>371</b>	<b>230</b>	370	230	373	228	16	<b>308</b>	<b>276</b>	308	276	307	278		
454.calculix	16	664	199	<b>667</b>	<b>198</b>	668	198	16	664	199	<b>667</b>	<b>198</b>	668	198		
459.GemsFDTD	16	1561	109	1565	108	<b>1563</b>	<b>109</b>	16	1561	109	1565	108	<b>1563</b>	<b>109</b>		
465.tonto	16	818	192	815	193	<b>817</b>	<b>193</b>	16	796	198	<b>790</b>	<b>199</b>	784	201		
470.lbm	16	1064	207	1066	206	<b>1066</b>	<b>206</b>	8	<b>449</b>	<b>245</b>	450	244	449	245		
481.wrf	16	<b>918</b>	<b>195</b>	917	195	921	194	16	<b>918</b>	<b>195</b>	917	195	921	194		
482.sphinx3	16	1727	181	<b>1726</b>	<b>181</b>	1722	181	16	1656	188	1660	188	<b>1657</b>	<b>188</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages  
echo 7200 > /proc/sys/vm/nr\_hugepages  
export HUGETLB\_MORECORE=yes  
export LD\_PRELOAD=/usr/lib64/libhugetlbfs.so



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 180

PowerEdge M610 (Intel Xeon E5620, 2.40 GHz)

SPECfp\_rate\_base2006 = 174

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

Data Reuse = Disabled (Default = Enabled)

## General Notes

Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 180

PowerEdge M610 (Intel Xeon E5620, 2.40 GHz)

SPECfp\_rate\_base2006 = 174

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 180

PowerEdge M610 (Intel Xeon E5620, 2.40 GHz)

SPECfp\_rate\_base2006 = 174

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 180

PowerEdge M610 (Intel Xeon E5620, 2.40 GHz)

SPECfp\_rate\_base2006 = 174

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

465.tonto (continued):

`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:46:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.