



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]2006 = 39.5

PowerEdge R410 (Intel Xeon X5650, 2.66 GHz)

SPECint_base2006 = 37.5

CPU2006 license: 55


Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

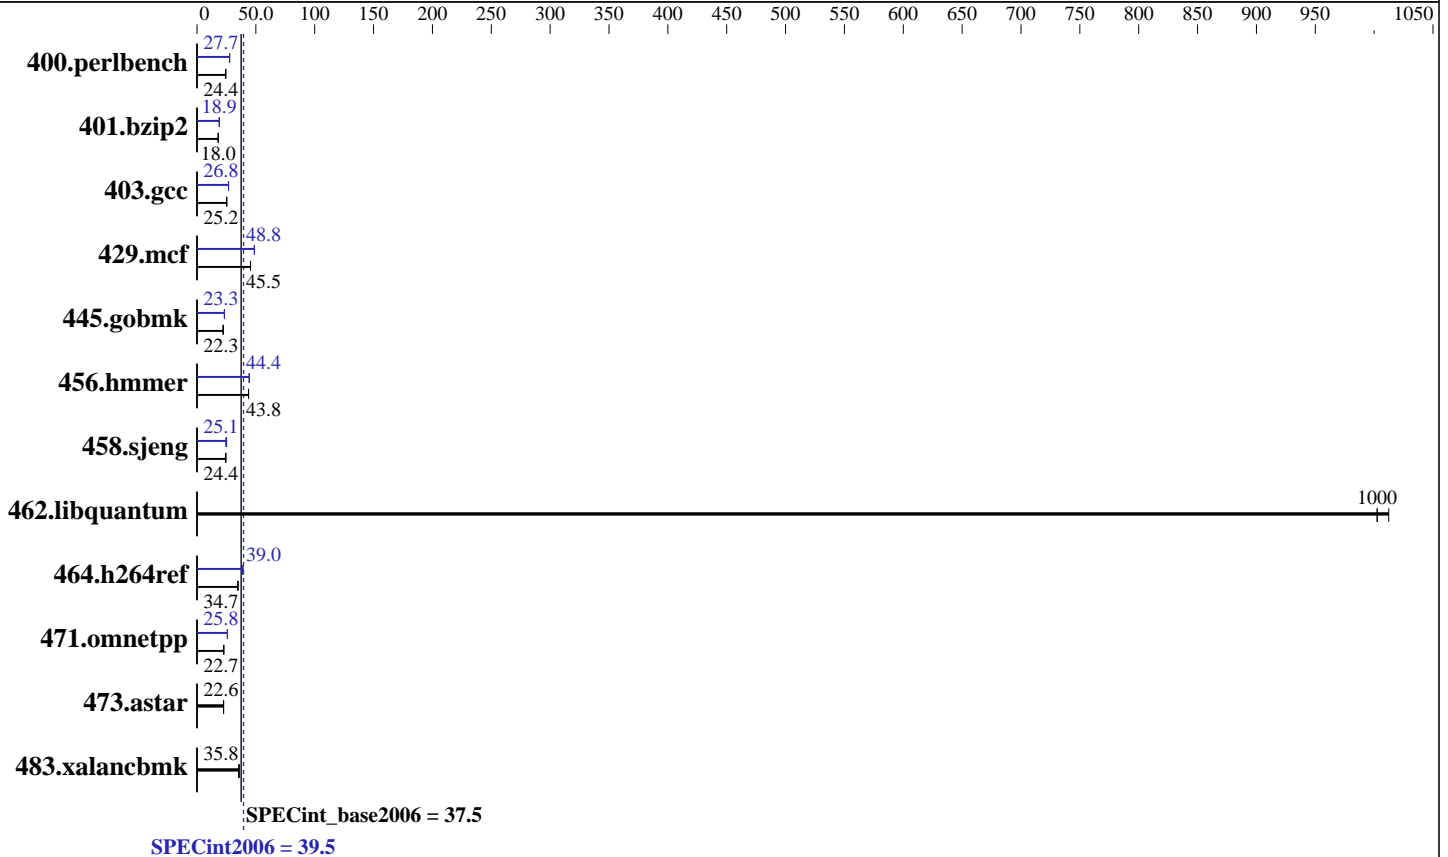

Hardware

CPU Name: Intel Xeon X5650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 39.5

PowerEdge R410 (Intel Xeon X5650, 2.66 GHz)

SPECint_base2006 = 37.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2011
Hardware Availability: Mar-2010
Software Availability: Jan-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	401	24.4	399	24.5	401	24.3	353	27.7	353	27.7	353	27.7
401.bzip2	535	18.0	535	18.0	535	18.0	509	18.9	509	18.9	509	18.9
403.gcc	319	25.2	319	25.2	319	25.3	301	26.8	300	26.8	301	26.8
429.mcf	201	45.4	201	45.5	201	45.5	187	48.8	187	48.7	187	48.8
445.gobmk	476	22.1	469	22.4	469	22.3	450	23.3	451	23.3	450	23.3
456.hammer	213	43.8	213	43.8	213	43.8	210	44.4	210	44.4	210	44.4
458.sjeng	495	24.4	495	24.4	495	24.4	481	25.1	495	24.5	482	25.1
462.libquantum	20.5	1010	20.7	1000	20.7	1000	20.5	1010	20.7	1000	20.7	1000
464.h264ref	637	34.7	637	34.7	633	35.0	568	39.0	568	39.0	568	39.0
471.omnetpp	275	22.7	275	22.7	275	22.7	242	25.8	242	25.8	241	25.9
473.astar	311	22.6	311	22.6	312	22.5	311	22.6	311	22.6	312	22.5
483.xalancbmk	192	35.8	193	35.8	195	35.4	192	35.8	193	35.8	195	35.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Data Reuse = Disabled (Default = Enabled)
Logical Processor = Disabled (Default = Enabled)

General Notes

OMP_NUM_THREADS set to number of cores

The Dell PowerEdge R410 and the Bull NovaScale R430 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R410 model. Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 39.5

PowerEdge R410 (Intel Xeon X5650, 2.66 GHz)

SPECint_base2006 = 37.5

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 39.5

PowerEdge R410 (Intel Xeon X5650, 2.66 GHz)

SPECint_base2006 = 37.5

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

429.mcf: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc -opt-malloc-options=3 -auto-ilp32 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

429.mcf: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 39.5

PowerEdge R410 (Intel Xeon X5650, 2.66 GHz)

SPECint_base2006 = 37.5

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 39.5

PowerEdge R410 (Intel Xeon X5650, 2.66 GHz)

SPECint_base2006 = 37.5

CPU2006 license: 55

Test date: Jun-2011

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:34:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 August 2011.