



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp®_rate2006 = 117

Servidor Itautec MX203 (Intel Xeon E5645)

SPECfp_rate_base2006 = 114

CPU2006 license: 9001


Test date: Sep-2011

Test sponsor: Itautec

Hardware Availability: Jul-2011

Tested by: Itautec

Software Availability: Jan-2011

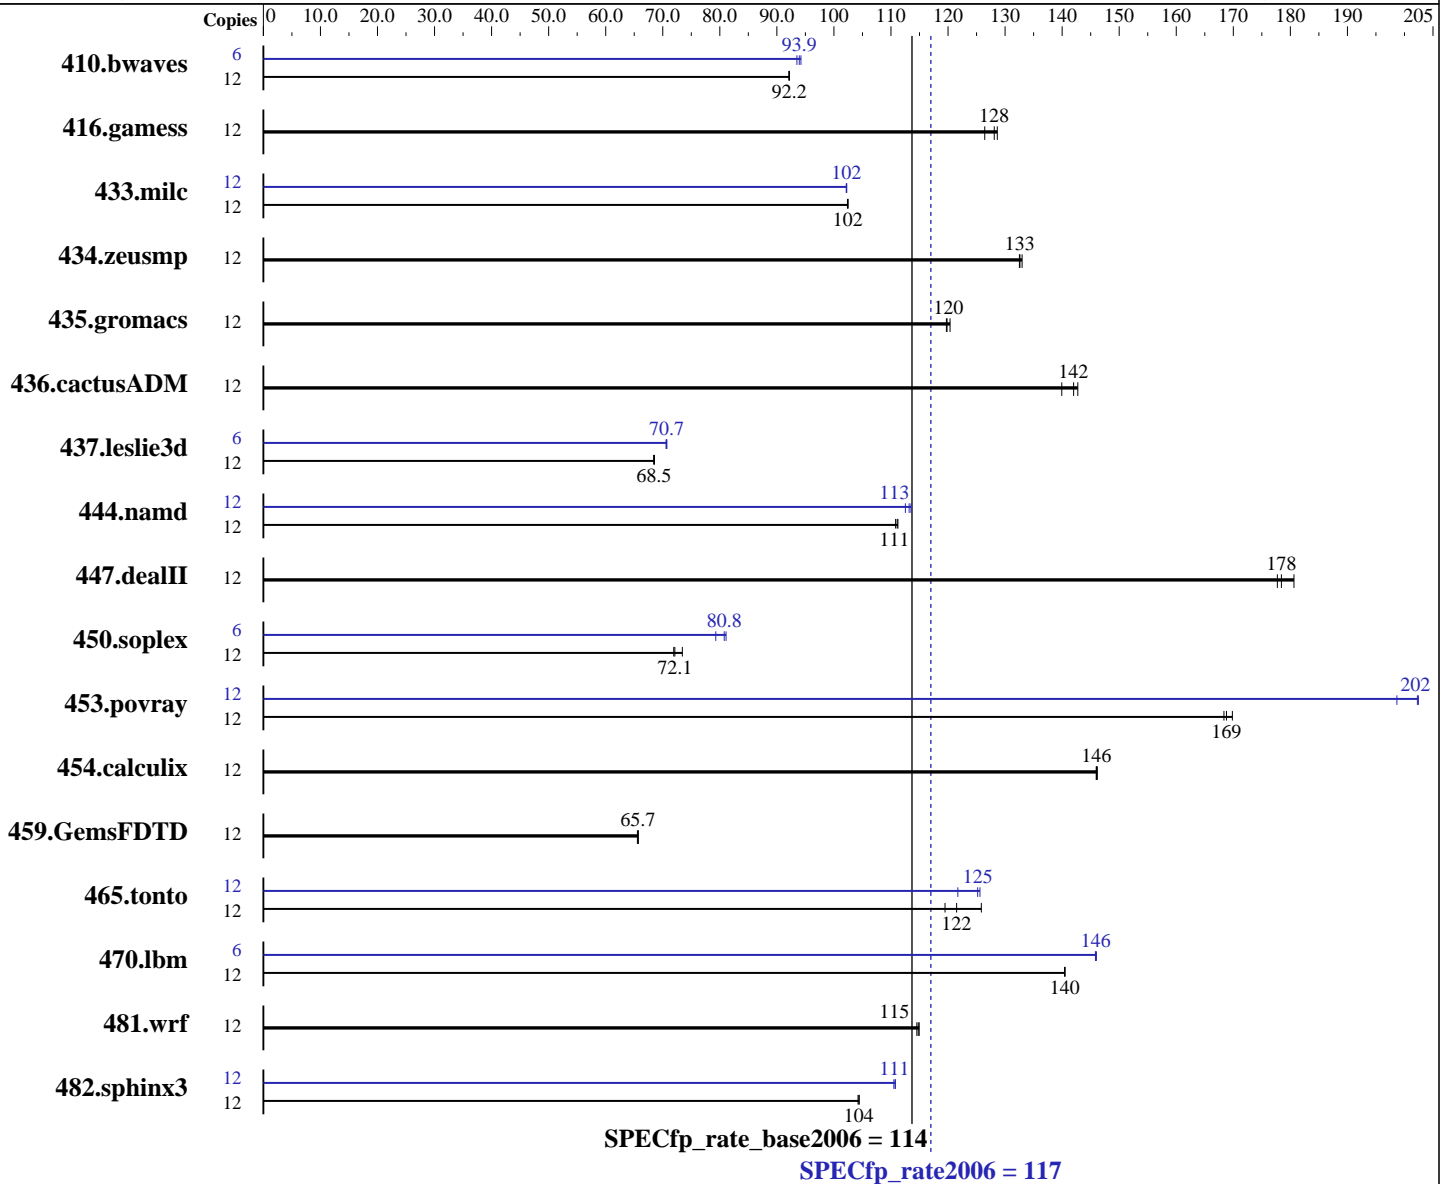

Hardware

CPU Name: Intel Xeon E5645
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2 Build 20110112
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 117

Servidor Itautec MX203 (Intel Xeon E5645)

SPECfp_rate_base2006 = 114

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Sep-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1768	92.2	<u>1769</u>	<u>92.2</u>	1771	92.1	6	865	94.2	<u>868</u>	<u>93.9</u>	872	93.5
416.gamess	12	1827	129	1858	126	<u>1834</u>	<u>128</u>	12	1827	129	1858	126	<u>1834</u>	<u>128</u>
433.milc	12	<u>1076</u>	<u>102</u>	1076	102	1075	102	12	1078	102	<u>1078</u>	<u>102</u>	1077	102
434.zeusmp	12	821	133	824	133	<u>824</u>	<u>133</u>	12	821	133	824	133	<u>824</u>	<u>133</u>
435.gromacs	12	712	120	<u>715</u>	<u>120</u>	716	120	12	712	120	<u>715</u>	<u>120</u>	716	120
436.cactusADM	12	1005	143	<u>1010</u>	<u>142</u>	1025	140	12	1005	143	<u>1010</u>	<u>142</u>	1025	140
437.leslie3d	12	1649	68.4	<u>1647</u>	<u>68.5</u>	1645	68.6	6	<u>798</u>	<u>70.7</u>	799	70.6	798	70.7
444.namd	12	865	111	869	111	<u>866</u>	<u>111</u>	12	<u>850</u>	<u>113</u>	848	114	855	113
447.dealII	12	760	181	<u>769</u>	<u>178</u>	772	178	12	760	181	<u>769</u>	<u>178</u>	772	178
450.soplex	12	1392	71.9	<u>1388</u>	<u>72.1</u>	1363	73.4	6	631	79.3	<u>620</u>	<u>80.8</u>	617	81.1
453.povray	12	379	168	<u>378</u>	<u>169</u>	376	170	12	321	199	315	202	<u>316</u>	<u>202</u>
454.calculix	12	678	146	<u>678</u>	<u>146</u>	677	146	12	678	146	<u>678</u>	<u>146</u>	677	146
459.GemsFDTD	12	1942	65.6	<u>1938</u>	<u>65.7</u>	1938	65.7	12	1942	65.6	<u>1938</u>	<u>65.7</u>	1938	65.7
465.tonto	12	<u>972</u>	<u>122</u>	988	119	938	126	12	970	122	940	126	<u>943</u>	<u>125</u>
470.lbm	12	1173	141	<u>1174</u>	<u>140</u>	1174	140	6	565	146	565	146	<u>565</u>	<u>146</u>
481.wrf	12	1170	115	<u>1168</u>	<u>115</u>	1166	115	12	1170	115	<u>1168</u>	<u>115</u>	1166	115
482.sphinx3	12	2240	104	<u>2240</u>	<u>104</u>	2244	104	12	2116	111	<u>2112</u>	<u>111</u>	2112	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Data Reuse disabled in BIOS.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 117

Servidor Itautec MX203 (Intel Xeon E5645)

SPECfp_rate_base2006 = 114

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Sep-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

General Notes

This result was measured on the Servidor Itautec MX203
The Servidor Itautec MX203 and the Servidor Itautec MX223
are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 117

Servidor Itaotec MX203 (Intel Xeon E5645)

SPECfp_rate_base2006 = 114

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Sep-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 117

Servidor Itaotec MX203 (Intel Xeon E5645)

SPECfp_rate_base2006 = 114

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Sep-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 117

Servidor Itautec MX203 (Intel Xeon E5645)

SPECfp_rate_base2006 = 114

CPU2006 license: 9001

Test date: Sep-2011

Test sponsor: Itautec

Hardware Availability: Jul-2011

Tested by: Itautec

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:39:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 October 2011.