



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]_rate2006 = 509

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 496

CPU2006 license: 9019


Test date: Mar-2012

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

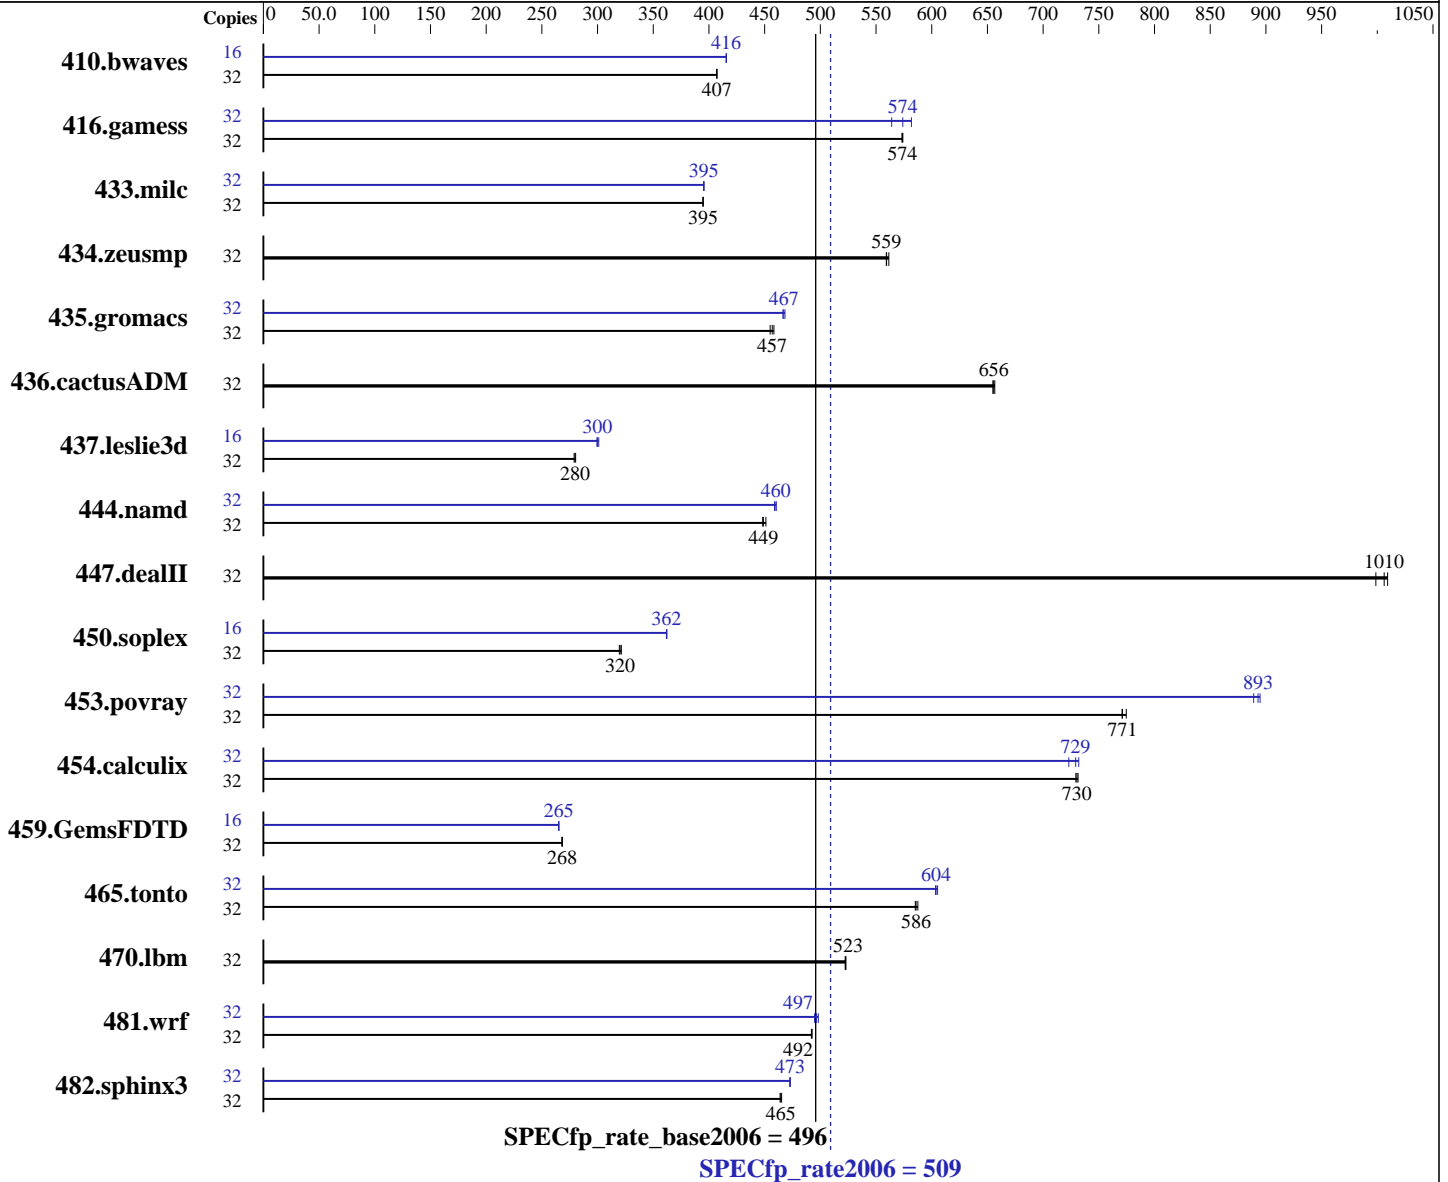

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 509

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 496

CPU2006 license: 9019

Test date: Mar-2012

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 300 GB SAS 15 K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|------------|-------------|-------------|------------|-------------|------------|--------|-------------|-------------|------------|------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 32 | 1068 | 407 | <u>1068</u> | <u>407</u> | 1069 | 407 | 16 | 523 | 416 | 523 | 416 | <u>523</u> | <u>416</u> |
| 416.gamess | 32 | 1091 | 574 | <u>1092</u> | <u>574</u> | 1093 | 573 | 32 | <u>1092</u> | <u>574</u> | 1077 | 582 | 1111 | 564 |
| 433.milc | 32 | <u>744</u> | <u>395</u> | 744 | 395 | 744 | 395 | 32 | 743 | 396 | <u>743</u> | <u>395</u> | 743 | 395 |
| 434.zeusmp | 32 | 521 | 559 | 519 | 561 | <u>520</u> | <u>559</u> | 32 | 521 | 559 | 519 | 561 | <u>520</u> | <u>559</u> |
| 435.gromacs | 32 | 499 | 458 | 502 | 455 | <u>500</u> | <u>457</u> | 32 | <u>489</u> | <u>467</u> | 488 | 468 | 490 | 466 |
| 436.cactusADM | 32 | 582 | 657 | 584 | 655 | <u>583</u> | <u>656</u> | 32 | 582 | 657 | 584 | 655 | <u>583</u> | <u>656</u> |
| 437.leslie3d | 32 | 1073 | 280 | 1078 | 279 | <u>1075</u> | <u>280</u> | 16 | <u>501</u> | <u>300</u> | 502 | 299 | 500 | 301 |
| 444.namd | 32 | 569 | 451 | 573 | 448 | <u>572</u> | <u>449</u> | 32 | 558 | 460 | <u>558</u> | <u>460</u> | 559 | 459 |
| 447.dealII | 32 | <u>364</u> | <u>1010</u> | 363 | 1010 | 367 | 999 | 32 | <u>364</u> | <u>1010</u> | 363 | 1010 | 367 | 999 |
| 450.soplex | 32 | <u>833</u> | <u>320</u> | 835 | 320 | 830 | 321 | 16 | 368 | 362 | 369 | 362 | <u>369</u> | <u>362</u> |
| 453.povray | 32 | <u>221</u> | <u>771</u> | 221 | 771 | 220 | 775 | 32 | 190 | 895 | <u>191</u> | <u>893</u> | 191 | 889 |
| 454.calculix | 32 | 362 | 729 | 361 | 731 | <u>361</u> | <u>730</u> | 32 | 361 | 732 | 365 | 723 | <u>362</u> | <u>729</u> |
| 459.GemsFDTD | 32 | 1267 | 268 | 1265 | 268 | <u>1266</u> | <u>268</u> | 16 | 641 | 265 | 640 | 265 | <u>640</u> | <u>265</u> |
| 465.tonto | 32 | 538 | 585 | <u>537</u> | <u>586</u> | 536 | 588 | 32 | 520 | 605 | 522 | 603 | <u>521</u> | <u>604</u> |
| 470.lbm | 32 | 841 | 523 | 842 | 522 | <u>841</u> | <u>523</u> | 32 | 841 | 523 | 842 | 522 | <u>841</u> | <u>523</u> |
| 481.wrf | 32 | 726 | 493 | <u>726</u> | <u>492</u> | 727 | 492 | 32 | <u>720</u> | <u>497</u> | 722 | 495 | 717 | 498 |
| 482.sphinx3 | 32 | 1345 | 464 | <u>1343</u> | <u>465</u> | 1341 | 465 | 32 | <u>1319</u> | <u>473</u> | 1319 | 473 | 1319 | 473 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
 Intel(R) Hyper-Threading Technology set to Enabled
 Processor Power State C6 set to Disabled
 Processor Power State C1 Enhanced set to Disabled
 Power Technology set to Custom

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 509

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 496

CPU2006 license: 9019

Test date: Mar-2012

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Platform Notes (Continued)

Energy Performance set to Performance
 DRAM Clock Throttling set to Performance
 Sysinfo program /usr/cpu2006-1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Thu Mar 1 15:43:51 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 8
  siblings    : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size    : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132133412 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 2 Mar 1 15:20

```
SPEC is set to: /usr/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4      274G  28G  233G  11% /
```

```
Additional information from dmidecode:
Memory:
16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 509

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 496

CPU2006 license: 9019

Test date: Mar-2012

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006-1.2/libs/32:/usr/cpu2006-1.2/libs/64"

Binaries compiled on a system with 2 x Xeon X5650 CPU + 16GB memory
running RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 509

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 496

CPU2006 license: 9019

Test date: Mar-2012

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 509

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 496

CPU2006 license: 9019

Test date: Mar-2012

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 509

Cisco UCS C220 M3 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 496

CPU2006 license: 9019

Test date: Mar-2012

Test sponsor: Cisco Systems

Hardware Availability: Apr-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:36:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2012.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7