



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2042G-6RF
(H8QG6-F, AMD Opteron 6276)

SPECint®_rate2006 = 1010

SPECint_rate_base2006 = 887

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

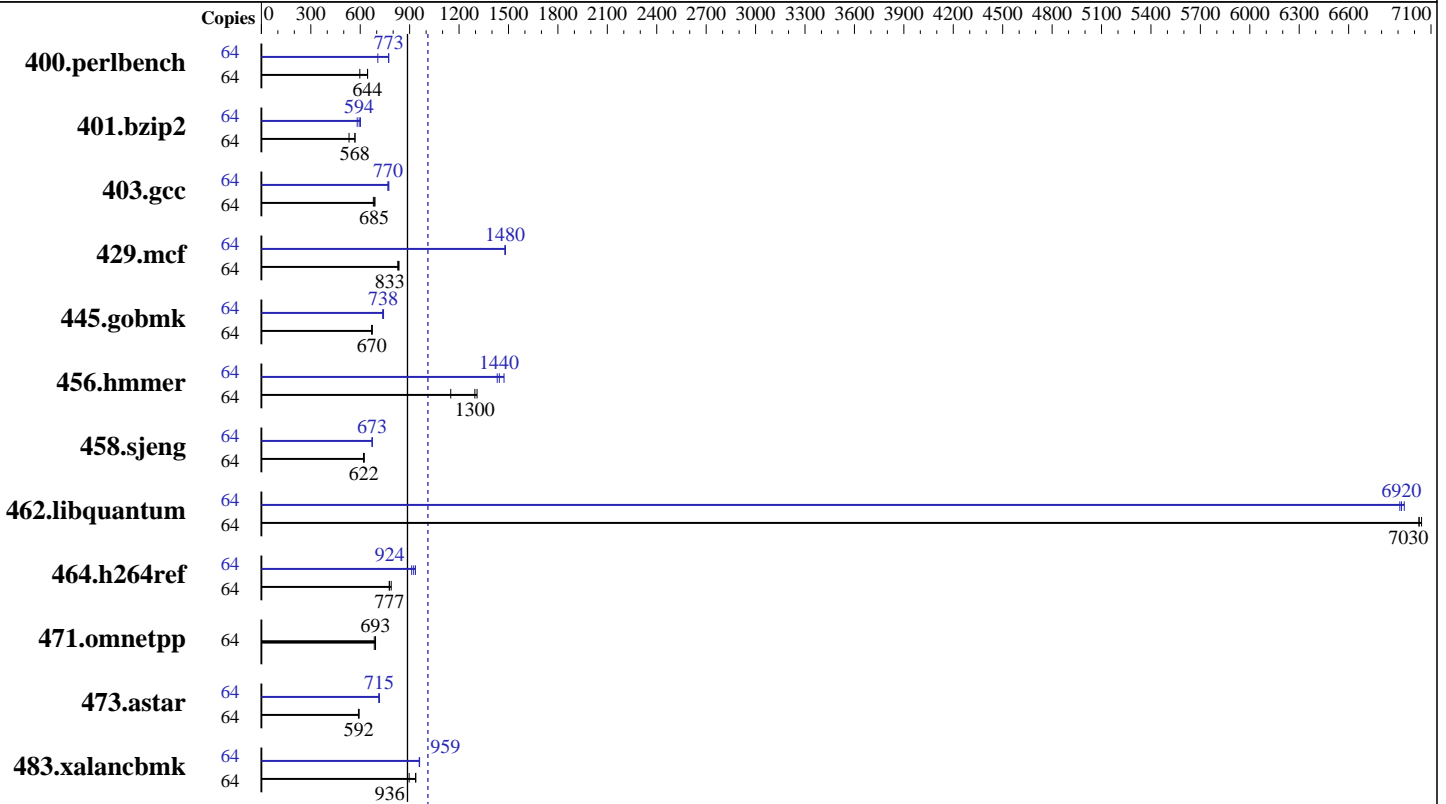

SPECint_rate2006 = 1010

SPECint_rate_base2006 = 887

Hardware

CPU Name: AMD Opteron 6276
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite
(from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2042G-6RF
(H8QG6-F, AMD Opteron 6276)

SPECint_rate2006 = 1010

SPECint_rate_base2006 = 887

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1046	598	970	645	970	644	64	885	707	809	773	809	773
401.bzip2	64	1161	532	1088	568	1087	568	64	1062	582	1040	594	1027	601
403.gcc	64	752	685	747	690	758	680	64	670	770	666	774	670	769
429.mcf	64	701	833	705	828	699	835	64	394	1480	395	1480	394	1480
445.gobmk	64	997	673	1002	670	1002	670	64	905	742	911	737	909	738
456.hammer	64	519	1150	456	1310	461	1300	64	417	1430	413	1440	405	1470
458.sjeng	64	1240	624	1244	622	1250	620	64	1151	673	1151	673	1151	673
462.libquantum	64	189	7030	189	7030	188	7040	64	191	6940	192	6920	192	6910
464.h264ref	64	1822	777	1825	776	1797	788	64	1514	935	1532	924	1552	912
471.omnetpp	64	577	693	577	693	584	685	64	577	693	577	693	584	685
473.astar	64	763	589	759	592	759	592	64	630	713	627	717	628	715
483.xalancbmk	64	492	897	472	936	471	937	64	460	959	461	959	460	961

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/mnt/sda3/cpu2006/amd1104-rate-libs-revC/32:/mnt/sda3/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2042G-6RF
(H8QG6-F, AMD Opteron 6276)

SPECint_rate2006 = 1010

SPECint_rate_base2006 = 887

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2012
Hardware Availability: Nov-2011
Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2042G-6RF
(H8QG6-F, AMD Opteron 6276)

SPECint_rate2006 = 1010

SPECint_rate_base2006 = 887

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
 -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bd=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 1010

Supermicro A+ Server 2042G-6RF
(H8QG6-F, AMD Opteron 6276)

SPECint_rate_base2006 = 887

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Nov-2011

Tested by: Supermicro

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000
-IPA:small_pu=100 -HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2042G-6RF
(H8QG6-F, AMD Opteron 6276)

SPECint_rate2006 = 1010

SPECint_rate_base2006 = 887

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 08:13:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2012.