



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®_rate2006 = 575

BladeSymphony BS320 (Intel Xeon E5-2470)

SPECint_rate_base2006 = 552

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

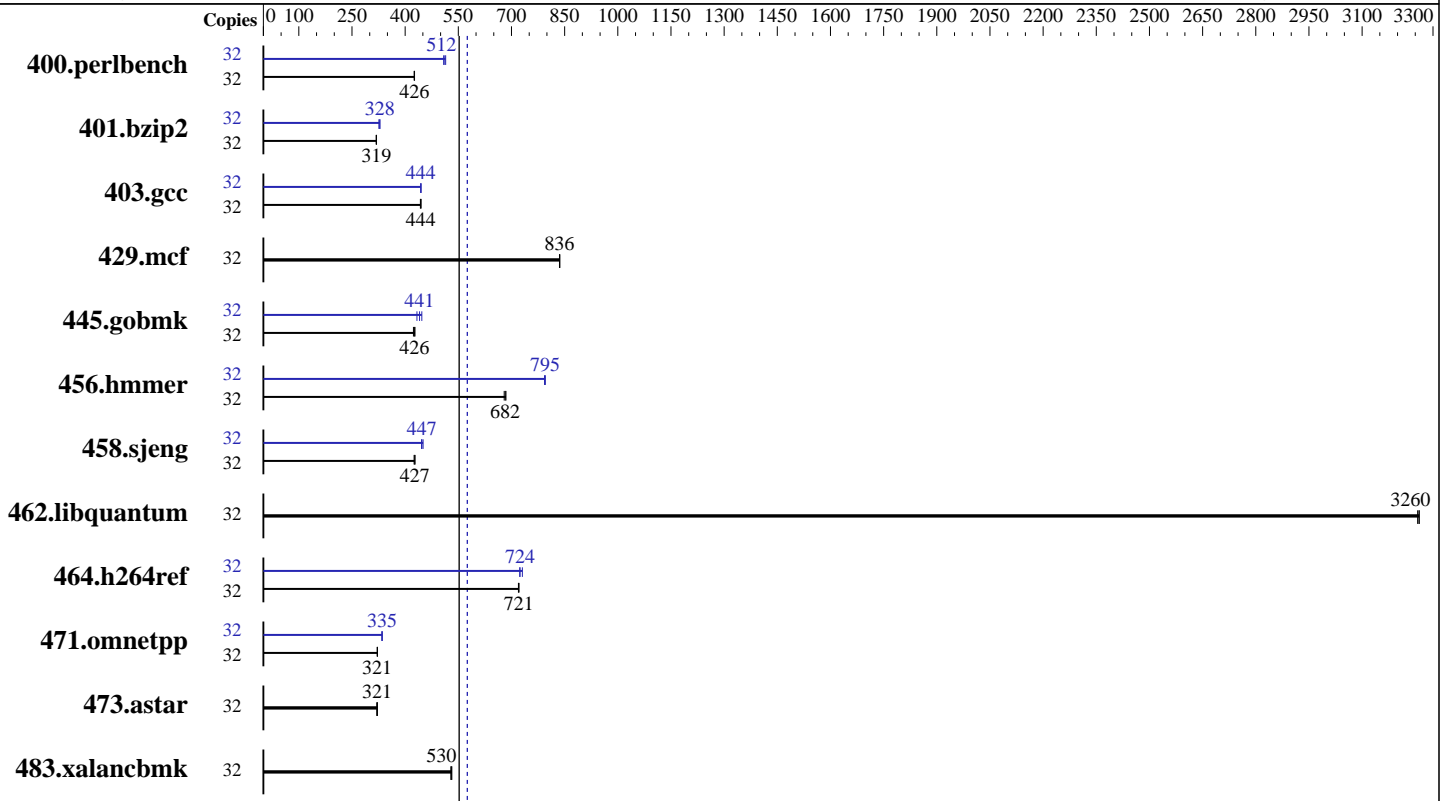

SPECint_rate2006 = 575

SPECint_rate_base2006 = 552

Hardware

CPU Name: Intel Xeon E5-2470
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 2 x 147 GB SAS, 15000 RPM RAID1 configuration
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86_64
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 575

BladeSymphony BS320 (Intel Xeon E5-2470)

SPECint_rate_base2006 = 552

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: May-2012
Hardware Availability: Jun-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	735	426	<u>734</u>	<u>426</u>	733	426	32	<u>611</u>	<u>512</u>	615	509	608	514
401.bzip2	32	971	318	<u>968</u>	<u>319</u>	967	319	32	948	326	<u>941</u>	<u>328</u>	939	329
403.gcc	32	<u>580</u>	<u>444</u>	581	443	579	445	32	580	444	579	445	<u>580</u>	<u>444</u>
429.mcf	32	349	835	349	836	<u>349</u>	<u>836</u>	32	349	835	349	836	<u>349</u>	<u>836</u>
445.gobmk	32	<u>788</u>	<u>426</u>	785	428	793	423	32	775	433	<u>762</u>	<u>441</u>	751	447
456.hammer	32	436	684	<u>437</u>	<u>682</u>	439	679	32	375	795	<u>376</u>	<u>795</u>	376	793
458.sjeng	32	911	425	905	428	<u>906</u>	<u>427</u>	32	<u>866</u>	<u>447</u>	859	451	868	446
462.libquantum	32	203	3260	<u>203</u>	<u>3260</u>	204	3260	32	203	3260	<u>203</u>	<u>3260</u>	204	3260
464.h264ref	32	984	720	<u>983</u>	<u>721</u>	982	721	32	969	731	<u>978</u>	<u>724</u>	979	723
471.omnetpp	32	622	321	622	322	<u>622</u>	<u>321</u>	32	597	335	<u>597</u>	<u>335</u>	598	335
473.astar	32	702	320	699	321	<u>699</u>	<u>321</u>	32	702	320	699	321	<u>699</u>	<u>321</u>
483.xalancbmk	32	<u>416</u>	<u>530</u>	415	532	417	529	32	<u>416</u>	<u>530</u>	415	532	417	529

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Wed May 30 07:27:42 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2470 0 @ 2.30GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 575

BladeSymphony BS320 (Intel Xeon E5-2470)

SPECint_rate_base2006 = 552

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      99040924 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 30 07:22
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 575

BladeSymphony BS320 (Intel Xeon E5-2470)

SPECint_rate_base2006 = 552

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 575

BladeSymphony BS320 (Intel Xeon E5-2470)

SPECint_rate_base2006 = 552

CPU2006 license: 35

Test date: May-2012

Test sponsor: HITACHI

Hardware Availability: Jun-2012

Tested by: HITACHI

Software Availability: Feb-2012

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 575

BladeSymphony BS320 (Intel Xeon E5-2470)

SPECint_rate_base2006 = 552

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 08:37:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 June 2012.